

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













GENERAL


THIN-PACs are extremely thin, highly efficient surface mount inductors specifically designed for applications where physical size, especially component height, is critical. With heights as low as 1.8 mm, THIN-PACs offer circuit design engineers a choice of very powerful inductors in very small and thin packages.

THIN-PACs deliver inductance values from 0.47 to 47.0 μ H with current ranges from 0.59 to 2.8 Amps. They are manufactured using toroidal cores for low EMI, high Q, and high efficiency. The devices incorporate advanced technology materials and processes resulting in the highest possible power density in the thinnest possible case.

THIN-PACs provide circuit design engineers the highest performance to height ratio of any SMT inductors. Their ideal applications include DC-DC converters, PC cards, disk drives, and small-scale power supplies.

THIN-PACs are packaged on standard 13" reels to facilitate pick-and-place assembly. Their rugged construction permits normal exposure to infrared reflow soldering to +240°C.

In addition to the standard inductance values shown, modified THIN-PAC inductors are available to meet your high volume requirements.

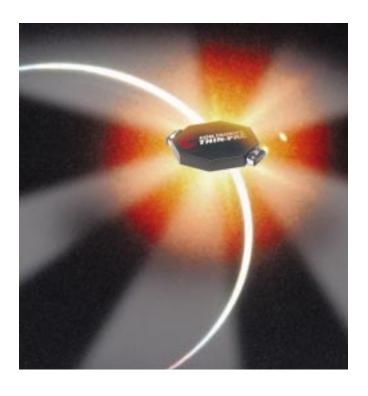






FEATURE - BENEFITS

- · Ultrathin Product Profile as Thin as 1.8 mm
- Highest Performance to Height Ratio of Any SMT Inductors
- Inductance Range from 0.47 to 47.0 µH
- Current Range from 0.59 to 2.8 Amps
- Toroidal Cores provide Low EMI
- · High Efficiency and High Q
- Supplied in Tape-and-Reel Packaging for Pick-and-Place Assembly
- Modified Standard Products Available

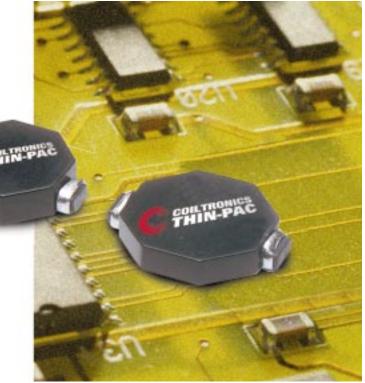

Coiltronics designs and manufactures standard and custom electromagnetic components. Contact the factory or your Coiltronics representative with your transformer and inductor requirements.

THIN-PAC 1 FAMILY TABLE

Part Number	Inductance μΗ (rated)	OCL ⁽¹⁾ μΗ +/-20%	I _{RMS} ⁽²⁾ Amperes	I _{SAT} ⁽³⁾ Amperes	DCR ⁽⁴⁾ Ohms max.
TP1-R47	0.47	0.544	1.7	3.0	0.1085
*TP1-1R0	1.0	1.17	1.5	2.6	0.1401
TP1-1R5	1.5	1.57	1.4	2.2	0.1560
*TP1-2R2	2.2	2.55	1.3	1.8	0.1876
TP1-3R3	3.3	3.73	1.2	1.5	0.2246
*TP1-4R7	4.7	5.10	1.1	1.3	0.2647
TP1-6R8	6.8	7.45	0.96	1.1	0.3240
*TP1-100	10.0	10.31	0.90	0.92	0.3739
*TP1-150	15.0	16.57	0.81	0.73	0.4612
*TP1-220	22.0	24.25	0.74	0.60	0.5483
*TP1-330	33.0	38.56	0.66	0.47	0.6847
*TP1-470	47.0	49.49	0.62	0.43	0.7699


Notes:


- (1) Open Circuit Inductance Test Parameters: 100 KHz, 0.250 Vrms, 0.0 Adc.
- (2) RMS current for an approximate ΔT of 40°C. at an ambient temperature of 85°C.
- (3) Peak current for approximately 30% rolloff.
- (4) Values @ 20°C.

*BOLD are available from stock


Coiltronics Incorporated reserves the right to change component specifications without notice.

MECHANICAL DIAGRAM TOP VIEW







PCB PAD LAYOUT



CONNECTION DIAGRAM




PACKAGING INFORMATION
Parts are packaged on 13" reels. 2250 parts per reel.

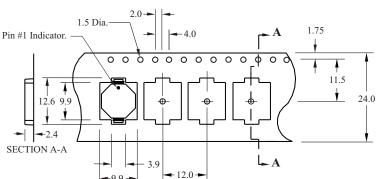


Direction of feed

TP1-1R0

Typical Inductance & Energy vs Saturation Current




TP1-100
Typical Inductance & Energy vs Saturation Current



TP1-470

Typical Inductance & Energy vs Saturation Current



ACTUAL SIZE THIN PAC 1



THIN-PAC 2 FAMILY TABLE

Part Number	Inductance μΗ (rated)	OCL ⁽¹⁾ μΗ +/-20%	I _{RMS} ⁽²⁾ Amperes	I _{SAT} ⁽³⁾ Amperes	DCR ⁽⁴⁾ Ohms max.
TP2-R47	0.47	0.399	2.2	3.2	0.0537
*TP2-1R0	1.0	1.00	1.8	2.1	0.0805
TP2-1R5	1.5	1.53	1.7	1.7	0.0910
*TP2-2R2	2.2	2.15	1.5	1.4	0.1110
TP2-3R3	3.3	3.45	1.4	1.1	0.1328
*TP2-4R7	4.7	4.56	1.3	0.97	0.1472
TP2-6R8	6.8	6.84	1.2	0.80	0.1797
*TP2-100	10.0	9.53	1.1	0.68	0.2151
*TP2-150	15.0	14.83	1.0	0.54	0.2512
*TP2-220	22.0	23.11	0.88	0.44	0.3269
*TP2-330	33.0	32.34	0.67	0.37	0.5677
*TP2-470	47.0	47.68	0.60	0.30	0.6962

Notes:


- (1) Open Circuit Inductance Test Parameters: 100 KHz, 0.250 Vrms, 0.0 Adc.
- (2) RMS current for an approximate ΔT of 40°C. at an ambient temperature of 85°C.
- (3) Peak current for approximately 30% rolloff.
- (4) Values @ 20°C.


*BOLD are available from stock


Coiltronics Incorporated reserves the right to change component specifications without notice.

MECHANICAL DIAGRAM

TOP VIEW








CONNECTION DIAGRAM




PACKAGING INFORMATION


Parts are packaged on 13" reels. 2000 parts per reel.

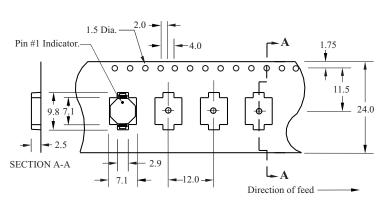


TP2-1R0



TP2-100
Typical Inductance & Energy vs Saturation Current



TP2-470
Typical Inductance & Energy vs Saturation Current



THIN-PAC[™]

THIN-PAC 3 FAMILY TABLE

Part Number	Inductance μΗ (rated)	OCL ⁽¹⁾ μΗ +/-20%	I _{RMS} ⁽²⁾ Amperes	I _{SAT} ⁽³⁾ Amperes	DCR ⁽⁴⁾ Ohms max.
TP3-R47	0.47	0.417	2.6	4.2	0.0644
*TP3-1R0	1.0	1.15	2.1	3.4	0.0949
TP3-1R5	1.5	1.65	2.0	2.8	0.1064
*TP3-2R2	2.2	2.24	1.8	2.4	0.1241
TP3-3R3	3.3	3.68	1.7	1.9	0.1471
*TP3-4R7	4.7	5.45	1.5	1.6	0.1806
TP3-6R8	6.8	7.47	1.4	1.3	0.2051
*TP3-100	10.0	11.09	1.3	1.1	0.2550
*TP3-150	15.0	15.17	1.2	0.97	0.2966
*TP3-220	22.0	23.99	1.1	0.78	0.3700
*TP3-330	33.0	35.08	0.96	0.64	0.4433
*TP3-470	47.0	47.71	0.90	0.55	0.5122

Notes:


- (1) Open Circuit Inductance Test Parameters: 100 KHz, 0.250 Vrms, 0.0 Adc.
- (2) RMS current for an approximate ΔT of 40°C. at an ambient temperature of 85°C.
- (3) Peak current for approximately 30% rolloff.
- (4) Values @ 20°C.

*BOLD are available from stock


Coiltronics Incorporated reserves the right to change component specifications without notice.

MECHANICAL DIAGRAM


TOP VIEW




SIDE VIEW



PCB PAD LAYOUT




CONNECTION DIAGRAM




PACKAGING INFORMATION


Parts are packaged on 13" reels. 1500 parts per reel.

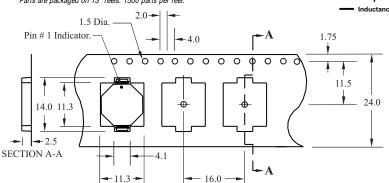






TP3-100



TP3-470

Typical Inductance & Energy vs Saturation Current

Inductance = = Energy



Amperes (Peak)



Direction of feed -



THIN-PAC 4 FAMILY TABLE

Part Number	Inductance μΗ (rated)	OCL ⁽¹⁾ μΗ +/-20%	I _{RMS} ⁽²⁾ Amperes	I _{SAT} ⁽³⁾ Amperes	DCR ⁽⁴⁾ Ohms max.
TP4-R47	0.47	0.507	2.8	6.3	0.0411
*TP4-1R0	1.0	1.09	2.4	4.4	0.0536
TP4-1R5	1.5	1.85	2.2	3.4	0.0641
*TP4-2R2	2.2	2.22	2.1	3.2	0.0715
TP4-3R3	3.3	3.21	2.0	2.7	0.0802
*TP4-4R7	4.7	5.05	1.8	2.2	0.1037
TP4-6R8	6.8	6.54	1.7	1.9	0.1168
*TP4-100	10.0	10.14	1.5	1.6	0.1458
*TP4-150	15.0	14.49	1.4	1.3	0.1727
*TP4-220	22.0	21.33	1.0	1.1	0.3068
*TP4-330	33.0	32.74	0.80	0.87	0.4922
*TP4-470	47.0	47.42	0.59	0.72	0.9080

Notes:


- (1) Open Circuit Inductance Test Parameters: 100 KHz, 0.250 Vrms, 0.0 Adc.
- (2) RMS current for an approximate ΔT of 40°C. at an ambient temperature of 85°C.
- (3) Peak current for approximately 30% rolloff.
- (4) Values @ 20°C.

*BOLD are available from stock


Coiltronics Incorporated reserves the right to change component specifications without notice.

MECHANICAL DIAGRAM


TOP VIEW




SIDE VIEW



PCB PAD LAYOUT




CONNECTION DIAGRAM




PACKAGING INFORMATION


Parts are packaged on 13" reels. 1500 parts per reel.

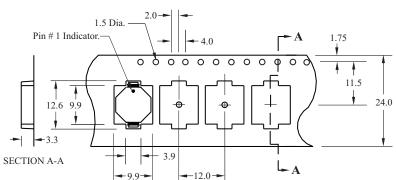

TP4-1R0




TP4-100



TP4-470

Typical Inductance & Energy vs Saturation Current



Inductance = = Energy



ACTUAL SIZE THIN PAC 4

Direction of feed



ENVIRONMENTAL SPECIFICATIONS

- Storage Temperature Range: -40°C to +125°C.
- Operating Ambient Temperature Range: -40°C to +85°C
 Range is application specific
- Infrared Reflow Temperature: +240°C for 30 seconds maximum
- Meets UL 94V-O Flammability Standard

DESIGN KITS AVAILABLE

To assist in prototyping, Coiltronics offers low-cost Design Kits for the THIN-PAC product family. Each Kit contains an assortment of inductance values complete with specifications. Coiltronics Design Kits can save hours (even days) of searching for parts and waiting on samples.

• Order Part Number TPK01-13692



Information furnished herein by Coiltronics Incorporated is believed to be accurate and reliable. However, Coiltronics Incorporated cannot assume responsibility for the use of any of our components, nor for any liabilities which may result from component use. Coiltronics Incorporated reserves the right to change component specifications without notice.

Life Support Policy: Coiltronics Incorporated does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of Coiltronics Incorporated. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

©1997 Coiltronics Incorporated. All rights reserved.



