

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







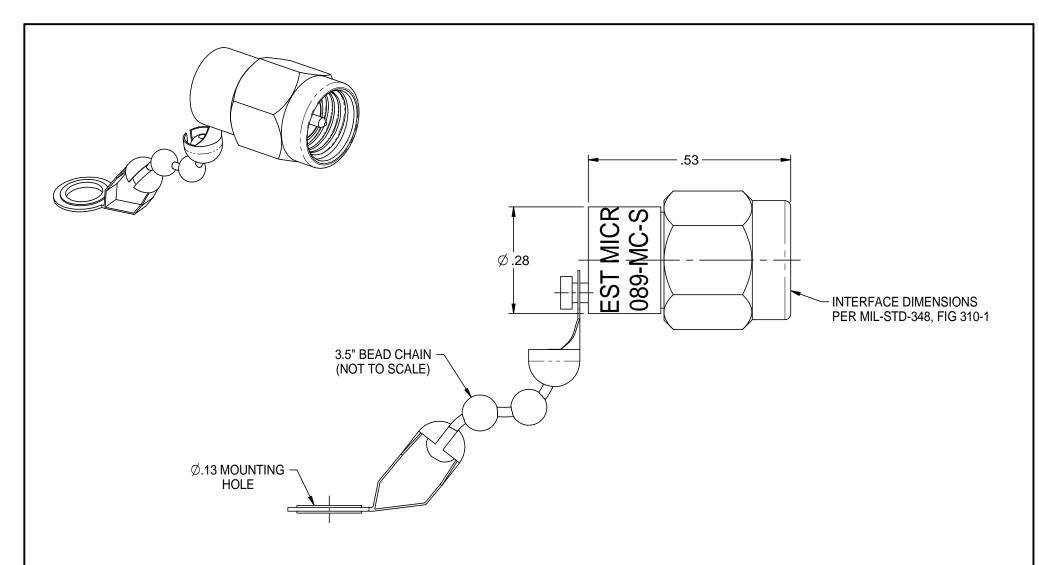

NOTES: UNLESS OTHERWISE SPECIFIED.

## 1. SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC - 26.5 GHz

1.2 VSWR (MAX):

DC - 4.0 GHz: 1.05:1

4.0 - 12.0 GHz: 1.10:1

12.0 - 18.0 GHz: 1.14:1

18.0 - 26.5 GHz: 1.30:1

1.3 MAXIMUM INPUT POWER:

2 WATTS MAX AT 25°C DERATED LINEARLY TO 1 WATT AT 125°C.

1.4 IMPEDANCE: 50 OHMS NOMINAL

1.5 TEMPERATURE RANGE: -65°C TO 125°C

1.6 WEIGHT: .12 OZ (3.4 GRAMS) MAX.

1.7 FINISH: PASIVATED STAINLÉSS STEEL.

EMERSON. Network Power Connectivity Solutions This PROPRIETARY Document Power Connectivity Solutions This proper Connectivity Solutions The control of the C	3RD ANGLE PROJECTION	Midwest Microwave			
	RoHS 2002/95/EC	Title: TERMINATION			
	UNLESS OTHERWISE SPECIFIED UNITS: INCH  .XX ±.02  .XXX ±.005  ANGLES ±2°	Model No. TRM-2089-MC-SMA-02			
		Size	DO NOT SCALE DRAWING	Date: 5/15/2013	Sheet 1 of 1