

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








# **iZIF™ HEAT FRAME**

### **GENERAL DESCRIPTION**

The iZIF™ is a custom aluminum heat frame that integrates the PCB retainer for improved structural integrity and thermal efficiency (.8°C-in./W). The iZIF™ is a highly reliable patent-pending design for rugged military and aerospace circuit card applications. It features a quarter-turn lock, uniform clamping pressure, and can be sized to fit small daughter cards up to 9U VME. A bottom plate may also be added for additional cooling and structural integrity. The iZIF™ features a 1/8" stainless steel socket head cap rod with beryllium copper spring. A variety of finishes are available such as chemical film, black anodize, and electroless nickel.

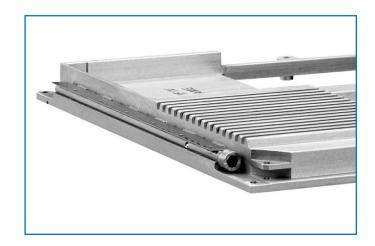

# THERMAL LINKS


### **GENERAL DESCRIPTION**


CTS's thermal links provide superior retention because of the 6 to 8-segment fingers versus the 2 or 3-segment fingers available from other manufacturers. These thermal links are offered for TO-5s, TO-8s and TO-18s with or without BeO washer and other appropriate hardware.

They provide an effective retainer and efficient thermal path between semiconductor and heat sinks or chassis.

There is excellent transistor retention under high vibration and shock loads. The thermal links can be inserted and removed multiple times without loss of retention or damage to the finish over the entire JEDEC case diameter range. They can be installed with a rivet or eyelet, soldered to a PC pad or heat sink, mounted with a single screw or with a threaded stud and hex nut.

# **FAN TOP SERIES**





**Fan Tops** 

"A"	"B"	Semiconductor		Part Number			
Dim.	Dim.	Case Type	*Ø °C/W	Unplated	Black Cadmium	Black Chem.	Material
.25	.50	TO-18	150.0	TXBF-019-025U	TXBF-019-025B	N.A.	BeCu
.25	.50	TO-18	150.0	TXCF-019-025U	N.A.	TXCF-019-025CB	Brass
.25	.75	TO-5	81.1	TXBF-032-025U	TXBF-032-025B	N.A.	BeCu
.25	.75	TO-5	81.1	TXCF-032-025U	N.A.	TXCF-032-025CB	Brass
.36	1.25	TO-5	57.7	TXBF2-032-036U	TXBF2-032-036B	N.A.	Brass Fan
.33	1.25	TO-8	41.0	TXBF2-050-033U	TXBF2-050-033B	N.A.	BeCu Retainer Brass Fan BeCu Retainer
.12	1.25	TO-5	56.6	TXCF-125-1U	TXCF-125-1CB	N.A.	Brass
.12	1.25	TO-8	56.6	TXCF-125-2U	TXCF-125-2B	N.A.	Brass

<sup>\*</sup>Natural convection, case-ambient mounted on G10 board




# THERMAL LINKS FOR TO-5, TO-8 AND TO-18 TRANSISTORS


# Fig.8 TXBE-032-031 TXB2P-032-037 TXB2P-032-025 TXB2P-032-025


# **Thermal Link Retainers Without BeO Insulators**

Fig.	Semiconductor	Part Nur	Mounting	
#	Case Type	Black Cadmium Finish	Dull Nickel Finish	Method
1	TO-18	TXBE-019-021B	TXBE-019-021ND	Rivet/Solder
2	TO-18	TXB2P-019-028B	TXB2P-019-028ND	2-56 Screw
3	TO-18	TX1807B	TX1807ND	4-40 Stud
3	TO-18	TX1807-1B	TX1807-1ND	6-32 Stud
4	TO-18	TX1847B	TX1847ND	2-56 Hex Nut
5	TO-5	TXBE-032-031B	TXBE-032-031ND	Rivet/Solder
6	TO-5	TXB2P-032-037B	TXB2P-032-037ND	4-40 Screw
7	TO-5	TX0507-1B	TX0507-1ND	6-32 Stud
7	TO-5	TX0507-2B	TX0507-2ND	10-32 Stud
8	TO-5	TX0547B	TX0547ND	14-40 Hex Nut



Dimensions are for reference use only. Contact CTS for dimensions with tolerances or standard part drawings.






# **Thermal Link Retainers With BeO Insulators**

_							
F	ig.	Semiconductor	Part Nur	Mounting			
	#	Case Type	Black Cadmium Finish	Dull Nickel Finish	Method		
	1	TO-18	TXP1803B	TXP1803ND	2-56 Screw		
	1	TO-18**	TXP1808B	TXP1808ND	2-56 Screw		
	2	TO-18	TX1806B	TX1806ND	4-40 Stud		
	2	TO-18	TX1806-1B	TX1806-1ND	6-32 Stud		
	3	TO-18	TX1822B	TX1822ND	2-56 Hex Nut		
	4	TO-18	_	TX1805-ND	Solder		
	5	TO-5	TXP0503B	TXP0503ND	4-40 Screw		
	5	TO-5**	TXP0508B	TXP0508ND	4-40 Screw		
	6	TO-5	TX0506-1B	TX0506-1ND	6-32 Stud		
	6	TO-5	TX0506-2B	TX0506-2ND	10-32 Stud		
	7	TO-5	TX0522B	TX0522ND	4-40 Hex Nut		
	8	TO-5	_	TX0505-ND	Solder		


<sup>\*\*</sup>BeO and thermal link are brazed together.



Dimensions are for reference use only. Contact CTS for dimensions with tolerances or standard part drawings.

# **THERMAL LINKS FOR TO-8s**





Dimensions are for reference use only. Contact CTS for dimensions with tolerances or standard part drawings.

# **Thermal Link Retainers Without BeO Insulators**

Part Nun Black Cadmium Finish		Mounting Method	Max. Weight (Grams)	Case Diameter
TXBE-045-028B	TXBE-045-028ND	Solder, Epoxy, Rivet	1.5	0.455
TXB2P-045-037B TXBE-050-028B TXB2P-050-037B	TXB2P-045-037ND TXBE-050-028ND TXB2P-050-037ND	4-40 Screw Solder, Epoxy, Rivet 4-40 Screw	4.5 1.5 4.5	0.455 0.500 0.500
TXBE-055-028B TXB2P-055-037B	TXBE-055-028ND TXB2P-055-037ND	Solder, Epoxy, Rivet 4-40 Screw	1.5 4.5	0.550 0.550 0.550

Screw and shouldered nylon washer for .060 chassis included; If mounting hardware not desired, deleted "P" from part number.

