# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# CEL

## NEC's 1.0 GHz BANDWIDTH SILICON MMIC AMPLIFIER

### **UPC1688G**

#### FEATURES

- FLAT GAIN:  $\Delta GP = \pm 1 \text{ dB TYP}$  from 100 to 700 MHz
- 1000 MHz FREQUENCY RESPONSE AT 3 dB DOWN
- 21 dB POWER GAIN AT 500 MHz
- SINGLE 5 VOLT SUPPLY
- NO EXTERNAL BIAS COMPONENTS REQUIRED
- LOW COST PACKAGE
- 50 Ω GAIN BLOCK
- AVAILABLE IN TAPE AND REEL

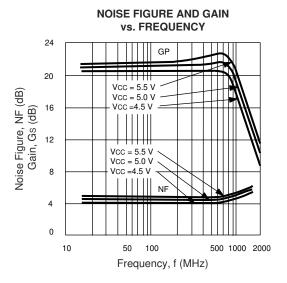

#### DESCRIPTION

NEC's UPC1688G is a silicon monolithic integrated circuit specifically designed as a flat gain, wide band amplifier covering the HF through the UHF band. It is particularly suited for low cost high performance amplifier applications.

NEC's stringent quality assurance and test procedures ensure the highest reliability and performance.

PART NUMBER PACKAGE OUTLINE			UPC1688G 39			
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	ТҮР	MAX	
lcc	Circuit Current	mA	14	19	24	
Gp	Power Gain	dB	18	21	23	
PSAT	Saturated Output Power, PIN = -5 dBm	dBm	2	4		
NF	Noise Figure	dB		4	5.5	
BW	Bandwidth at 3 dB down below the gain at 100 MHz	MHz	900	1100		
ISOL	Isolation	dB	23	27		
RLIN	Input Return Loss	dB	10	13		
RLOUT	Output Return Loss	dB	10	13		

#### **ELECTRICAL CHARACTERISTICS** (TA = 25°C, Vcc = 5 V, f = 500 MHz, Zs = ZL = 50 $\Omega$ )

#### ABSOLUTE MAXIMUM RATINGS<sup>1</sup> (TA = 25°C)


SYMBOLS	PARAMETERS	UNITS	RATINGS	
Vcc	Supply Voltage	V	6	
Pin	Input Power	dBm	+10	
Рт	Total Power Dissipation <sup>2</sup>	mW	200	
Тор	TOP Operating Temperature		-40 to +85	
Tstg	Storage Temperature	°C	-55 to +150	

#### Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.

2. At TA = +85°C.

#### EQUIVALENT CIRCUIT

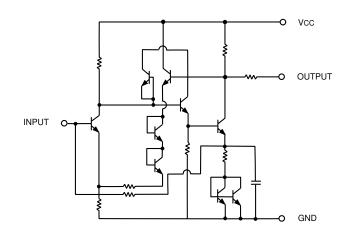


#### **TYPICAL PERFORMANCE CURVES** (TA = 25°C)

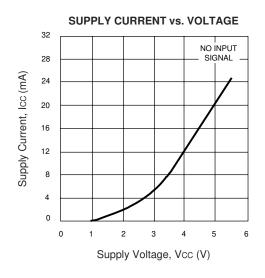

**GAIN vs. FREQUENCY** AND TEMPERATURE 24 20 TA = -55° C TA = -20° C TA = +25° C 16 Gain, Gs (dB) TA = +85° C TA = +125° C 12 8 4 0 10 50 100 500 1000 2000 Frequency, f (MHz)


SUPPLY CURRENT vs. **TEMPERATURE** 32 VCC = 5 V28 Supply Current, Icc (mA) 24 20 16 12 8 4 0 -60 -30 0 30 60 90 120 150 Temperature, TA (°C)

OUTPUT RETURN LOSS vs. FREQUENCY AND VOLTAGE

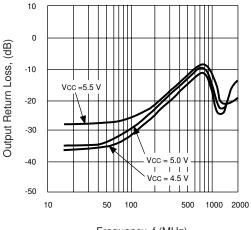



Frequency, f (MHz)


#### TYPICAL PERFORMANCE CURVES (TA = 25°C)

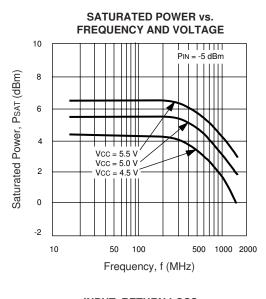




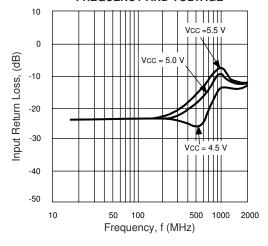




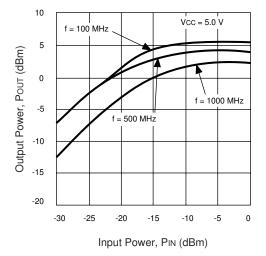

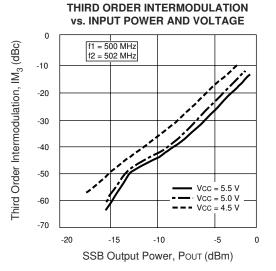

**ISOLATION vs. FREQUENCY** 

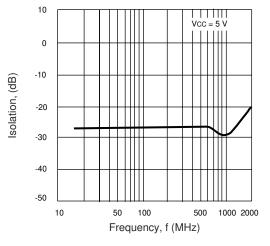


#### TYPICAL SCATTERING PARAMETERS (TA = 25°C)

#### UPC1688G:

Vcc =5.0 V, Icc =19 mA

FREQUENCY	s	511	5	<b>S</b> 21	S	12	S	22	k	<b>S</b> 21
GHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG		dB
0.10	0.102	-85.7	11.040	-13.7	0.042	3.2	0.073	-132.3	1.30	20.9
0.20	0.161	-102.3	11.632	-31.0	0.043	-0.3	0.089	-148.8	1.23	21.3
0.30	0.237	-110.4	12.054	-48.4	0.044	-1.1	0.100	-156.0	1.17	21.6
0.40	0.292	-116.9	12.328	-62.8	0.046	-1.0	0.111	174.0	1.10	21.8
0.50	0.344	-123.9	12.515	-80.8	0.048	8.4	0.136	108.1	1.00	21.9
0.60	0.353	-135.4	12.578	-102.2	0.050	2.2	0.153	47.3	0.94	22.0
0.70	0.348	-152.8	12.466	-124.5	0.053	-1.7	0.172	-16.6	0.93	21.9
0.80	0.301	-165.8	11.899	-148.8	0.055	-7.6	0.192	-37.5	0.96	21.5
0.90	0.217	-175.0	10.564	-172.3	0.057	-11.6	0.222	-60.5	1.02	20.5
1.00	0.113	-169.8	8.983	166.8	0.056	-15.9	0.270	-75.8	1.14	19.1
1.10	0.081	-116.2	7.466	147.5	0.056	-18.3	0.318	-90.6	1.25	17.5
1.20	0.139	-87.2	6.170	130.7	0.053	-19.6	0.350	-102.4	1.45	15.8
1.30	0.219	-82.3	5.177	117.2	0.053	-19.6	0.374	-112.9	1.60	14.3
1.40	0.278	-83.6	4.330	104.5	0.053	-23.2	0.385	-121.6	1.80	12.7
1.50	0.327	-86.8	3.684	93.2	0.054	-24.4	0.390	-129.1	1.97	11.3
1.60	0.366	-89.6	3.161	82.5	0.055	-24.2	0.387	-135.1	2.17	10.0
1.70	0.399	-91.6	2.742	73.3	0.055	-27.2	0.380	-141.0	2.44	8.8
1.80	0.436	-94.8	2.423	64.1	0.056	-28.3	0.371	-145.9	2.62	7.7
1.90	0.452	-96.7	2.178	56.3	0.057	-29.0	0.352	-149.8	2.86	6.8
2.00	0.465	-99.0	1.991	47.7	0.058	-30.4	0.339	-153.0	3.06	6.0
2.10	0.486	-99.3	1.814	39.4	0.059	-28.4	0.319	-155.3	3.27	5.2

#### OUTLINE DIMENSIONS (Units in mm)

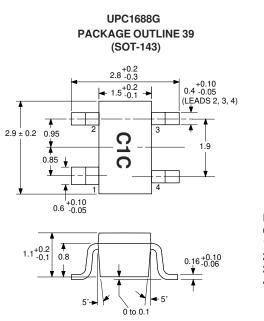

PIN CONFIGURATIONS 1. GND 2. OUTPUT 3. Vcc 4. INPUT

#### Note:

All dimensions are typical unless otherwise specified.

#### Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices. 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com DATA SUBJECT TO CHANGE WITHOUT NOTICE

#### **ORDERING INFORMATION**

PART NUMBER		QTY			
UPC	1688G-TI	3000/REEL			