imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





BIPOLAR ANALOG INTEGRATED CIRCUIT UPC8151TB

SILICON RFIC LOW CURRENT AMPLIFIER FOR CELLULAR/CORDLESS TELEPHONES

FEATURES


- SUPPLY VOLTAGE: Vcc = 2.4 to 3.3 V
- LOW CURRENT CONSUMPTION: UPC8151TB; lcc = 4.2 mA TYP @ 3.0 V
- HIGH EFFICIENCY: UPC8151TB; P1dB = +2.5 dBm TYP @ f = 1 GHz
- **POWER GAIN:** UPC8151TB; GP = 12.5 dB TYP @ f = 1 GHz
- OPERATING FREQUENCY:
 100 MHz to 1900 MHz (Output port LC matching)
- EXCELLENT ISOLATION: UPC8151TB; ISOL = 38 dB TYP @ f = 1 GHz
- HIGH DENSITY SURFACE MOUNTING: 6 pin super minimold or SOT-363 package

DESCRIPTION

The UPC8151TB is a silicon RFIC designed as a buffer amplifier for cellular or cordless telephones. This low current amplifier operates on 3.0 V and is housed in a 6 pin super minimold package.

The IC is manufactured using the 20 GHz f⊤ NESAT[™] III silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials protect the chip surface from external pollution and prevent corrosion/ migration. Thus, this IC has excellent performance, uniformity and reliability.

INSERTION POWER GAIN vs. FREQUENCY AND VOLTAGE

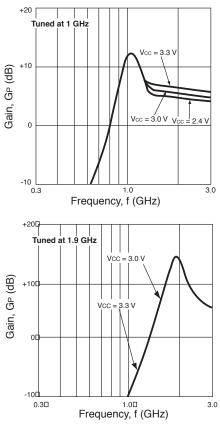

ELECTRICAL CHARACTERISTICS (TA = 25 °C, Vcc = Vout = 3.0 V, ZL = Zs = 50 Ω, at LC matched frequency)

	PAR PACKA		UPC8151TB SO6			
SYMBOLS	PARAMETER	S AND CONDITIONS	UNITS	MIN	ТҮР	МАХ
lcc	Circuit Current, No sig	mA	2.8	4.2	5.8	
Gp	Power Gain	f = 1.00 GHz f = 1.90 GHz	dB	9.5 12.0	12.5 15.0	14.5 17.0
ISOL	Isolation	f = 1.00 GHz f = 1.90 GHz	dB	33.0 29.0	38.0 34.0	
P1dB	Output Power at 1 dB	Compression Point f = 1.00 GHz f = 1.90 GHz	dBm	-1.0 -3.0	+2.5 +0.5	-
NF	Noise Figure	f = 1.00 GHz f = 1.90 GHz	dB		6.0 6.0	7.5 7.5
RLin	Input Return Loss(with	nout matching circuit) f = 1.00 GHz f = 1.90 GHz	dB	2.0 1.0	5.0 4.0	
RLout	Output Return Loss (v	vith external matching circuit) f = 1.00 GHz f = 1.90 GHz	dB		10.0 12.0	
IМз		tion Distortion .001 GHz, PO(each) = -20 dBm .901 GHz, PO(each) = -20 dBm	dBc		-62.0 54.0	

ABSOLUTE MAXIMUM RATINGS¹ (TA = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
Vcc	Supply Voltage	V	3.6
PD	Total Power Dissipation ²	mW	200
TA	Operating Temperature	°C	-40 to +85
Тѕтс	Storage Temperature	°C	-55 to +150

Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.

2. Mounted on a 50 x 50 x 1.6 mm epoxy glass PWB (TA = 85° C).

RECOMMENDED OPERATING CONDITIONS


SYMBOLS	PARAMETERS	UNITS	MIN	ТҮР	MAX
Vcc	Supply Voltage	V	2.4	3.0	3.3
TA	Operating Temperature	°C	-40	+25	+85
f	Operating Frequency	MHz	100		1900

PIN FUNCTIONS

Pin No.	Symbol	Applied Voltage	Description	Internal Equivalent Circuit
1	INPUT		Signal input pin. An internal matching circuit provides a 50 Ω match over a wide bandwidth. This pin must be coupled to signal source with a blocking capacitor.	
4	OUTPUT	Vcc through external inductor.	Signal output pin. This output is designed as an open collector. Due to the high impedance output this pin should be externally equipped with an LC matching circuit.	
6	Vcc	2.4 to 3.3	Power supply pin. This pin should be externally equipped with a bypass capacitor to minimize ground impedance.	
2 3 5	GND	0	Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to minimize impedance difference.	

TYPICAL APPLICATION EXAMPLE


Location Examples in Digital Cellular

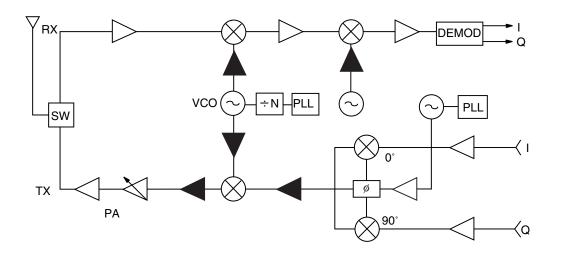


PRODUCT LINE-UP (TA = +25 °C, Vcc = 3.0 V, ZL = Zs = 50Ω)

PARAMETER	OUT	JTPUT PORT MATCHING FREQUENCY						
PART NO.	lcc	lcc 1 GHz 1.9 GHz			PACKAGES			
	(mA)	G₽ (dB)	ISOL (dB)	P _{1dB} (dBm)	G₽ (dB)	ISOL (dB)	P _{1dB} (dBm)	
UPC8128TB	2.8	12.5	39	-4.0	13.0	37	-4.0	6 pin super minimold
UPC8151TB	4.5	12.5	38	+2.5	15.0	34	+0.5	6 pin super minimold
UPC8152TB	5.6	23.0	40	-4.5	17.5	35	-8.5	6 pin super minimold


TYPICAL PERFORMANCE CURVES (TA = 25°C unless otherwise specified)




CIRCUIT CURRENT vs. TEMPERATURE




1.0 GHz OUTPUT PORT MATCHING






INPUT RETURN LOSS vs. FREQUENCY AND VOLTAGE




INSERTION POWER GAIN vs. FREQUENCY AND TEMPERATURE +20 Vcc = 3.0 V TA = +85°C +10 0 +25°C $T_A = -40^{\circ}C$ Gain, GP (dB) -10 -20 -30 -40 -50 3.0 0.1 0.3 1.0 Frequency, f (GHz)


ISOLATION vs. FREQUENCY AND TEMPERATURE





INPUT RETURN LOSS vs. FREQUENCY AND TEMPERATURE





1.0 GHz OUTPUT PORT MATCHING














OUTPUT POWER vs. INPUT POWER AND TEMPERATURE




3rd ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE AND VOLTAGE




1.0 GHz Output Port Matching



1.9 GHz Output Port Matching



INPUT RETURN LOSS vs. FREQUENCY AND VOLTAGE



(P) OS vcc = 3.0 V -600 Vcc = 3.0 V


OUTPUT RETURN LOSS vs. FREQUENCY AND VOLTAGE

Frequency, f (GHz)


1.00


3.0

0.3□




1.9 GHz Output Port Matching







3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE AND VOLTAGE 3rd Order Intermodulation Distortion, IM3 (dBc) 60 50 40 Vcc = 3.3 V 30 VCC = 3.0 V 20 VCC = 2.4 V 10 0 -25 -20 -15 -10 -5 0 +5 Output Power of Each Tone, PO (each) (dBm)

NOISE FIGURE vs. VOLTAGE



TYPICAL SCATTERING PARAMETERS (TA = 25°C)





S22-Frequency

Vcc = Vout = 3.0 V, Icc = 4.2 mA -

FREQUENCY	5	511	9	S 21	S	512	S	22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100	.843	-16.0	1.202	-178.9	.000	69.5	.996	-3.3	
200	.752	-27.1	1.197	-177.5	.003	120.2	1.009	-6.9	
300	.666	-32.4	1.221	-175.4	.003	103.2	.998	-9.9	
400	.603	-36.8	1.299	-174.5	.004	92.8	.986	-13.8	
500	.555	-40.5	1.398	-174.0	.005	88.8	.968	-17.3	
600	.528	-44.8	1.513	-174.9	.005	95.2	.968	-20.4	
700	.517	-49.9	1.691	-176.2	.007	67.5	.971	-23.1	
800	.525	-54.4	1.815	-178.2	.007	72.4	.972	-25.8	
900	.545	-58.9	2.008	179.5	.006	84.5	.960	-29.3	
1000	.571	-62.8	2.189	175.7	.009	78.3	.936	-32.8	
1100	.580	-67.3	2.399	171.2	.007	60.0	.926	-36.3	
1200	.588	-71.3	2.560	165.9	.007	89.5	.933	-39.5	
1300	.571	-76.4	2.736	157.5	.008	67.2	.941	-42.0	
1400	.563	-82.3	2.865	151.3	.008	79.6	.930	-45.0	
1500	.553	-88.8	2.946	143.3	.006	79.9	.906	-48.1	
1600	.552	-95.2	3.077	137.0	.006	91.4	.895	-51.5	
1700	.551	-101.5	3.083	130.1	.009	102.3	.888	-54.8	
1800	.550	-107.5	3.174	123.9	.009	100.5	.884	-57.3	
1900	.536	-113.3	3.164	117.4	.006	109.5	.885	-60.5	
2000	.517	-119.8	3.193	110.7	.009	115.9	.881	-63.4	
2100	.495	-127.1	3.149	104.4	.010	124.2	.870	-66.6	
2200	.484	-135.3	3.143	97.3	.011	122.4	.867	-69.8	
2300	.484	-142.6	3.135	90.5	.012	131.7	.866	-72.3	
2400	.490	-148.5	3.120	83.5	.015	138.1	.868	-75.5	
2500	.499	-152.5	3.053	78.4	.016	136.3	.866	-78.7	
2600	.499	-155.8	2.991	71.4	.018	142.9	.864	-82.5	
2700	.485	-157.4	2.958	68.0	.018	143.9	.858	-86.6	
2800	.464	-160.6	2.810	62.9	.021	142.5	.852	-89.7	
2900	.439	-164.1	2.866	57.5	.022	149.3	.872	-93.4	
3000	.416	-168.6	2.713	54.5	.025	148.4	.864	-96.6	
3100	.403	-173.6	2.635	48.0	.030	143.6	.867	-101.0	

3

2


1

Ο

(Bottom View)

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE SO6




ORDERING INFORMATION

PART NUMBER	QUANTITY	MARKING
UPC8151TB-E3-A	3K/Reel	C2U

Note:

Embossed tape, 8 mm wide. Pins 1, 2 and 3 face perforated side of tape.

TEST CIRCUIT



FOUR	L1	C1	
900 MHz	12 nH	0.68 pF	All Other
1900 MHz	2.7 nH	0.47 pF	Caps = 1000 pF

4. OUTPUT 5. GND

3

2

1

6. Vcc

1. INPUT 2. GND 3. GND

LEAD CONNECTIONS

(Top View)

4


5

6

4

5

6



DATA SUBJECT TO CHANGE WITHOUT NOTICE