imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SILICON RFIC LOW CURRENT AMPLIFIER FOR MOBILE COMMUNICATIONS

FEATURES

- LOW CURRENT CONSUMPTION Icc = 1.9 mA TYP @ Vcc = 3.0 V
- SUPPLY VOLTAGE: Vcc = 2.4 to 3.3 V

- EXCELLENT ISOLATION: ISOL = 39 dB TYP @ f = 1.0 GHz ISOL = 40 dB TYP @ f = 1.9 GHz ISOL = 38 dB TYP @ f = 2.4 GHz
- POWER GAIN:
 GP = 11.0 dB TYP @ f = 1.0 GHz
 GP = 11.5 dB TYP @ f = 1.9 GHz
 GP = 11.5 dB TYP @ f = 2.4 GHz
- OPERATING FREQUENCY:
 0.1 to 2.4 GHz (Output port LC matching)
- 1 dB GAIN COMPRESSION OUTPUT POWER: PO(1 dB) = -4.0 dBm TYP @ f = 1.0 GHz PO(1 dB) = -7.0 dBm TYP @ f = 1.9 GHz PO(1 dB) = -7.5 dBm TYP @ f = 2.4 GHz
- HIGH-DENSITY SURFACE MOUNTING: 6-pin super minimold package (2.0 x 1.25 x 0.9 mm)
- LOW WEIGHT: 7 mg (Standard Value)

APPLICATIONS

 Buffer Amplifiers on 0.1 to 2.4 GHz mobile communications system


ELECTRICAL CHARACTERISTICS

 $(T_A = 25^{\circ}C, V_{CC} = V_{OUT} = 3.0 V, Z_S = Z_L = 50 \Omega, at LC matched frequency unless otherwise specified))$

PART NUMBER PACKAGE OUTLINE						UPC8178TB S06		
SYMBOLS		PARAMETERS AND COM	NDITIONS ¹	UNITS	MIN	ТҮР	MAX	
lcc	Circuit Current (I	no signal)		mA	1.4	1.9	2.4	
GP		f = 1.0 GHz		dB	9.0	11.0	13.0	
	Power Gain	f = 1.9 GHz		dB	9.0	11.5	13.5	
		f = 2.4 GHz		dB	9.0	11.5	13.5	
ISOL		f = 1.0 GHz	f = 1.0 GHz f = 1.9 GHz		34	39	-	
Isolati	Isolation	f = 1.9 GHz			35	40	-	
		f = 2.4 GHz	f = 2.4 GHz		33	38	-	
PO(1dB)		'	f = 1.0 GHz	dBm	-8.0	-4.0	-	
	1 dB Gain Comp	ression Output Power	f = 1.9 GHz	dBm	-11.0	-7.0	-	
			f = 2.4 GHz	dBm	-11.5	-7.5	-	
NF		f = 1.0 GHz		dB	-	5.5	7.0	
	Noise Figure f = 1.9 GHz			dB	-	5.5	7.0	
		f = 2.4 GHz		dB	-	5.5	7.0	
RLin		f = 1.0 GHz		dB	4	7	-	
	Input Return Los	s f = 1.9 GHz		dB	5	8	-	
		f = 2.4 GHz		dB	6.5	9.5	-	

POWER GAIN vs. FREQUENCY

UPC8178TB



DESCRIPTION

The UPC8178TB is a silicon monolithic integrated circuit designed as an amplifier for mobile communications. This IC can realize low current consumption with an external chip inductor which cannot be realized on an internal 50 Ω wideband matched IC. This low current amplifier operates on 3.0 V. This device is manufactured using NEC's 30 GHz fmax UHS0 (Ultra High Speed Process) silicon bipolar process which uses direct silicon nitride passivation film and gold electrodes. These materials can protect the chip surface from pollution and prevent corrosion/migration. Thus, this IC has excellent performance, uniformity and reliability.

NEC's stringent quality assurance and test procedures ensure the highest reliability and performance.

California Eastern Laboratories

UPC8178TB

ABSOLUTE MAXIMUM RATINGS¹

(TA = +25 C unless otherwise specified)						
SYMBOLS	PARAMETERS	UNITS	RATINGS			
Vcc	Supply Voltage ²	V	3.6			
Icc	Circuit Current	mA	15			
PD	Power Dissipation ³	mW	270			
Та	Operating Ambient Temperature	°C	-40 to +85			
Тѕтс	Storage Temperature	°C	-55 to +150			
Pin	Input Power	dBm	+5			

Notes:

1. Operation in excess of any one of these conditions may result in permanent damage.

2. Pins 4 and 6.

 Mounted on a double-sided copper clad 50x50x1.6 mm epoxy glass PWB, TA = +85°C.

RECOMMENDED OPERATING CONDITIONS

SYMBOLS	PARAMETERS	UNITS	MIN	ТҮР	MAX
Vcc	Supply Voltage ¹	V	2.4	3.0	3.3
Та	Operating Ambient Temperature	°C	-40	+25	+85

Note:

1. Same voltage applied to pins 4 and 6.

Parameter				put port equency			tput port equency			put port equency		GHz outp hing fre	out port quency	Marking
	lcc	GΡ	ISOL	P O(1 dB)	GΡ	ISOL	PO(1 dB)	GΡ	ISOL	P O(1 dB)	GP	ISOL	P O(1 dB)	
Part No.	(m A)	(dB)	(dB)	(dBm)	(dB)	(dB)	(dBm)	(dB)	(dB)	(dBm)	(dB)	(dB)	(dBm)	
UPC8178TB	1.9	11	39	-4.0	-	_	-	11.5	40	-7.0	11.5	38	-7.5	C3B
UPC8179TB	4.0	13.5	44	+3.0	-	-	-	15.5	42	+1.5	15.5	41	+1.0	C3C
UPC8128TB	2.8	12.5	39	-4.0	13	39	-4.0	13	37	-4.0	-	-	_	C2P
UPC8151TB	4.2	12.5	38	+2.5	15	36	+1.5	15	34	+0.5	-	-	_	C2U
UPC8152TB	5.6	23	40	-4.5	19.5	38	-8.5	17.5	35	-8.5	-	_	_	C2V

SERIES PRODUCTS1 (TA = +25°C, VCC = Vout = 3.0 V, ZS = ZL = 50 Ω)


Note:

1. Typical performance.


PIN FUNCTIONS (Pin Voltage is measured at Vcc = 3.0 V)

Pin No.	Pin Name	Applied Voltage (V)	Pin Voltage (V)	Function and Applications	Internal Equivalent Circuit
1	Input	_	0.91	Signal input pin. An internal matching circuit, configured with resistors, enables a 50 Ω connection over a wide band. This pin must be coupled to the signal source with the capacitor for DC out.	(⁶)
2 3 5	GND	0	Η	Ground pin. This pin should be connected to the system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with a wide ground pattern to decrease impedance difference.	
4	Output	Voltage same as Vcc through external inductor	-	Signal output pin. This pin is designed as the collector output. Due to the high impedance output, this pin should be externally equipped with LC matching circuit to next stage. For L, a size 1005 chip inductor can be used.	
6	Vcc	2.4 to 3.3		Power supply pin. This pin should be externally equipped with a bypass capacitor to minimize it's impedance.	3 (1 (5

TEST CIRCUIT 1 (f = 1.0 GHz)

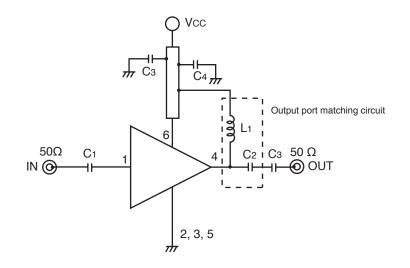


EXAMPLE OF TEST CIRCUIT 1 ASSEMBLED ON EVALUATION BOARD

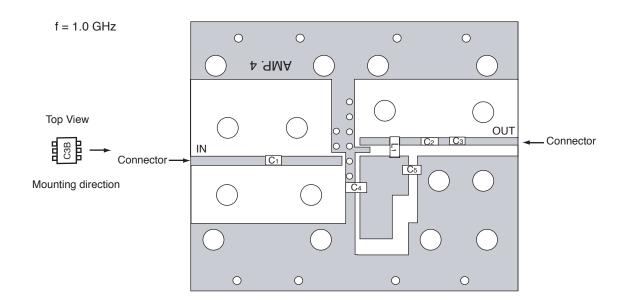


COMPONENT LIST

	1.0 GHz Output Port Matching
C1, C3, C5	1000 pF
C2	0.75 pF
C4	10 pF
L1	12 nH

TEST CIRCUIT 2 (f = 1.9 GHz)

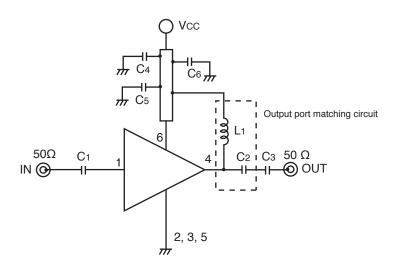


EXAMPLE OF TEST CIRCUIT 2 ASSEMBLED ON EVALUATION BOARD

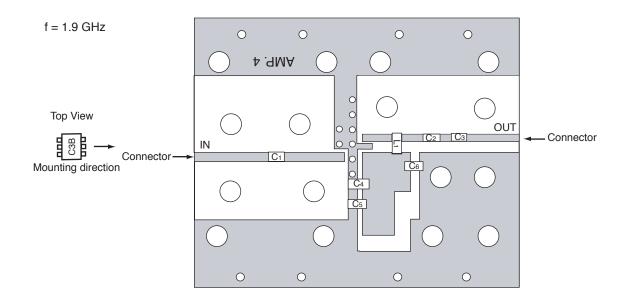


COMPONENT LIST

	1.9 GHz Output Port Matching
C1, C3, C5, C6	1000 pF
C2	0.5 pF
C4	10 pF
L1	3.9 nH

TEST CIRCUIT 3 (f = 2.4 GHz)

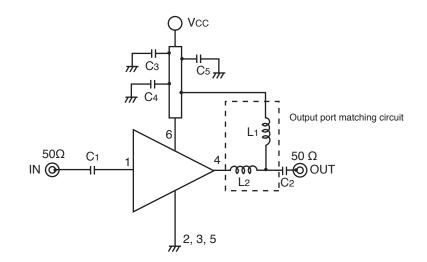

EXAMPLE OF TEST CIRCUIT 3 ASSEMBLED ON EVALUATION BOARD

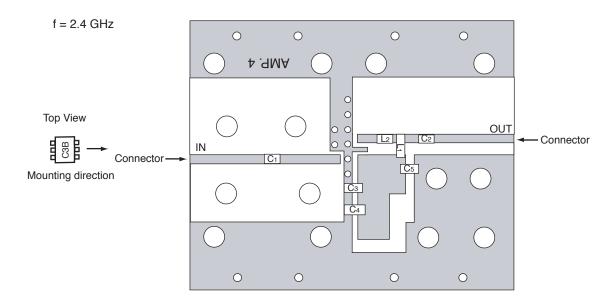

COMPONENT LIST

	2.4 GHz Output Port Matching
C1, C3, C4, C5	1000 pF
C3	10 pF
L1	1.8 nH
L2	2.7 nH

NOTES:

1. 42 x 35 x 0.4 mm double sided copper clad polyimide board.


2. Solder plated on pattern.

3. Back side: GND pattern.

4. \bigcirc () Through holes.

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE S06

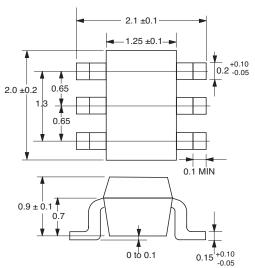

Note:

All dimensions are typical unless otherwise specified.

SYSTEM APPLICATION EXAMPLE

Location examples in digital cellular

LNA RX DEMOD PLL SW ÷N 0 ТΧ PA 90 **(**Q

ORDERING INFORMATION

Part Number	Quantity
UPC8178TB-E3-A	3 K pcs/reel


Life Support Applications

Note: Embossed tape, 8 mm wide. Pins 1, 2 and 3 face the tape

Life Support Applications perforation side. These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

EXCLUSIVE NORTH AMERICAN AGENT FOR NEC RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279 24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: http://WWW.CEL.COM

PIN CONNECTIONS

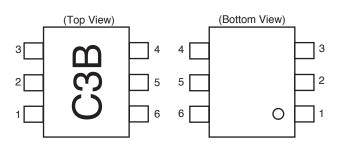

PIN NO.	PIN NAME
1	Input
2	GND
3	GND
4	Output
5	GND
6	Vcc



Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL's understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentratio in CEL		
Lead (Pb)	< 1000 PPM	-A -AZ Not Detected (*)		
Mercury	< 1000 PPM	Not Detected		
Cadmium	< 100 PPM	Not Detected		
Hexavalent Chromium	< 1000 PPM	Not Detected		
РВВ	< 1000 PPM	< 1000 PPM Not Detected		
PBDE	< 1000 PPM	Not Detected		

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

See CEL Terms and Conditions for additional clarification of warranties and liability.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerting the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.