# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# SERIES: VYB10W-T | DESCRIPTION: DC-DC CONVERTER

### FEATURES


- chassis mount with screw terminal connectors
- up to 10 W output
- compact size
- 4:1 input range (9 ~ 36 V, 18 ~ 72 V)
- single and dual outputs
- 1,500 V isolation
- short circuit protection
- wide temperature operation (-40 ~ 85°C)
- efficiency up to 83%



MODEL	input voltage	output voltage		put ent	output power	ripple <sup>1</sup>	noise1	efficiency
	range (Vdc)	(Vdc)	min (mA)	max (mA)	max (W)	max (mVp-p)	max (mVp-p)	typ (%)
VYB10W-Q24-S3-T <sup>2</sup>	9 ~ 36	3.3	240	2,400	8	50	150	76
VYB10W-Q24-S5-T	9 ~ 36	5	200	2,000	10	50	150	79
VYB10W-Q24-S12-T	9 ~ 36	12	83	833	10	50	150	81
VYB10W-Q24-S15-T	9 ~ 36	15	67	666	10	50	150	82
VYB10W-Q24-D5-T	9 ~ 36	±5	±100	±1,000	10	50	150	80
VYB10W-Q24-D12-T	9 ~ 36	±12	±42	±416	10	50	150	82
VYB10W-Q24-D15-T	9 ~ 36	±15	±33	±333	10	50	150	83
VYB10W-Q48-S3-T <sup>2</sup>	18 ~ 72	3.3	240	2,400	8	50	150	77
VYB10W-Q48-S5-T <sup>2</sup>	18 ~ 72	5	200	2,000	10	50	150	78
VYB10W-Q48-S12-T	18 ~ 72	12	83	833	10	50	150	82
VYB10W-Q48-S15-T	18 ~ 72	15	67	666	10	50	150	83
VYB10W-Q48-D5-T <sup>2</sup>	18 ~ 72	±5	±100	±1,000	10	50	150	78
VYB10W-Q48-D12-T	18 ~ 72	±12	±42	±416	10	50	150	82
VYB10W-Q48-D15-T	18 ~ 72	±15	±33	±333	10	50	150	83

Notes: 1. Ripple and noise are measured at 20 MHz BW with 10µF tantalum capacitor and 1µF ceramic capacitor across output 2. PWM mode, others PFM mode

# PART NUMBER KEY

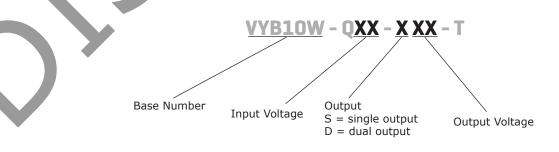


### **INPUT**

INPUI					
parameter	conditions/description	min	typ	max	units
operating input voltage		9	24	36	Vdc
		18	48	72	Vdc
OUTPUT					
parameter	conditions/description	min	typ	max	units
line regulation	measured from low line to high line		±0.2	±0.5	%
load regulation	measured from 10% to full load		±0.5	$\pm 1^{1}$	%
voltage accuracy	positive, refer to recommended circuit negative, refer to recommended circuit		±1 ±3	±3 ±5	% %
switching frequency	100% load, input voltage range		300		kHz
temperature coefficient				±0.03	%/°C
Notes: 1. Dual output models un	balanced load: ±5%				
PROTECTIONS					
parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, automatic recovery				
SAFETY AND COMP	LIANCE				
parameter	conditions/description	min	typ	max	units
isolation voltage	tested for 1 minute at 1 mA max.	1,500			Vdc
isolation resistance	at 500 Vdc	1,000			MΩ
isolation capacitance	input to output, 100 kHz / 1 V	•	1,000		pF
RoHS compliant	yes				
MTBF		1,000,000			hours
ENVIRONMENTAL					
parameter	conditions/description	min	typ	max	units


parameter	conditions/description	min typ	) max	units
operating temperature	see derating curve	-40	100	°C
storage temperature		-55	125	°C
storage humidity	non-condensing		95	%
temperature rise	100% load	40		°C

# **DERATING CURVES**



.....

### MECHANICAL

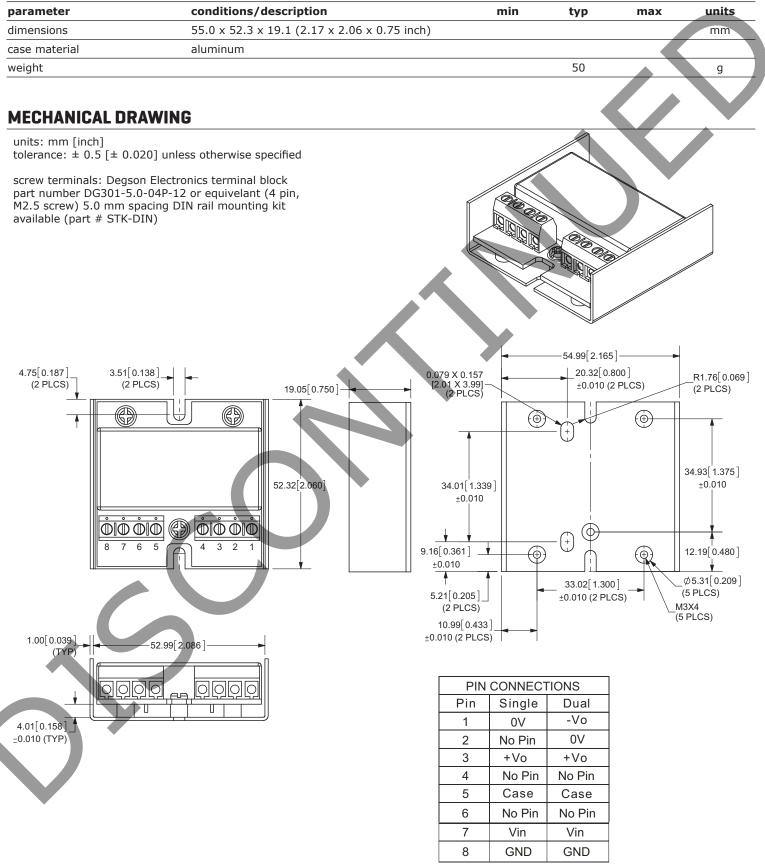


### **APPLICATION NOTES**

#### **Requirement on Output Load** 1.

In order to ensure the product operates efficiently and reliably, make sure the specified range of input voltage is not exceeded and the minimum output load is not less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading.

#### 2. **Recommended Circuit**

The VYB10W series has been tested according to the following recommended testing circuit. This series should be tested under load. (see Figure 1)




If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. If the capacitance is too big, a startup problem might arise. The maximum allowable capacitance to ensure safe and reliable operation is listed in Table 1.

General:

Cin: 10 ~ 47 µF		Single Vout (Vdc)	Cout (µF)	Dual Vout (Vdc)	Cout (µF)
Cout: 10 $\mu$ F / 100 mA		3.3	2,200		
	Table 1	5	1,000	±5	680
		12	470	±12	330
		15	330	±15	220

#### **Input Current** 3.

When using an unstable power source, please ensure the output voltage and ripple voltage do not excced indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current Ip.

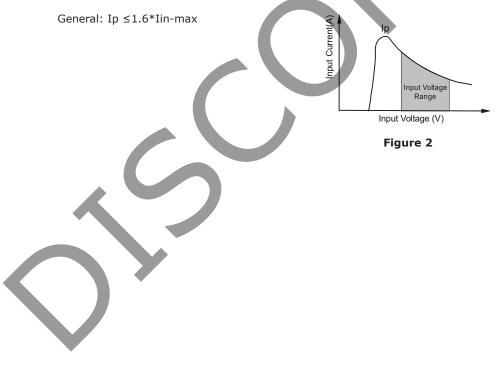

Notes: 1. Operation under minimum load will not damage the converter; however, they may not meet all specifications listed.

- 2. All specifications measured at: Ta=25°C, humidity<75%, nominal input voltage and rated output load, unless otherwise specified.
- 3. No parallel connection ..... .....

## **REVISION HISTORY**

rev.	description	date
1.0	initial release	08/08/2011
1.01	V-Infinity branding removed	08/29/2012
1.02	removed on/off control option, updated spec	04/05/2013

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

.....

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.