Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

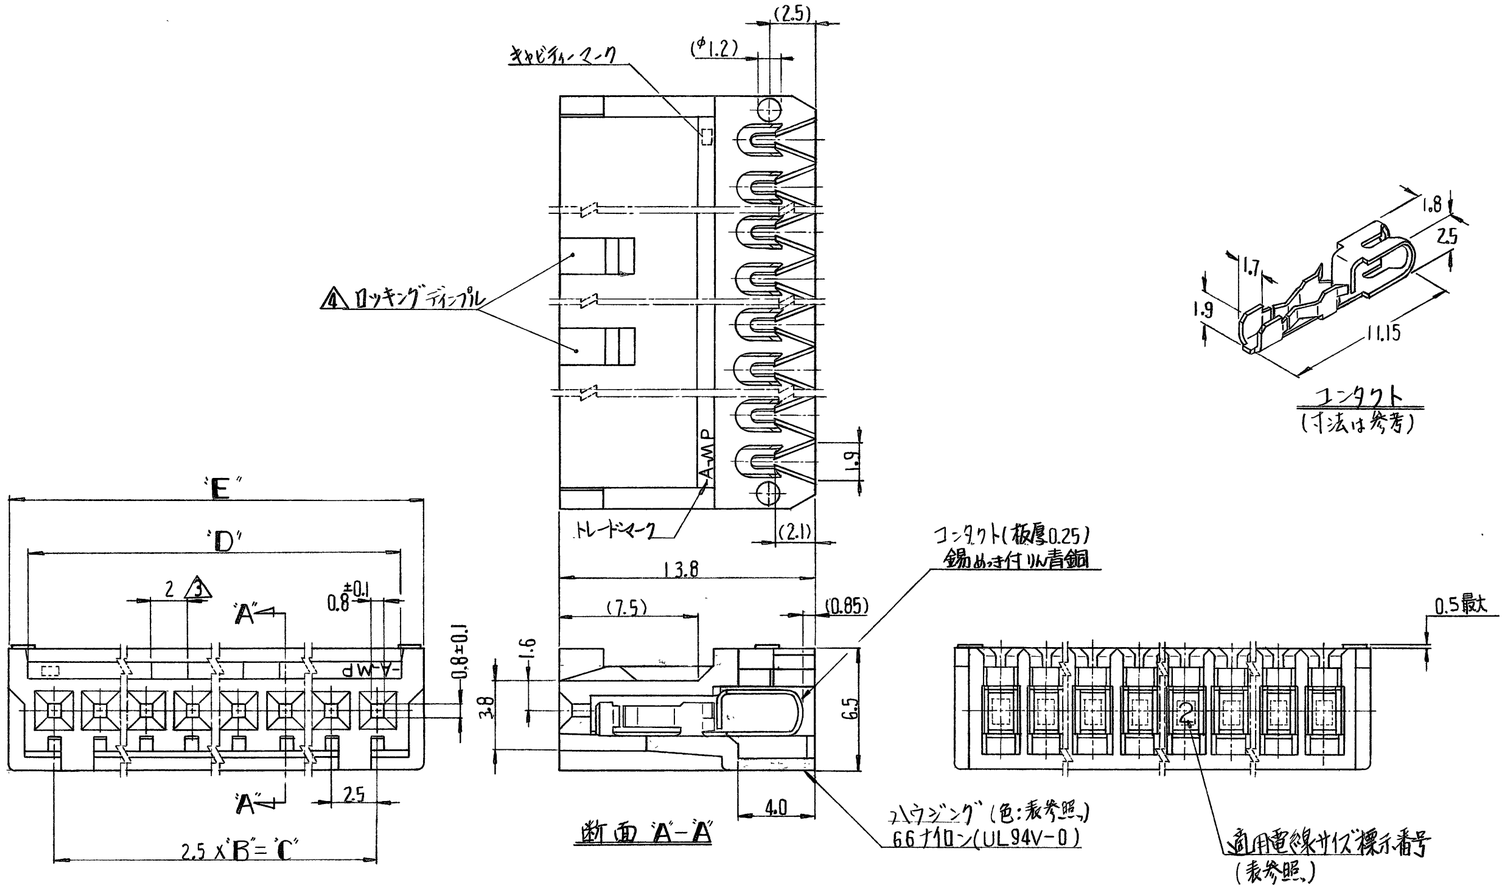

注;

1. 適用電線

サイズ (AWG)	断面積 mm²	被覆外径 材質	導体仕様
④ 22	0.3 ~ 0.35	φ1.1 ~ φ1.5 PVC被覆	錫コーティング撚線 単線(錫めっき付) 7本撚線(錫めっき付)
24	0.2 ~ 0.22	↓	
26	0.12 ~ 0.15	↓	
28	0.08 ~ 0.09	φ1.1 ~ φ1.5 PVC被覆	

2. 適用規格 { 製品仕様書番号 108-5130
取付適用仕様書番号 114-5046

③ 2極ハウジングのみ ディンプル巾 1.5

④ 2 ~ 12極 : シングル ディンプル
14 ~ 20極 : ダブル ディンプル

5. 嵌合相手側 ポストヘッダーアセンブリ型番

垂直型: { □-171825-□ (2 ~ 12極)
□-172057-□ (14 ~ 20極)

水平型: { □-171826-□ (2 ~ 12極)
□-172058-□ (14 ~ 20極)

⑥ 一般寸法公差

寸法範囲	適用公差
20以下	± 0.2
20を越え30以下	+ 0.3 − 0.2
30を越え40以下	+ 0.4 − 0.2
40を越え52.5以下	+ 0.5 − 0.2

⑦ 電線サイズ AWG#22 の適用は原則として全極一括結線のみとし隔極結線は行なわないこと
上記以外の仕様では別途適用可否の評価を必要とする。
(使用電線、工具、結線仕様の組み合わせによる)

"B"	"C"	"D"	"E"	極数	適用電線サイズ AWG#22 標示番号	適用電線サイズ AWG#24 標示番号	適用電線サイズ AWG#26 標示番号	適用電線サイズ AWG#28 標示番号
					色別: 赤	色別: 黒	色別: 自然色	色別: 緑
19	47.5	50.3	52.5	20	2-172051-0	2-172052-0	2-172053-0	2-172054-0
17	42.5	45.3	47.5	18	1-8	1-8	1-8	1-8
15	37.5	40.3	42.5	16	1-6	1-6	1-6	1-6
13	32.5	35.3	37.5	14	1-4	1-4	1-4	1-4
11	27.5	30.3	32.5	12	1-2	1-2	1-2	1-2
9	22.5	25.3	27.5	10	1-0	1-0	1-0	1-0
8	20.0	22.8	25.0	9	-9	-9	-9	-9
7	17.5	20.3	22.5	8	-8	-8	-8	-8
6	15.0	17.8	20.0	7	-7	-7	-7	-7
5	12.5	15.3	17.5	6	-6	-6	-6	-6
4	10.0	12.8	15.0	5	-5	-5	-5	-5
3	7.5	10.3	12.5	4	-4	-4	-4	-4
2	5.0	7.8	10.0	3	-3	-3	-3	-3
1	2.5	5.3	7.5	2	172051-2	172052-2	172053-2	172054-2

型番

番号 (NUMBER)	名称 (NAME)	摘要 (REMARKS)	ITEM NO.

組立部品 (REQUIRED PER ASSEMBLY)

記事 (DESCRIPTION)

番号 (NUMBER) C-172051

参考図面 (CUSTOMER COPY (REFERENCE ONLY))

TE Connectivity

材料 (MATERIAL)	上図参照
仕上 (FINISH)	上図参照
適合電線断面積 (WIRE RANGE)	表参照 mm² (AWG —)
被覆外径 (INSULATION DIA.)	表参照 mm (— IN)
分類 (CLASS)	—
型式 (TYPE)	—
DR.	K. Yuasa 19'80'78
CHK.	
DE.	D. Dawe 7/9/79
APP.	06/1/79
一般公差 TOLERANCE EXCEPT AS NOTED	注⑥ ±0.4 ±1.0
尺度 (SCALE)	4-1
LOC	J
SIZE	B
番号 (NO)	C-172051
REV.	D1
名称 (NAME)	リセプタクル ハウジング アセンブリー (マスターミニネーション E1 シリーズコネクタ)

LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE
D1	REVISED PER ECO-11-005140	RK	HMR	31MAR11

DIMENSIONS IN MILLIMETERS DO NOT SCALE PRINT

PRINT DIST 4

C