



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



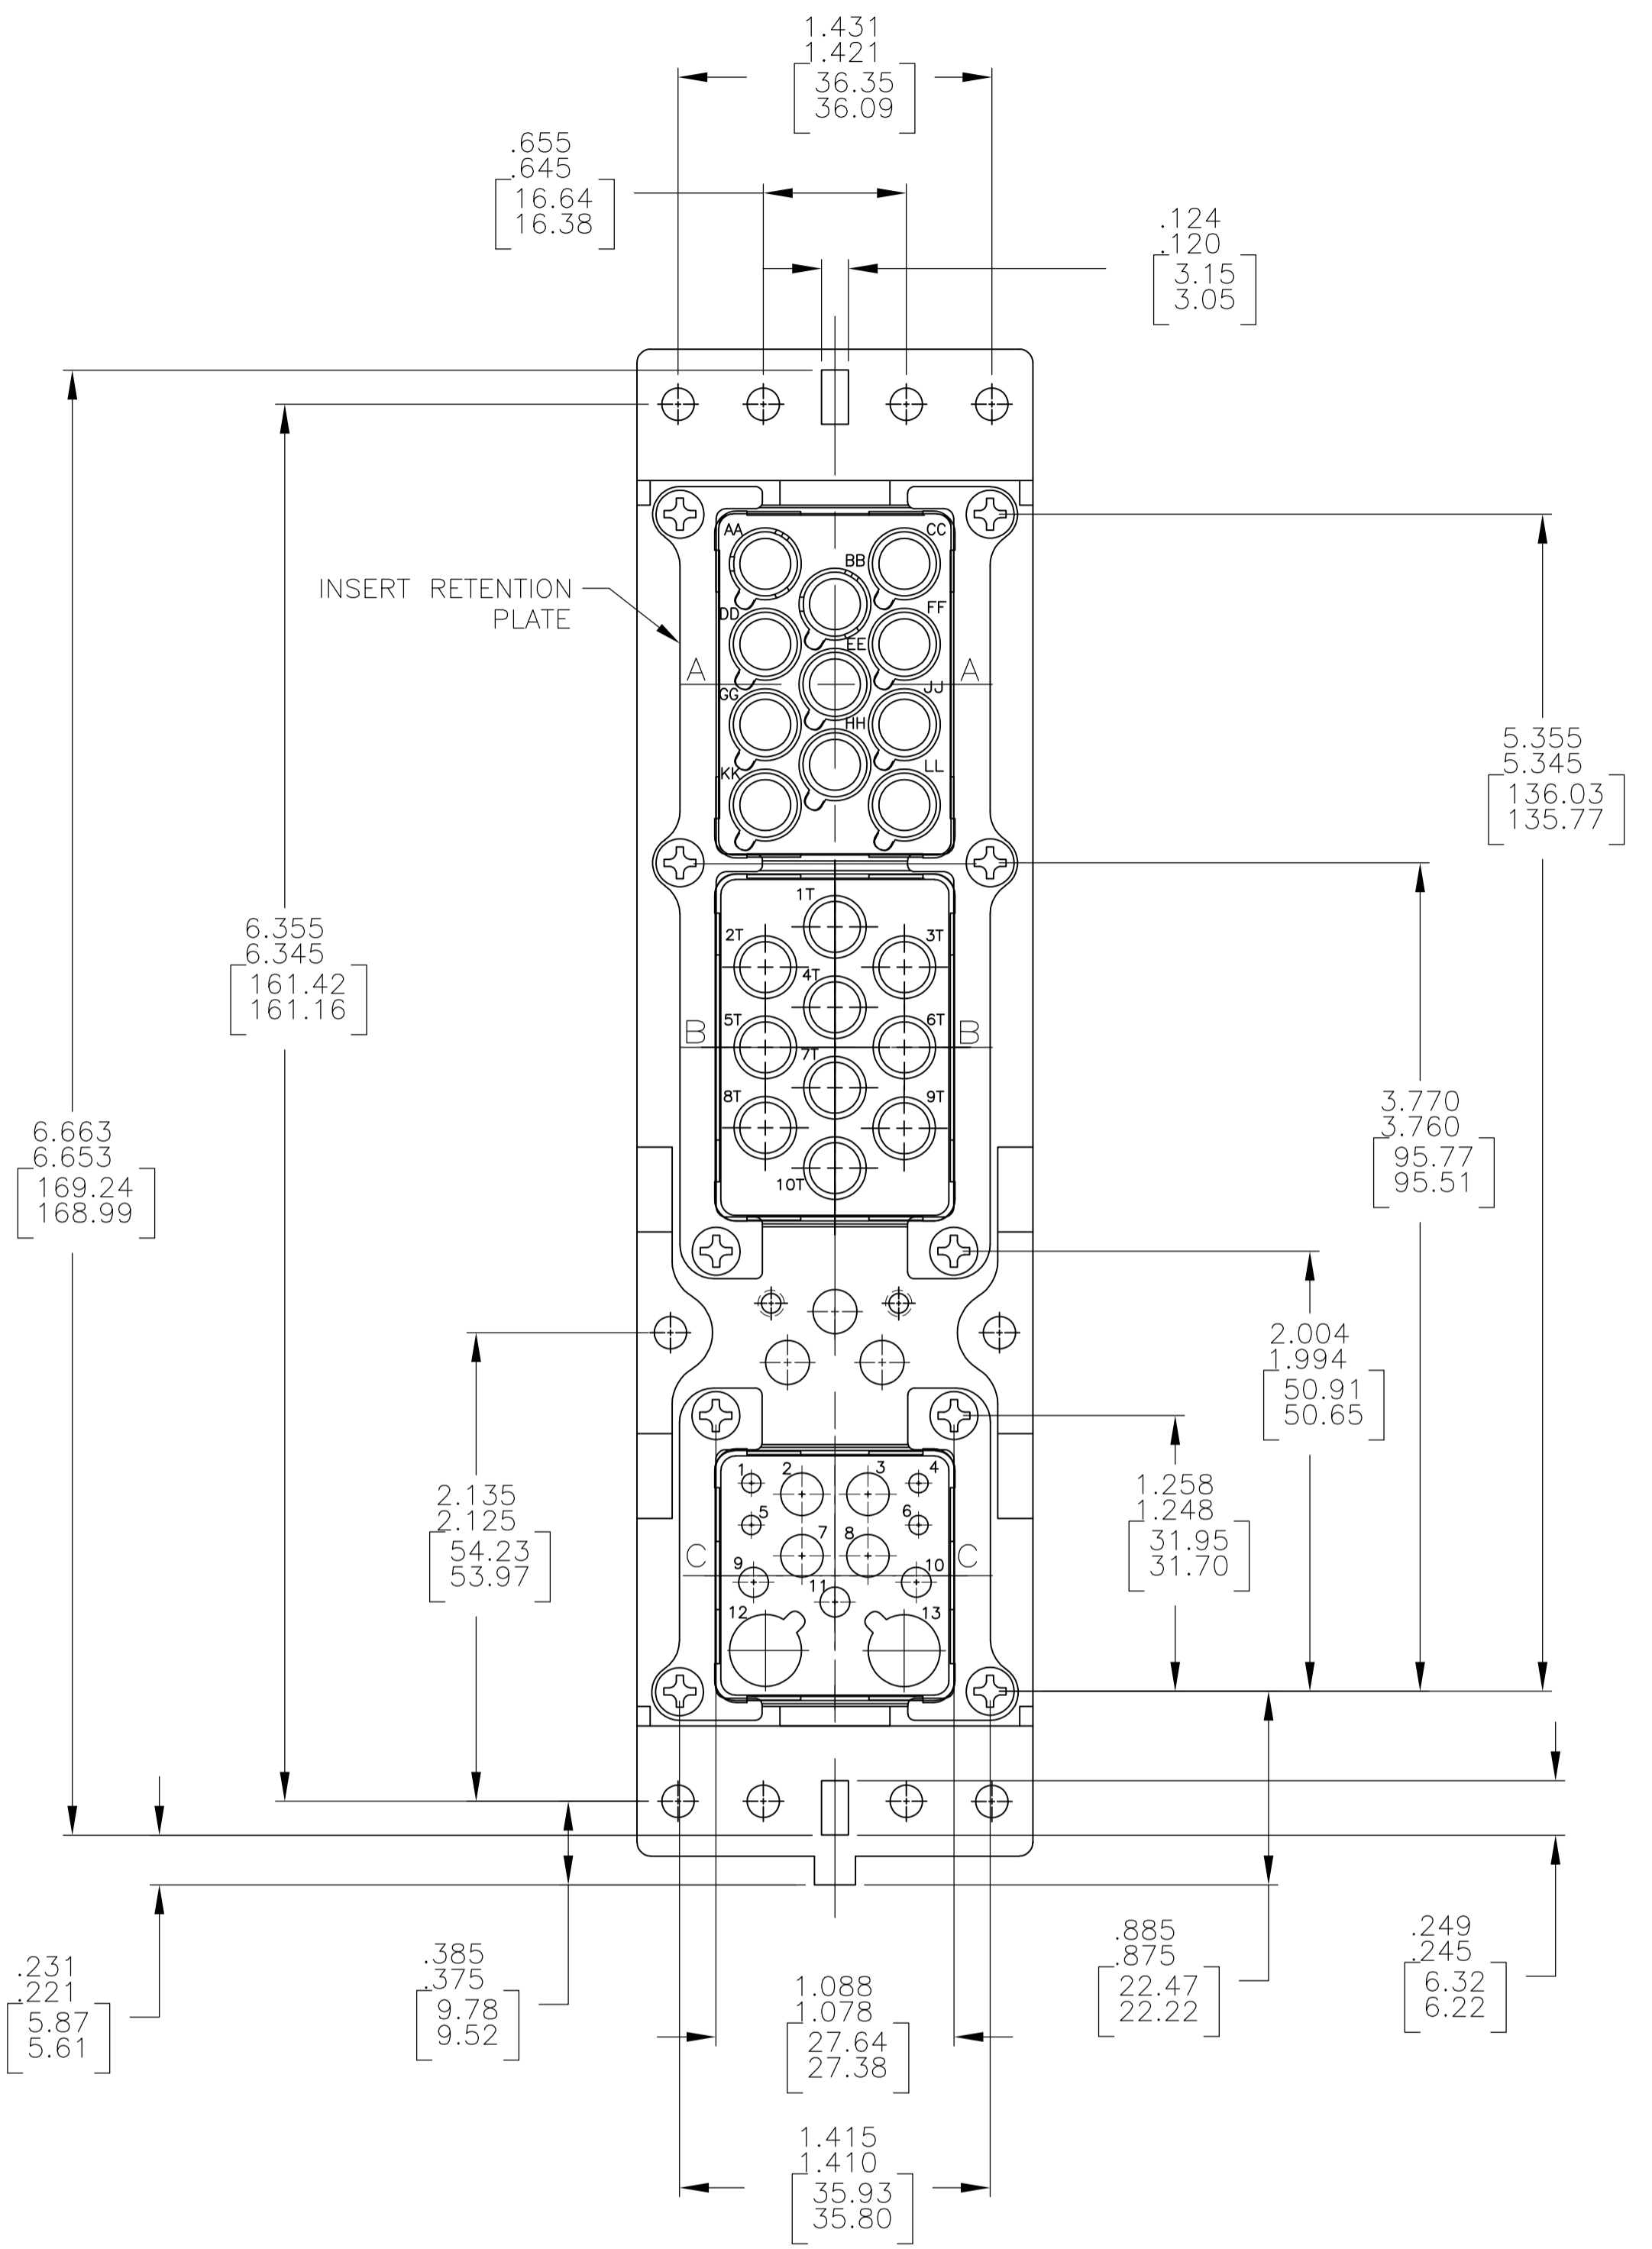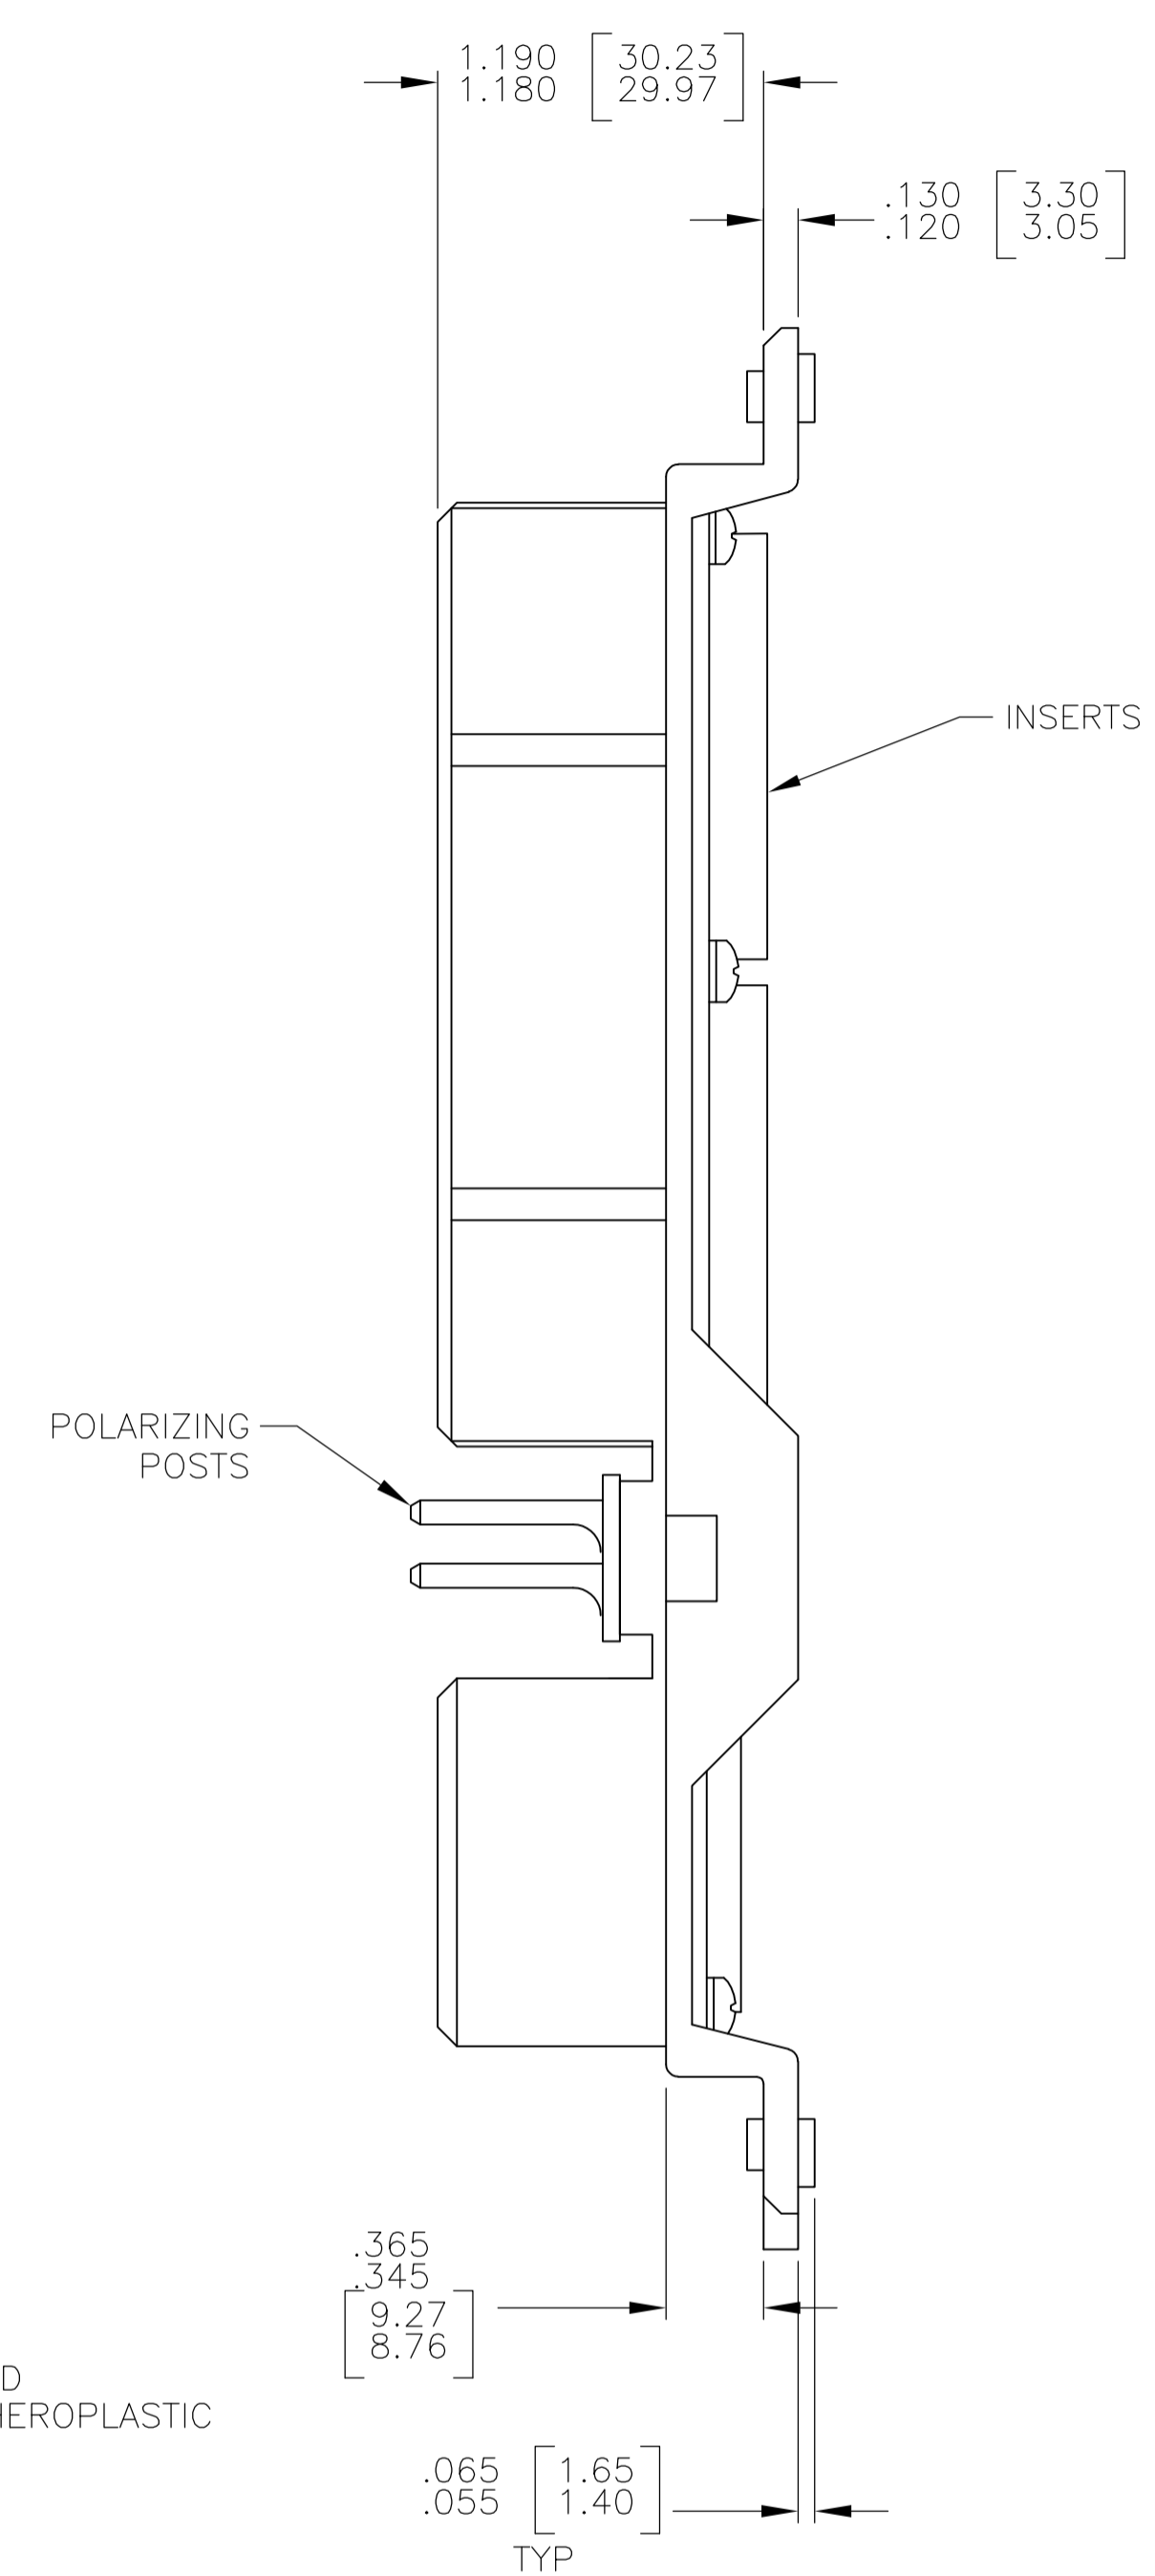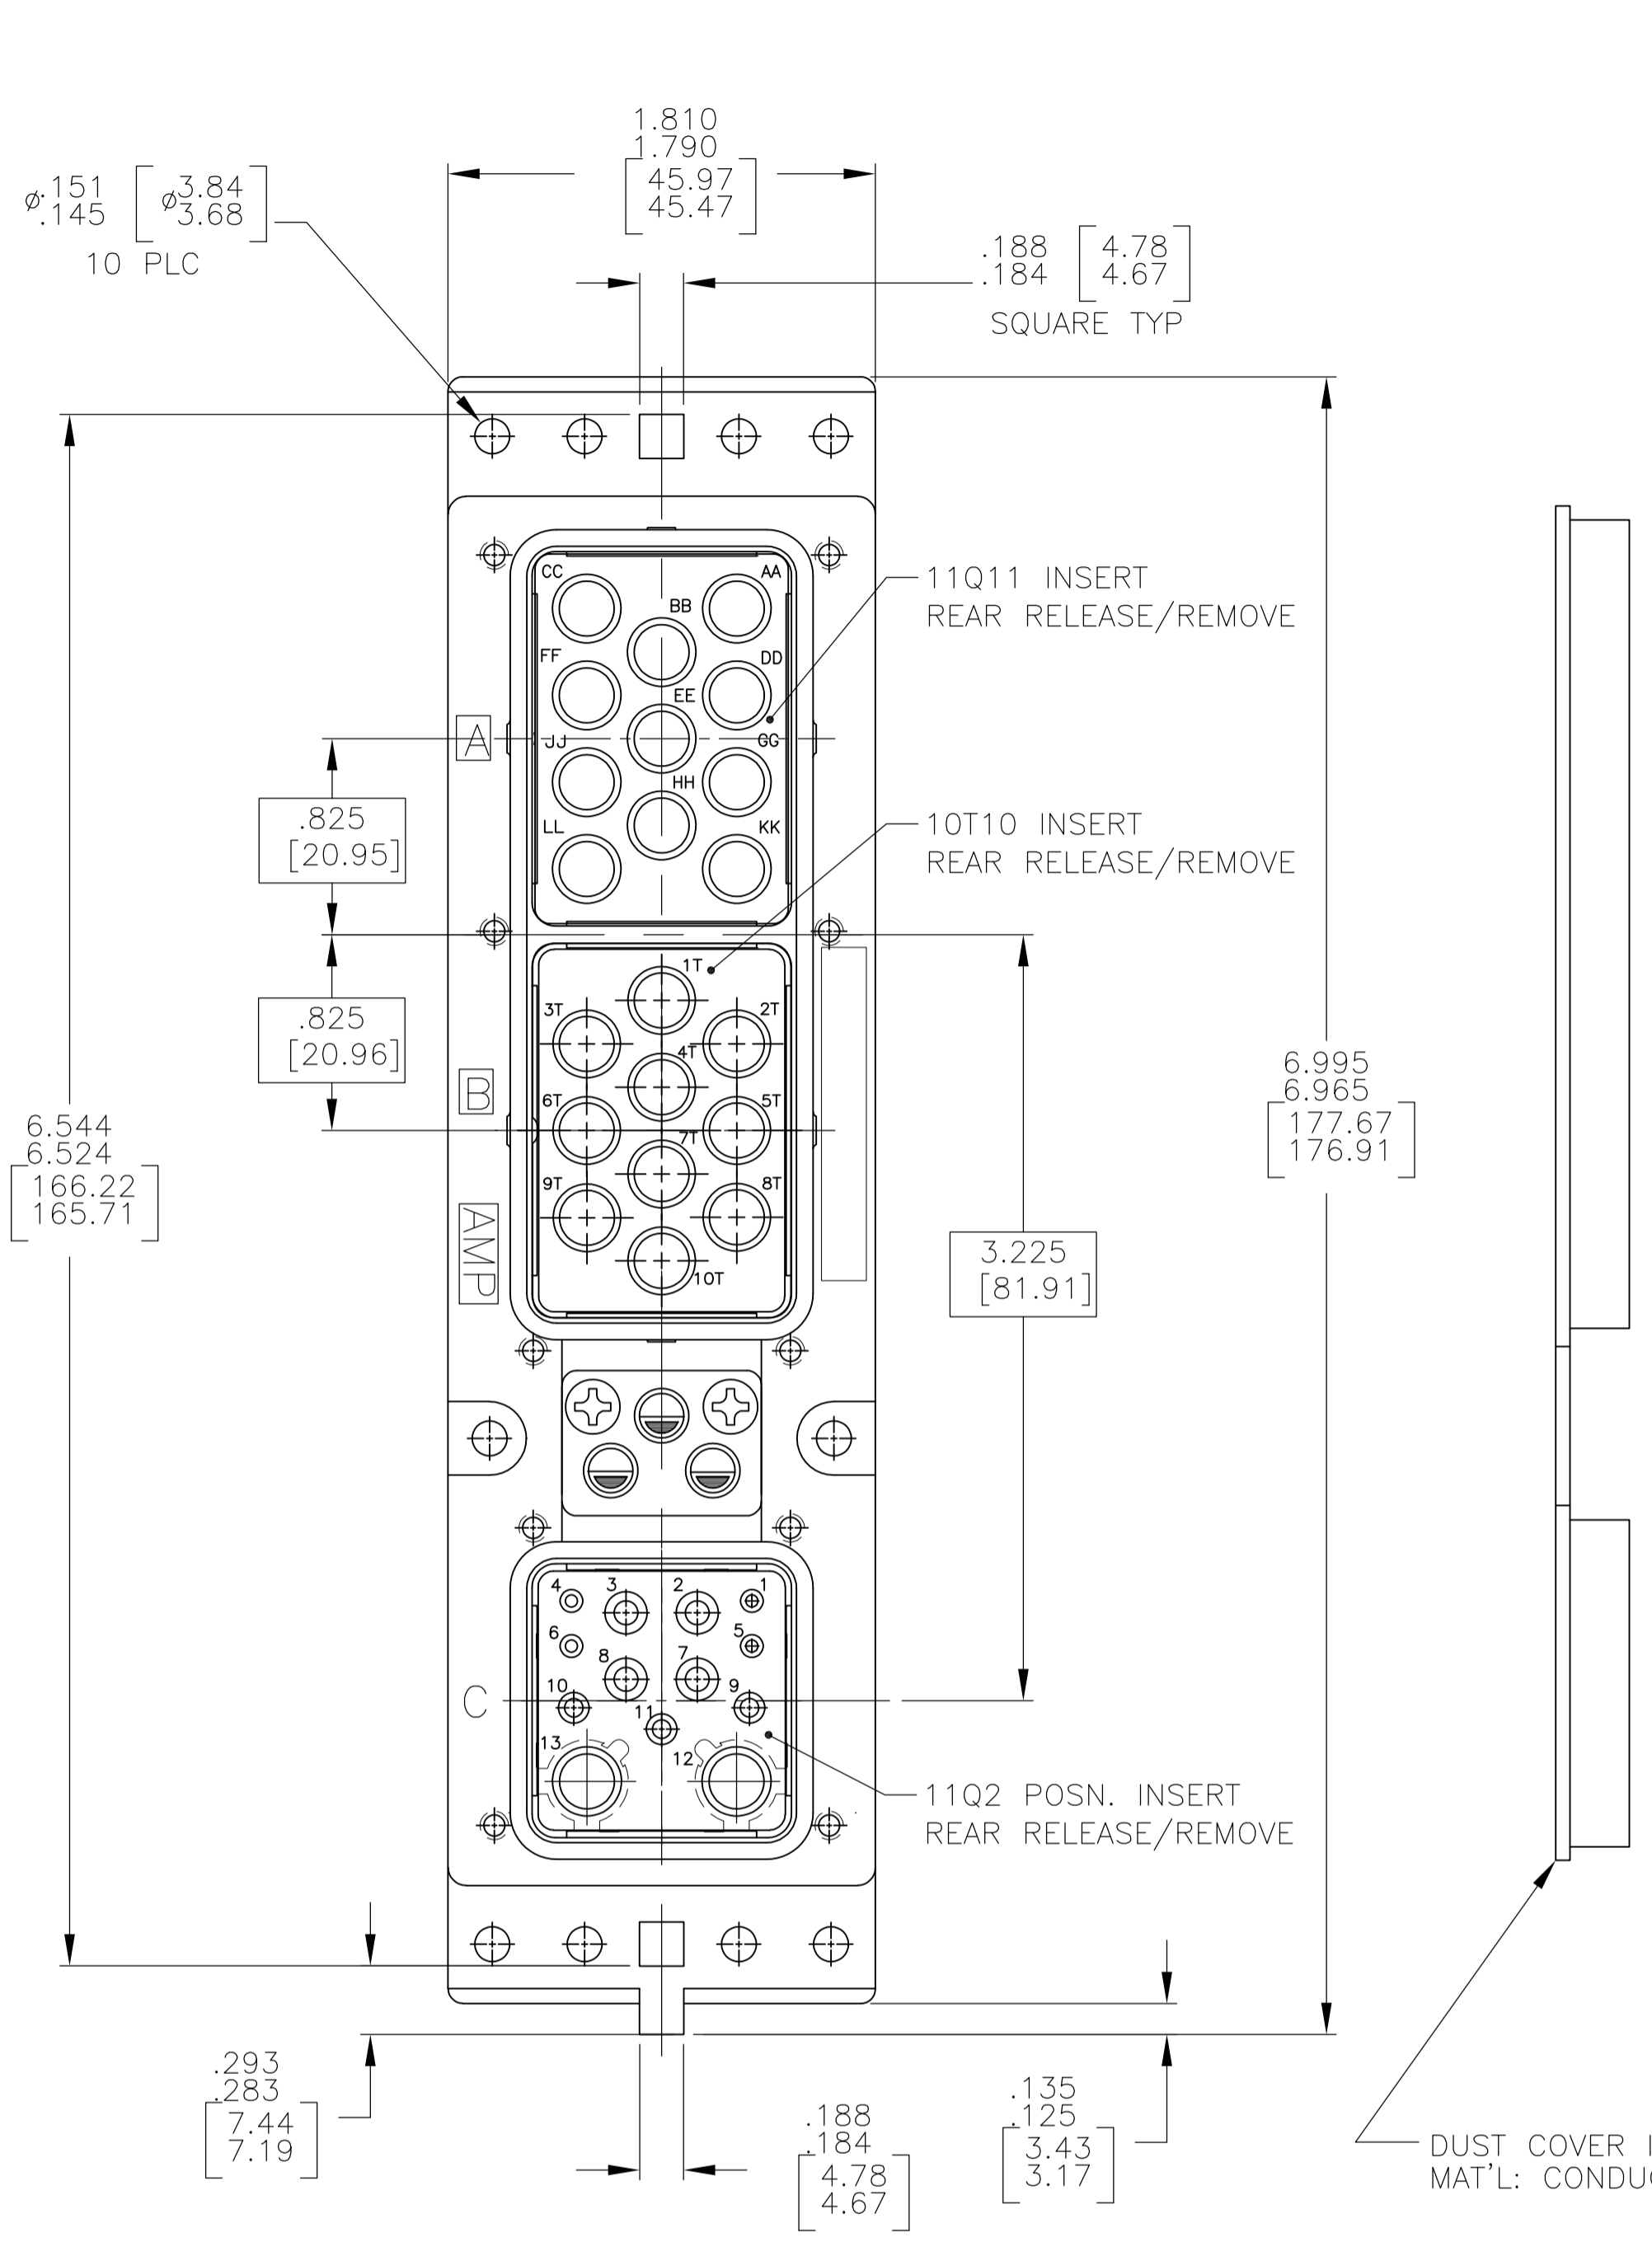

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- FOLLOWING CONTACTS AND PLUGS ARE INCLUDED AND NOT INSTALLED:
 SIZE 20 CRIMP SOCKET CONTACT: AMP P/N 208267-2; QTY: 4
 SIZE 16 CRIMP SOCKET CONTACT: AMP P/N 208270-2; QTY: 3
 SIZE 12 CRIMP SOCKET CONTACT: AMP P/N 208273-2; QTY: 4
 SIZE 8 QUADRAX SOCKET CONTACT: AMP P/N 1445693-1; QTY: 2
 SIZE 8 FILLER PLUG: AMP P/N 448545-3; QTY: 15
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- SIZE 8 COAX CONTACTS ARE NOT INCLUDED; MUST BE PURCHASED SEPARATELY.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING POSTS	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
11Q11 QUADRAX & 10T10 INSERT	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 3 OR 4, GRADE B
11Q2 INSERT	THERMOSET	-

OBSELETE	"01"	1883850-1
KEYING POSITION	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005 [0.13]
 4 PLC ± -
 ANGLES ± -
 FINISH SEE TABLE

DWN: C.C.THOMAS 12-11-06
 CHK: K.HOGAN 12-11-06
 APVD: K.HOGAN 12-11-06
 NAME: PLUG ASSY, SIZE 2, ARINC 600, (11Q11RR/10T10RR/11Q2RR)
 SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 1883850
 WEIGHT: -
 CUSTOMER DRAWING

SCALE: 1:1
 SHEET: 1 OF 1
 REV: B