imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Series 350000 SOIC and SOJ-to-DIP Adapter

FEATURES


- A cost-effective means of upgrading to SOJ or SOIC without changing your PCB lavout
- Available on 0.300 [7.62] centers. Consult <u>Data Sheet 18011</u> for adaptors on 0.400 [10.16] or 0.600 [15.24] centers

GENERAL SPECIFICATIONS

- BOARD MATERIAL: 0.062 [1.58] thick FR-4, UL94V-0, with 1-oz. Cu traces, both sides
- PINS: Brass 360 1/2-hard per UNS C36000 ASTM-B16-00
- PIN PLATING: 200µ [5.08µ] min. Sn per ASTM B 545 Type-1 or Sn/Pb 93/7 per ASTM B 545 over 100µ [2.54µ] Ni per SAE-AMS-QQ-N-290
- OPERATING TEMPERATURE: 221°F [105°C]

MOUNTING CONSIDERATIONS

SUGGESTED PCB HOLE SIZE: 0.028 ±0.003 [0.71 ±0.08] dia.

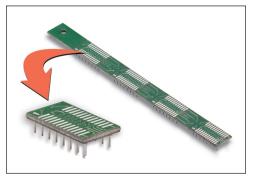

CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. NOTE: Aries reserves the right to change product general specifications without notice.

Optional Panelized Form

18010

Pin Plating

0 = Sn/Pb

1 = Au/Ni

ORDERING INFORMATION

XX-35000X-1X-P


ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

"A" = NO. OF PINS PER ROW x 0.100 [2.54]

"D" = (NO. OF PINS PER ROW -1) x 0.100 [2.54]

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

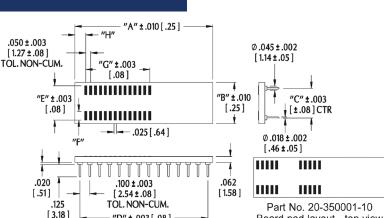

Pins

Series

(see Table)

Board pad layout - top view

P/N	Pins	Туре	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
08-350000-1X	8	SOIC	0.460 [11.68]	0.300 [7.62]	0.455 [11.56]	0.155 [3.94]	0.150 [3.81]	0.121 [3.07]
14-350003-1X	14	SOIC	0.380 [9.65]	0.300 [7.62]	0.322 [8.18]	0.080 [2.03]	0.300 [7.62]	0.200 [5.08]
14-350000-1X	14	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.500 [12.70]	0.180 [4.57]
16-350000-1X	16	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
18-350000-1X	18	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
20-350000-1X	20	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
24-350000-1X	24	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
20-350001-1X	20	SOJ	0.420 [10.67]	0.300 [7.62]	0.350 [8.89]	0.090 [2.29]	0.550 [13.97]	0.060 [1.52]
28-350002-1X	28	SOIC	0.400 [10.16]	0.300 [7.62]	0.350 [8.89]	0.090 [2.29]	0.650 [16.51]	0.375 [9.53]



Bristol, PA 19007-6810 USA TEL (215) 781-9956 • FAX (215) 781-9845 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

"D" ±.003[.08]