



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剥(Strip)	外剥(Roj)	顏色(Color)	H05VV-F 1.0mm <sup>2</sup> /3C  黑色(Black)  線長: (Length) 3000 <sup>+50.8</sup> / <sub>-12.7</sub>	外剥(Roj)	內剥(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
45P黑色 87A+2A Black	KE-88 (10A 250V-)	1	6±1	18±1	棕/Brown(L)		16±1	5 <sup>+1</sup> / <sub>-0</sub>	棕/Brown(L)	FM-5 (10A 250V-) (IEC 320 C13) 電腦電源線端子	45P黑色 87A+2A(Black)	1
黑色(Black)	大英式支架 (Brutain Plug Insert)	1	6±1	28±1	藍/Blue(N)		16±1	5 <sup>+1</sup> / <sub>-0</sub>	藍/Blue(N)	電腦電源線內模 (Computer power cord terminals) FM-5兩件式內模 (FM-5 Inner Body)	銅本色(Copper)	3
	10A保險絲 (10A Fuse)	1	6±1	38±1	綠注黃(E) Green/Yellow		16±1	5 <sup>+1</sup> / <sub>-0</sub>	綠注黃(E) Green/Yellow		白色(White)	1

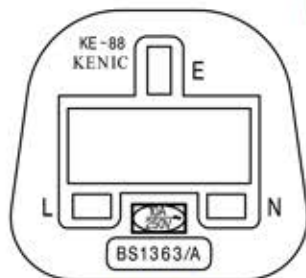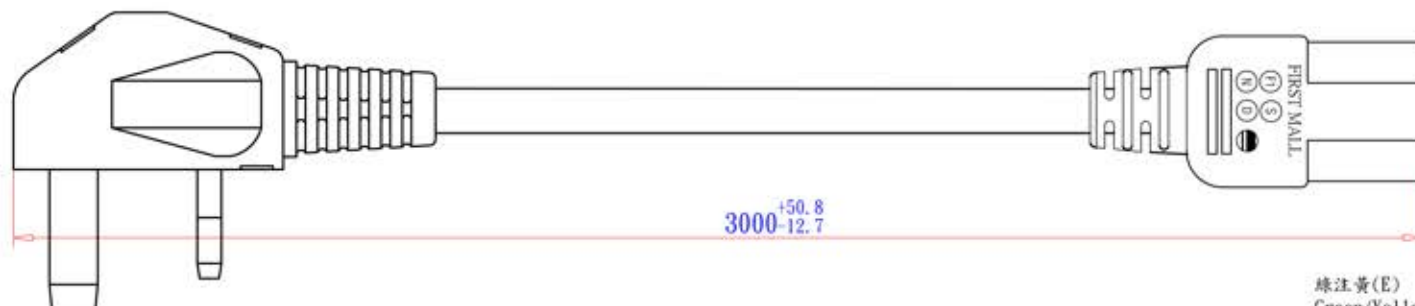

插頭端面圖  
(Dimensions of Plug Face)

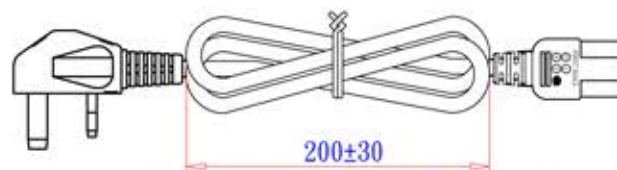


B-C3 扎線圖示 (B-C3 Hank Detail)

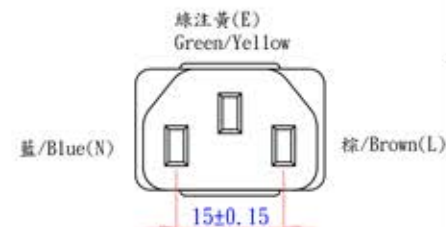

插頭端面圖  
(Dimensions of Plug Face)

Insulation Thickness 0.60 mm  
Overall Diameter 2.55±0.10 mm  
  
Copper Conductor  
32/0.20±0.008 mm  
Resistance 19.5  
(20°C Max), ohms/km  
  
Jacket Thickness 0.80mm  
Overall Diameter 7.1±0.20mm

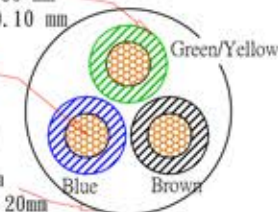

線材截面圖  
(Wire Cross-Section)

包裝方式(Packing)

扎線方式 (Bulk Pack)	依繞線圖示繞線 See Hank Detail(B-C3)	
紙箱尺寸 (Carton Size)	480 X 320 X 250	
包裝數量 (Packing Q'ty) 標籤(Label)	PCS	
正側唛頭 (Carton Print)	依客户要求印刷 (See Purchase Order)	1. 高壓測試:2000V/1Sec <3mA (Hi-Pot Test:2000v/1Sec <3mA)
電線印字內容 Wire Printed	使用充實 線材 四印字 (Un-Filler, Gravure)	紙箱唛頭標碼 Shipping Mark

<VIDED> KEMA-KEUR IEMMEQU S E N D G H05VV-F  
3X1.0mm<sup>2</sup> G TSA-3 1.0mm<sup>2</sup> NSW21631 CCC 60227 IEC 53(RVV) 300/500V  
3X1.0mm<sup>2</sup> CCC 2003010105027526 GB5023.5-2008 WONDERFUL-DG -LF-

CnC

SIGNATURE	NAME	DATE			
APPROVED					
M.F.G. CHECKED			2012 00 0419	新版發行	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION	SYMBOL
DRAWN	楊承正	2012/04/19	PART No.	800-1.00-16H-BL-00300	
CUSTOMER			DWG No.		

CnC Tech, LLC

Industrial Cable and Connector Technology

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	