



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



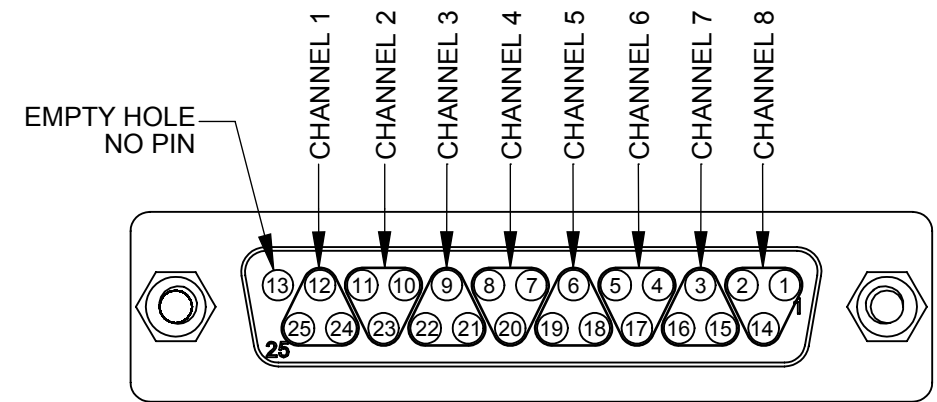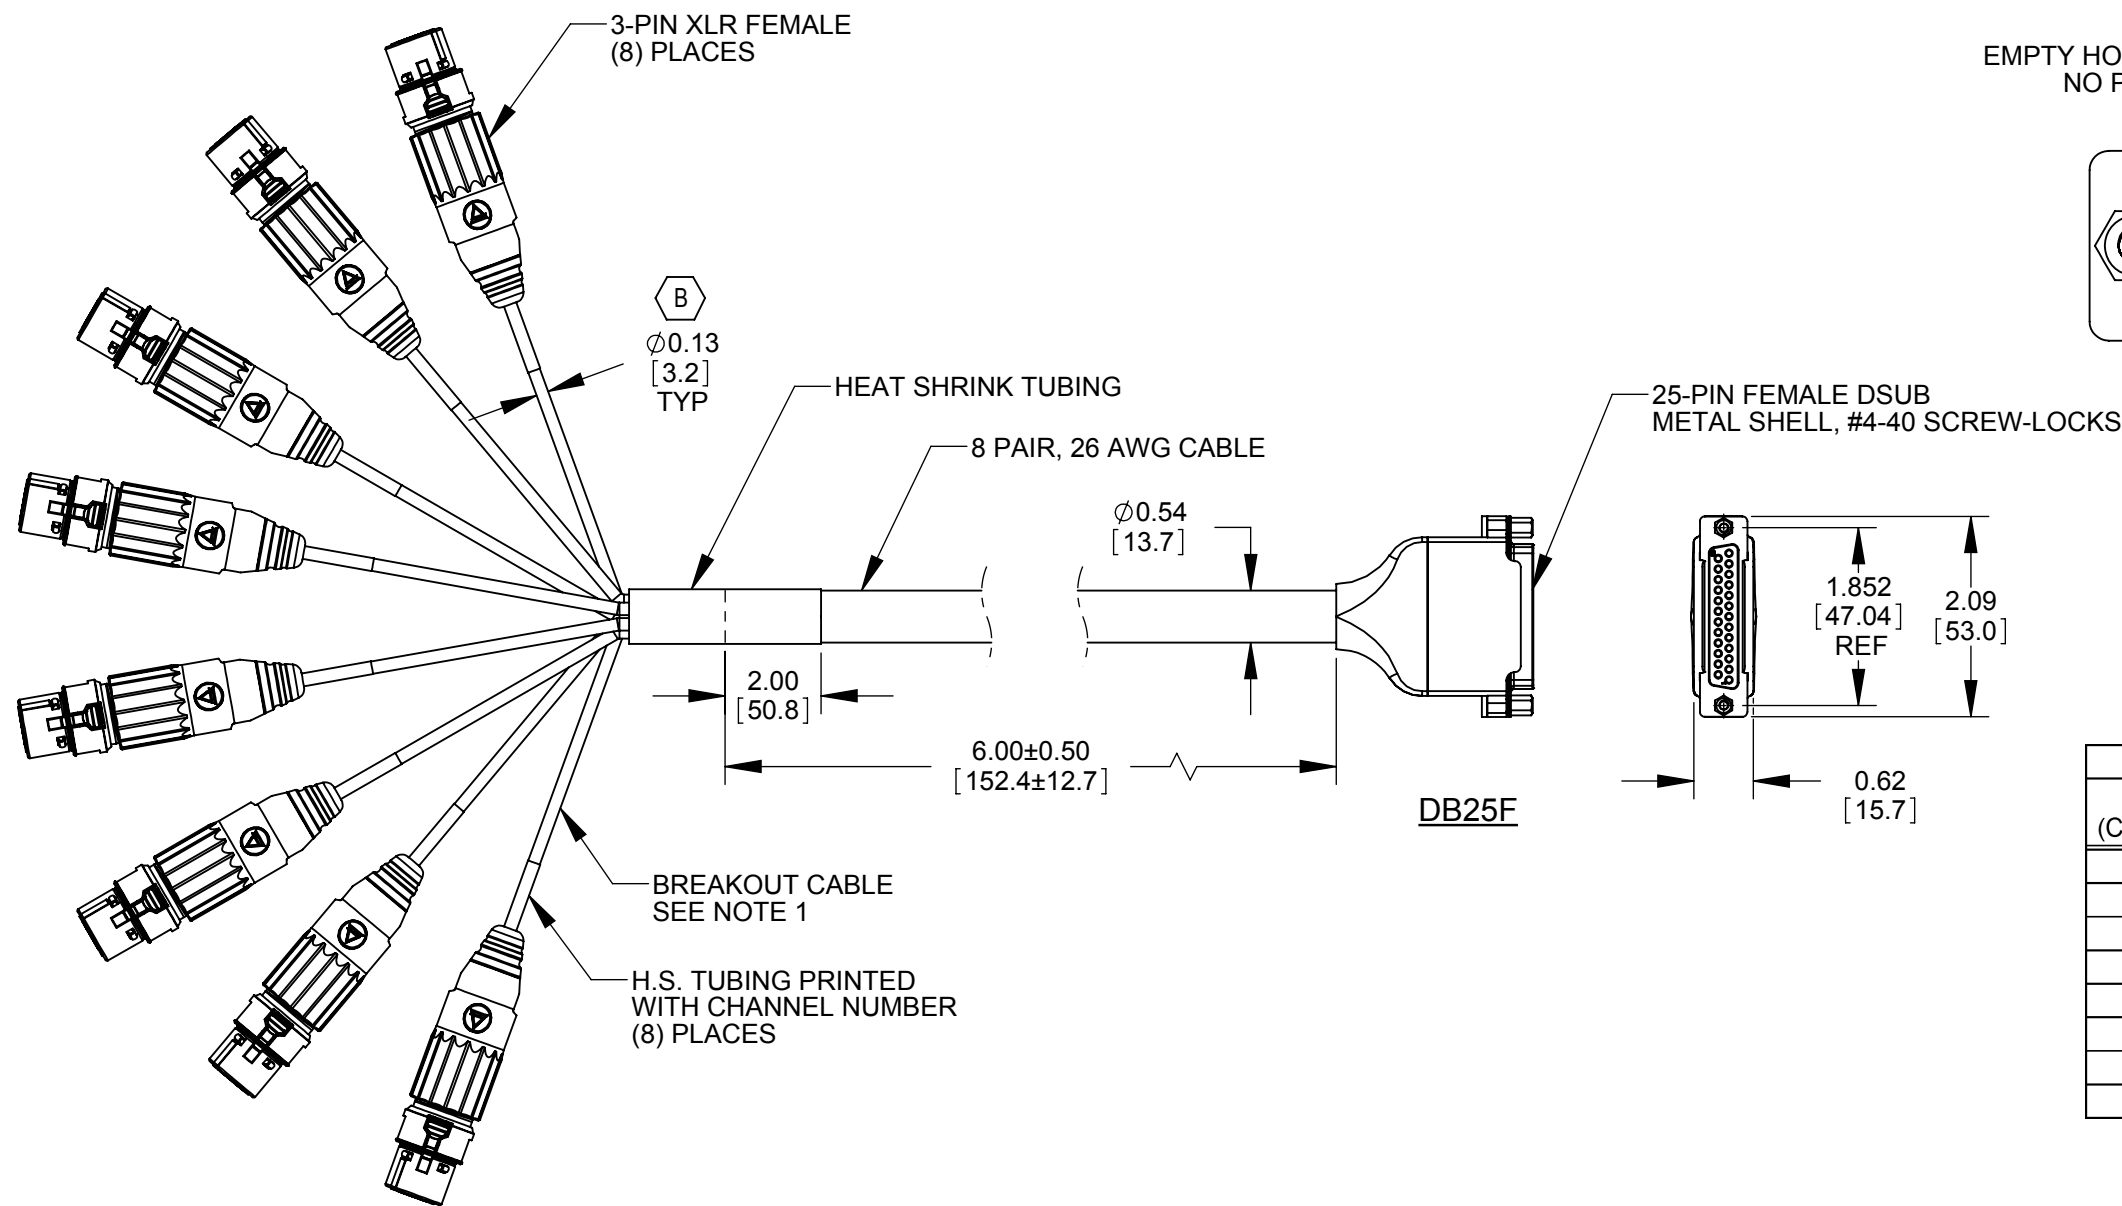

DB25F PIN-OUT VIEW

DB25F AND XLRF WIRING CHART					
XLR (CHANNEL)	XLR (DESC.)	CABLE (COLOR)	PIN 2 (RED)	PIN 3 (BLACK)	PIN 1 (BARE)
1	XLRF	BROWN	24	12	25
2	XLRF	RED	10	23	11
3	XLRF	ORANGE	21	9	22
4	XLRF	YELLOW	7	20	8
5	XLRF	GREEN	18	6	19
6	XLRF	BLUE	4	17	5
7	XLRF	PURPLE	15	3	16
8	XLRF	GRAY	1	14	2

NOTES:

1. BREAKOUT CABLE LENGTH: 18 +/- 0.75 INCHES. SEE TABLE FOR COLOR.

B 2. THIS PRODUCT COMES COILED AND PACKAGED IN BAG.

B 3. MATERIALS:  
XLR FEMALE CONNECTOR:  
HANDLE - ZINC ALLOY, NICKEL PLATED  
HOUSING AND LATCH - ZINC ALLOY, NICKEL PLATED  
INSULATOR - THERMOPLASTIC, GREEN  
SOCKET CONTACTS - SPECIAL COPPER ALLOY, SILVER PLATED  
H.S. TUBING - THERMOPLASTIC  
DSUB:  
CABLE CLAMP - COPPER, NICKEL PLATED  
SHELL - STEEL, TIN PLATED  
INSULATORS - THERMOPLASTIC  
SCREW LOCKS - BRASS, NICKEL PLATED

4. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					<div>UNLESS OTHERWISE SPECIFIED</div> <div>1. ALL DIMENSIONS IN INCHES [mm]</div> <div>- TWO PLACE DECIMALS ±0.02 [0.5]</div> <div>- THREE PLACE DECIMALS ±0.005 [0.13]</div>	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.											
						SIZE	WIDTH		MULT		LBS/M		TEMPER				
						FINISH						MATERIAL					
						SPEC No.						SPEC No.					
C	27520	06/08/15	PC	TJK		FIRST USED ON				SCALE 1:2		<div>Switchcraft®</div>					
B	26637	10/4/10	RS	TJK		DATE DRAWN		BY	CHKD		APVD						
A	26568	7/20/10	RS	TJK		7/16/09		JGK	RS 12/1/10		TJK 12/1/10		SHEET 1 OF 1				
						NAME								PART No.			REV
REV	ECO NUMBER	DATE	BY	APVD		DB25F TO 8-XLRF, RoHS								DB25FXLRF			C
REVISIONS						DO NOT SCALE DRAWING											