



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART NO.	ENG. NO.	
02-09-2170	42138-(P90 I)	
02-09-2171	42138-(P90 I)L	
02-09-2172	42138-I(P90 I)	OBSOLETE
02-09-2173	42138-I(P90 I)L	
	-	
	-	

LEGEND

42138-*(****)*


CRIMP STYLE
BLANK="A"
I="B"

FORM
BLANK=CHAIN
L=LOOSE

P=PREPLATE
BLANK=POSTPLATE




FINISH CODE

FINISHES, PER ES-88:
901 HOT TIN DIP .000020/(0.0005) MIN.

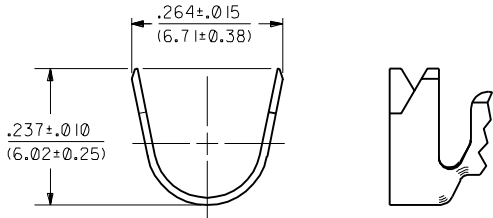


VIEW "A-A"
CRIMP STYLE "B"

- NOTES:
- TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 18 AWG WIRE.
 - INSULATION CRIMP STYLE "A" ACCEPTS A MAX. INSULATION DIA. OF .180/(4.57). INSULATION CRIMP STYLE "B" IS INTENDED FOR DOUBLE CRIMP OF TWO 18 AWG WIRES; ONE WITH A MAX. INSULATION DIA. OF .170/(4.32), THE OTHER A MAX. INSULATION DIA. OF .110/(2.79) .

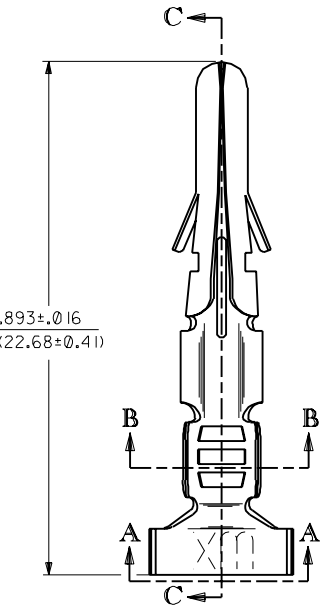


VIEW "A-A"
CRIMP STYLE "A"



SECTION "B-B"

MATERIAL:
CARTRIDGE BRASS, ALLOY #C26000,
.013/(0.33) THICK, SPRING TEMPER.

CHAIN FORM
FULL SCALE



DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°	
3 PLACE	± .010	INCH	METRIC
2 PLACE	± .014	± 0.25	
1 PLACE	---	± 0.35	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY: GKC	CHK'D. BY: RW	SCALE: 6 : 1	
FILE NAME: S42138X1		DIV. CP	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			

MFG.	SH.	REV.	LTR.	REVISIONS
REVISE ONLY ON CAD SYSTEM				
TITLE: CRIMP TERMINAL, MALE .093/(2.36) DIA. 14-18 AWG W/LARGE INSUL.				
PART NO. SEE CHART		SHEET NO. 1 of 1 DATE 2/21/92		
MOLEX INCORPORATED		U.S.A.		
L15LEJLL 60532		DRWG. NO. SD-42138-		

H	OBSOLETE P/N UCR2002-0270 COMERCIAL 01/10/9
GI	REVISED ECR U3 0507 STAMBAUGH 99-2-9
G	REVISE PER ECR U3 0507 4/1/93 RW
F	REVISE PER ECR U3 0159 2/9/93 RW
E	REVISE PER ECR U2 0674 4/28/92 RW
D	REVISE & REDRAW PER ECR U2 0081 2/21/92 RW

42138

A