



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

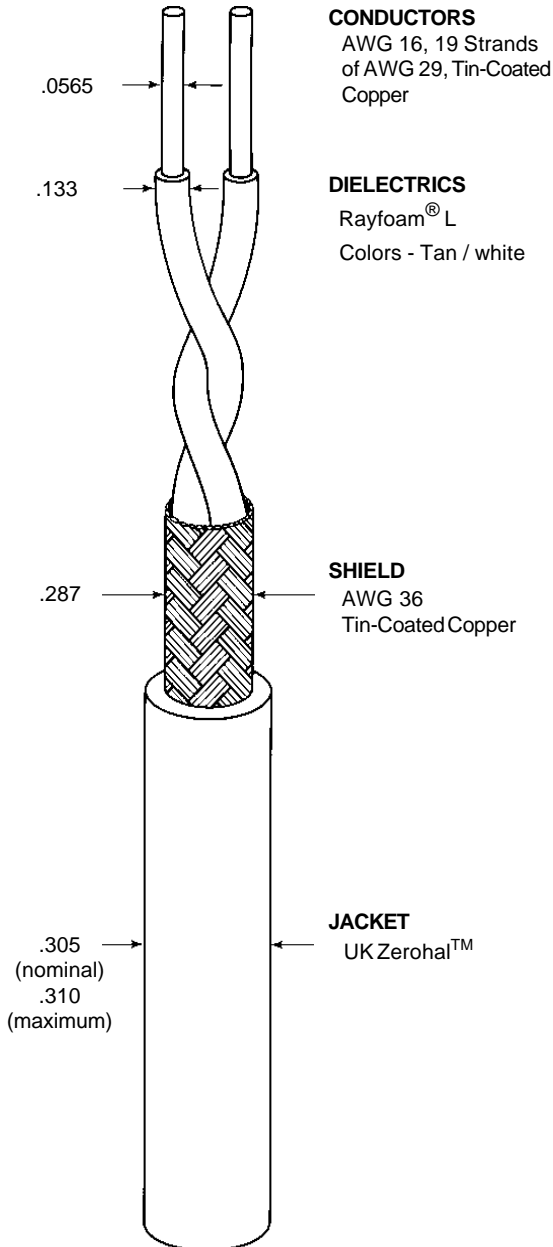

CHARACTERISTIC IMPEDANCE	100 ± 8 ohms, Method C at 1 MHz
CAPACITANCE - MUTUAL	17.0 pF/ft. (maximum) at 1 kHz
VELOCITY OF PROPAGATION	77% (nominal)
PROPAGATION DELAY	1.32 ns/ft (nominal) 1.70 ns/ft (maximum)
ATTENUATION	0.61 dB/100 ft. (nominal) at 1 MHz 2.29 dB/100 ft. (nominal) at 10 MHz 8.07 dB/100 ft. (nominal) at 100 MHz
STRUCTURAL RETURN LOSS	20 dB (nominal) - 1-20 MHz 18 dB (nominal) - 40 MHz 17 dB (nominal) - 80 MHz 16 dB (nominal) - 100 MHz for 100 meters

ADDITIONAL REQUIREMENTS

ELECTRICAL	
CONDUCTOR RESISTANCE	4.69 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000ft.
JACKET FLAWS	
SPARK TEST	1.0 kV (rms)
IMPULSE TEST	6.0 kV (peak)
RESISTANCE UNBALANCE	5% (maximum)
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)
ENVIRONMENTAL	
FLAMMABILITY	Method B
HEAT SHOCK	225°C
JACKET SMOKE INDEX	25 (maximum)
(Qualification Test per MIL-DTL-24640/4D)	
JACKET TOXICITY INDEX	5 (maximum)
(Qualification Test per MIL-DTL-24640/4D)	
LOW TEMPERATURE- COLD BEND	-30°C/8.00 inch mandrel
VOLTAGE WITHSTAND (POST ENVIRONMENTAL)	1000 volts (rms), 1 minute
PHYSICAL	
INSULATION (DIELECTRIC)	
(Prior to Cabling)	
ELONGATION	50% (minimum)
TENSILE STRENGTH	1000 lbf/in ² (minimum)
JACKET	
ELONGATION	150% (minimum)
TENSILE STRENGTH	1200 lbf/in ² (minimum)
JACKET THICKNESS	.009 (nominal)
SHIELD COVERAGE	90% (minimum)

Outer jacket will be black (designated by a "-0" appended to the part number, e.g., 0016D0811-0) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

PRODUCT IDENTIFICATION: The jacket shall be marked in a contrasting color at 12 inch (nominal) intervals between marks as follows: " RAYCHEM 0016D0811-0 "

WEIGHT 43.2 lbs/1000 ft. (nominal)

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.