



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




1. SCOPE

This specification covers the characteristics of size 0201, Base Metal X5R dielectric, 0.1 uF capacitance, +/- 10% tolerance, 10 VDC rated ceramic chip capacitors with nickel barrier gold (flash) finish termination.

2. DIELECTRIC CHARACTERISTICS - X5R (BW)

Operating Temperature Range:	-55°C to +85°C
Temperature Coefficient:	+/- 15% Change in capacitance @ 1 Vrms
Dissipation Factor:	10% Max. @ 25°C
Insulation Resistance, 25°C:	>10 Giga-Ohms
Dielectric Withstanding Voltage:	25 VDC
Aging Rate:	5% Typical
Test Parameters:	1KHz, 1.0 Volts +/- 0.2 Vrms, 25°C

3. PHYSICAL DIMENSIONS (NOT SCALED)

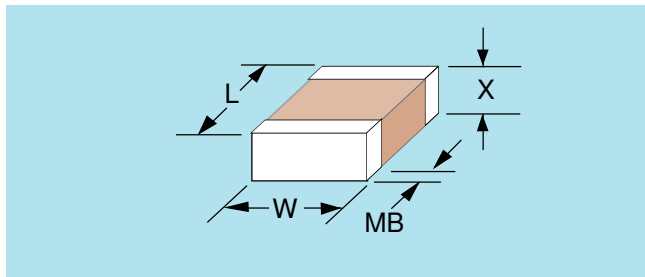

Dimensions	L	W	X	MB
Inches (mm)	.0235 (0.6)	.0118 (0.3)	.013 (0.33)	.006 (0.15)
+/- in (mm)	.0015 (0.03)	.0012 (0.03)	Max	.002 (0.05)

4. PART NUMBER DESCRIPTION

0201 BW 104 K 100 NG T

0201	= Size
BW	= X5R Dielectric (Base Metal Electrodes)
104	= Capacitance Code (pF): First two digits are significant, third digit denotes number of zeros
K	= Capacitance tolerance: K = +/- 10%
100	= DC Voltage Rating: First two digits are significant, third digit denotes number of zeros
NG	= Termination: Nickel Barrier with Gold flash finish
T	= Packaging: Tape and Reel

REVISION: A

NOVACAP P/N: 0201BW104K100NGT
 CUSTOMER:
 CUST. P/N:

SPEC DESIGNER _____ MK 5/25/17
 SPEC MANAGER _____ MK FOR BN 5/25/17
 ENGINEERING _____ MK FOR BN 5/25/17