



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FOR 5 x 20 mm FUSES

5 x 20 mm Low Amperage P.C. Board Type





APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

SPECIFICATIONS:

- Electrical:** Rated for 3.15 amperes at 250 volts.
- Dielectric Strength:** 3000 volts minimum.
- Terminals:** Tin plated copper alloy.
- Base:** Gray thermoplastic with UL 94V0 flammability rating.
- Ambient Temperature:** 60°C maximum.

ORDERING INFORMATION:

Catalog Number	Number of Poles
354 252	1

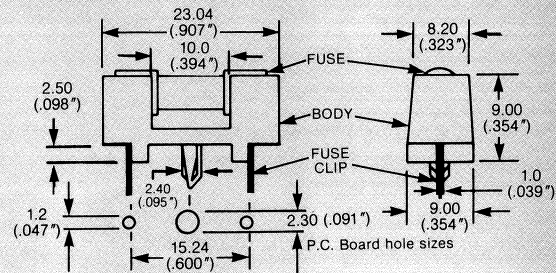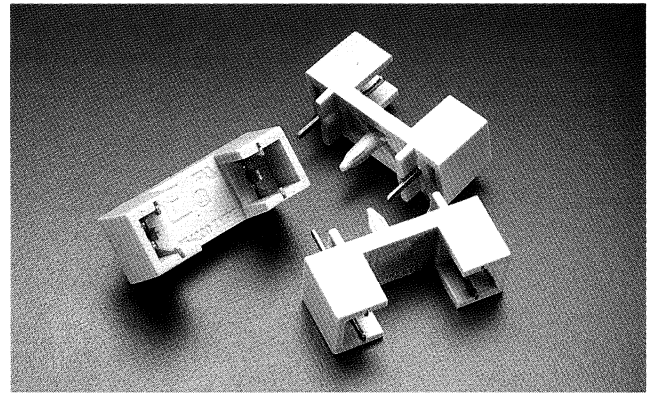

Note: Metric dimensions are shown. Inches are in parentheses.



5 x 20 mm P.C. Board Type

SPECIFICATIONS:

- Electrical:** Rated for currents up to 6.3 amperes, 250 volts.
- Clip/Terminals:** Tin plated spring brass. Ear type.
- Base:** Phenolic laminate. UL 94V0 flammability rating.
- Ambient Temperature:** 120°C maximum.

ORDERING INFORMATION:

Catalog Number	Number of Poles
520 002	1

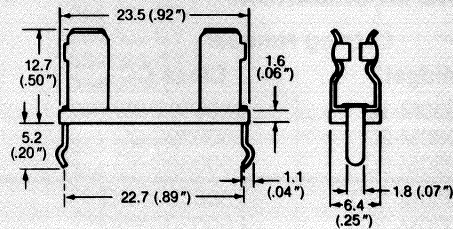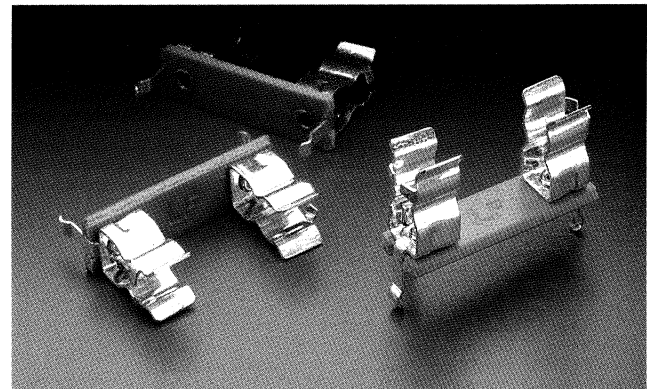

Note: Metric dimensions are shown. Inches are in parentheses.