



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






CKT SIZE	*A* DIM	*B* DIM	*C* DIM	*D* DIM	*E* DIM	CABLE OD
18	1.320/33.55	.691/17.56	.950/24.13	1.835/46.62	.490/12.45	.310/7.87
28	1.570/39.90	.941/23.91	1.200/30.48	1.835/46.62	.490/12.45	.335/8.51
38	1.820/46.25	1.191/30.26	1.450/36.83	2.270/57.65	.490/12.45	.355/9.02
48	2.070/52.60	1.441/36.61	1.700/43.18	2.478/62.93	.569/14.45	.440/11.18
72	2.670/67.84	2.041/51.85	2.300/58.42	2.741/69.62	.726/18.45	.635/16.13

- NOTES:
1. MATERIALS:
 BACKSHELL - ZINC ALLOY DIE CAST, FINISH DULL NICKEL PLATING.
 JACKSCREW - STAINLESS STEEL, FINISH PASSIVATE.
 MOUNTING SCREW - STEEL ALLOY, FINISH CLEAR ZINC PLATING.
 2. PLUG CABLE KIT COMPONENTS TO BE BULK PACKAGED PER PK-75115-991.
 3. MOUNTING SCREW APPLICATION TORQUE TO BE MIN. 3 lbf-in AND NOT TO EXCEED 4 lbf-in.
 5. STRAIN RELIEF IS DESIGNED FOR THE CABLE DIAMETER SPECIFIED IN TABLE ON THIS PAGE.
 WHEN USING SMALLER CABLE DIAMETER, USE HEAT SHRINK TUBING TO BUILD UP THE CABLE TO THE SPECIFIED DIAMETER.



18 CKT PLUG CABLE KIT

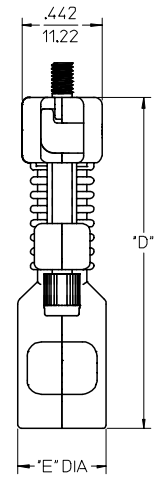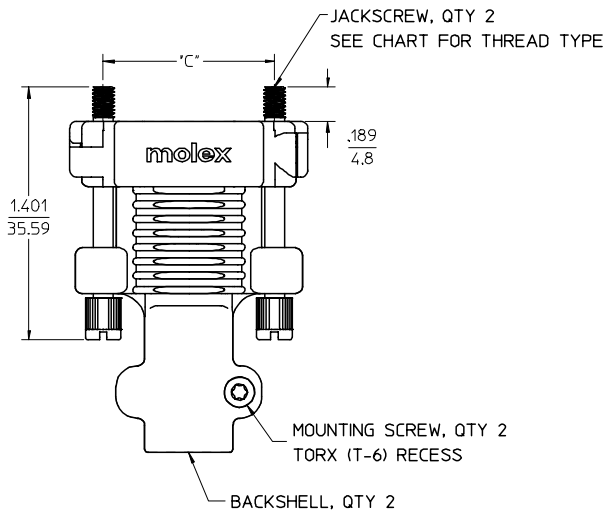

PLUG CABLE KIT (4-40 JACKSCREW)	PLUG CABLE KIT (M3 JACKSCREW)	CIRCUIT SIZE	NOT TOOLED	
75115-2072	75115-3072	72	X	CONTACT PRODUCT MARKETING
75115-2048	75115-3048	48		
75115-2038	75115-3038	38	X	CONTACT PRODUCT MARKETING
75115-2028	75115-3028	28		
75115-2018	75115-3018	18		

MOD JACKSCREW MATERIAL EC NO: UCP2007-1309 DRWN:MSIBARRA2007/02/27 CHKD:DMORGAN2007/03/05 APPR:SMILLER 2007/03/06	DESCRIPTION REV C	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 2:1 DESIGN UNITS METRIC DIMENSION STYLE IN/MM	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE SALES DRAWING TDP PLUG CABLE KIT DULL NICKEL FINISH MOLEX INCORPORATED MATERIAL NO. SEE CHART DOCUMENT NO. SD-75115-002 SHEET NO. 1 OF 1	
		DRAWN BY TMCCLELL DATE 02/11/06	CHECKED BY TMCCLELL DATE 02/11/07	APPROVED BY BANAKIS DATE 02/11/07	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
					DIMENSION STYLE IN/MM		