



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



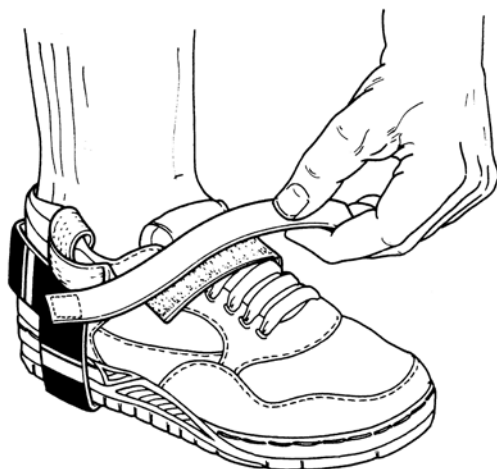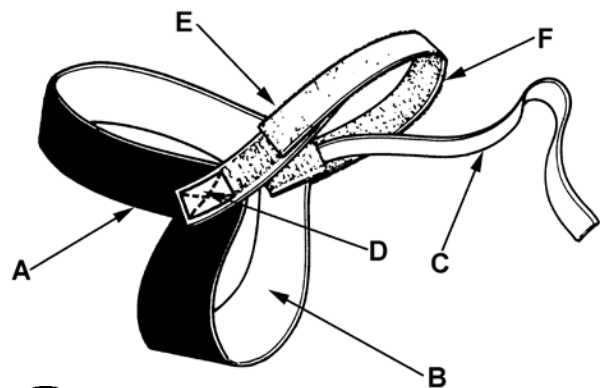

Key:

- A. Two layer rubber composite material. Material consists of a layer which provides a non-marring interior surface that will not blemish shoes and a black conductive layer to ground via ESD flooring.
- B. Non-marring inner layer.
- C. 24" conductive ribbon.
- D. One megohm fully insulated current limiting resistor.
- E. Hook and loop adjustable closure.
- F. Elastic material for comfort.

Meets the requirements of ANSI/ESD S20.20, JEDEC-108/9, MIL-HDBK-263A, MIL-STD-1686, DOD-STD-2000.

Electrical Properties are not humidity dependent meeting ANSI/ESD S20.20 flooring/footwear required limit 3.5×10^7 ohms tested at 12% and 50% relative humidity per ESD SP9.2

Caution: The foot grounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

Note:
 "ESD protective footwear is designed to reduce body charge levels by supplying a conductive path from the body to the floor material. Heel and toe grounders shall be worn on both feet to insure effective use.

The ability of footwear to remove a charge from a charged person who moves from an unprotected area to a protected one, or moves about on an ESD floor should be evaluated. As a person contacts an ESD floor material with static control footwear, the body charge should dissipate leaving minimal residual charge. (ESD Handbook ESD TR20.20-2008 section 5.3.3.3.4 Footwear Proper Usage)

Desco recommends the use of foot ground tester item No. [19252](#), [19276](#), and [19277](#). For additional information on the use and maintenance of foot grounders please ask for Technical Bulletins [TB-2020](#), [TB-2040](#), and [TB-3034](#).

	Non-Marking Inner Layer	Black Outer Layer	Test Method
Electrical Properties:			
Charge Decay	< 0.01 sec.	< 0.01 sec.	FTMS-1018, Method 4046
RTG w/1 megohm resistor	< 10 megohm	< 10 megohm	ESD SP.92
Physical Properties:			
Abrasion, 1000 grams, 4000 cycles	< 1.0 grams loss	< 0.1 grams loss	ASTM-D3389 Method B
Hardness	65 ± 5 Shore A	65 ± 5 Shore A	ASTM-D2240

One Megohm Economy Heel Grounder



DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710
 WEB SITE: www.Desco.com
 PHONE (909) 627-8178 FAX (909) 627-7449 FAX REQUEST (909) 627-7126

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
 PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER:
 07588

DATE:
 March 2010