



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RPC-1.85

Short Circuit
Jack

08K12S-000S3

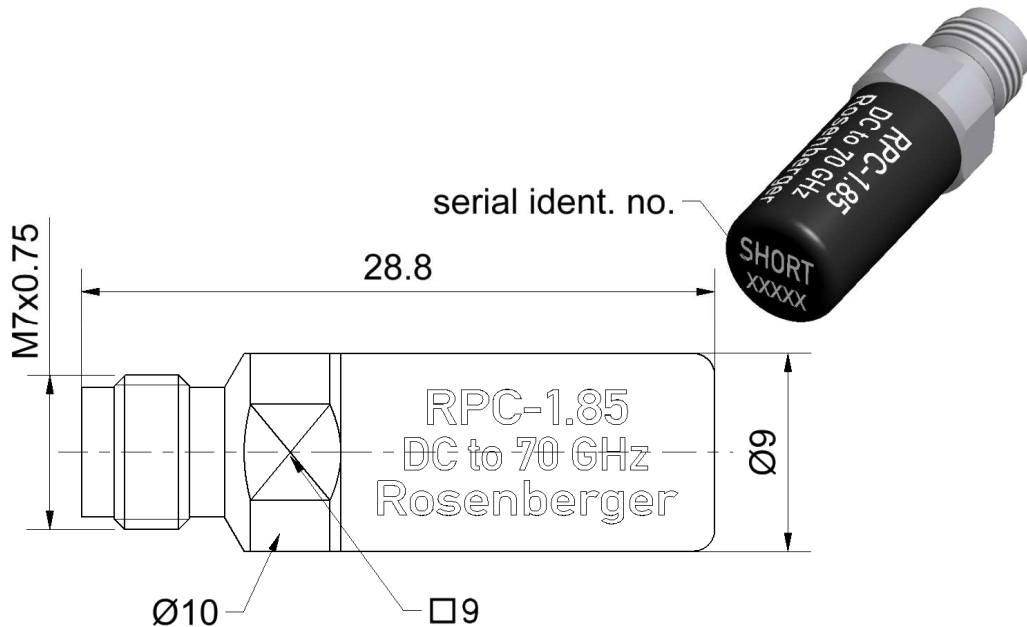

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-32
RPC-2.40

Documents

Application note

AN001 "Calibration Services"

Material and plating

Connector parts

Center conductor
Outer conductor

Material

Beryllium copper
Stainless steel

Plating

Gold, min. 1.27 µm, over nickel
Passivated

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05:10/6.0

Electrical data

| | |
|---------------------------------------|---|
| Frequency range | DC to 70 GHz |
| Return loss | ≤ 0.20 dB, DC to 4 GHz ≤ 0.20 dB, 4 GHz to 40 GHz ≤ 0.40 dB, 40 GHz to 70 GHz |
| Error from nominal phase ¹ | ≤ 2.0°, DC to 4 GHz ≤ 5.0°, 4 GHz to 40 GHz ≤ 8.0°, 40 GHz to 70 GHz |

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance

Mechanical data

| | |
|--------------------|--------------------|
| Mating cycles | ≥ 500 |
| Maximum torque | 1.65 Nm |
| Recommended torque | 0.90 Nm |
| Gauge | 0.00 mm to 0.03 mm |

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

| | |
|-------------------------------------|--------------------------------|
| Offset Z_o / Impedance / Z_o | 50 Ω |
| Offset Delay | 16.415 ps |
| Length (electrical) / Offset Length | 4.92 mm |
| Offset Loss | 4.17 G Ω /s |
| Loss | 0.0119 dB/ $\sqrt{\text{GHz}}$ |
| Short Inductance ² | |

² Short Inductance are determined individually for each Short Circuit and are documented in a Calibration Certificate.

Environmental data

| | |
|---|------------------|
| Operating temperature range ³ | +20 °C to +26 °C |
| Rated temperature range of use ⁴ | 0 °C to +50 °C |
| Storage temperature range | -40 °C to +85 °C |

RoHS compliant

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the Short Circuit is fully functional and could be used without damage.

RPC-1.85

Short Circuit
Jack

08K12S-000S3

Declaration of calibration options

Factory Calibration

Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Accredited Calibration

Not available.

For further, more detailed information see application note AN001 on the Rosenberger homepage.

Calibration interval

Recommendation 12 months

Packing

Standard 1 pce in box
Weight 7.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
|------------------|----------|--------------|----------|------|---------------------------|------------------|----------|
| Herbert Babinger | 26/08/04 | Martin Moder | 24.03.15 | g00 | 14-1492 | Herbert Babinger | 24.03.15 |

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de

Page
3 / 3