



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


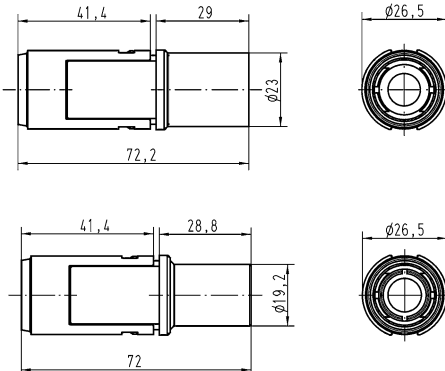

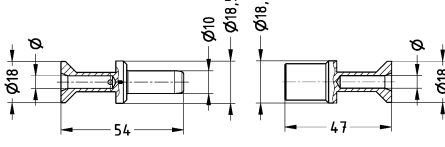

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



250 A 2.000 V 12 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han® HC Modular , Crimp termination  <p>Please order crimp contacts separately.</p>	10 ... 70	09 11 001 3021	09 11 001 3121	 <p>max. insulation diameter 18 mm</p>																												
TC 250 , Crimp contact, Contact surface: Silver plated 	10 16 25 35 50 70	09 11 000 6184 09 11 000 6185 09 11 000 6126 09 11 000 6127 09 11 000 6128 09 11 000 6129	09 11 000 6284 09 11 000 6285 09 11 000 6226 09 11 000 6227 09 11 000 6228 09 11 000 6229	 <table border="1" data-bbox="965 1243 1412 1444"> <thead> <tr> <th>Conductor cross-section</th> <th>Tool identification</th> <th>Stripping length A</th> <th>Ø</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>6</td> <td>22 mm</td> <td>4.3 mm</td> </tr> <tr> <td>16 mm²</td> <td>8</td> <td>22 mm</td> <td>8.5 mm</td> </tr> <tr> <td>25 mm²</td> <td>10</td> <td>19 mm</td> <td>7 mm</td> </tr> <tr> <td>35 mm²</td> <td>12</td> <td>22 mm</td> <td>8.45 mm</td> </tr> <tr> <td>50 mm²</td> <td>14</td> <td>22 mm</td> <td>10.25 mm</td> </tr> <tr> <td>70 mm²</td> <td>16</td> <td>22 mm</td> <td>11.75 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p> <p>Crimp zone acc. to DIN 46235</p>	Conductor cross-section	Tool identification	Stripping length A	Ø	10 mm ²	6	22 mm	4.3 mm	16 mm ²	8	22 mm	8.5 mm	25 mm ²	10	19 mm	7 mm	35 mm ²	12	22 mm	8.45 mm	50 mm ²	14	22 mm	10.25 mm	70 mm ²	16	22 mm	11.75 mm
Conductor cross-section	Tool identification	Stripping length A	Ø																													
10 mm ²	6	22 mm	4.3 mm																													
16 mm ²	8	22 mm	8.5 mm																													
25 mm ²	10	19 mm	7 mm																													
35 mm ²	12	22 mm	8.45 mm																													
50 mm ²	14	22 mm	10.25 mm																													
70 mm ²	16	22 mm	11.75 mm																													
TC 250 , Crimp contact, PE contact 	16 35	09 11 000 6190 09 11 000 6104	09 11 000 6290 09 11 000 6204	