



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




5

4

3

2

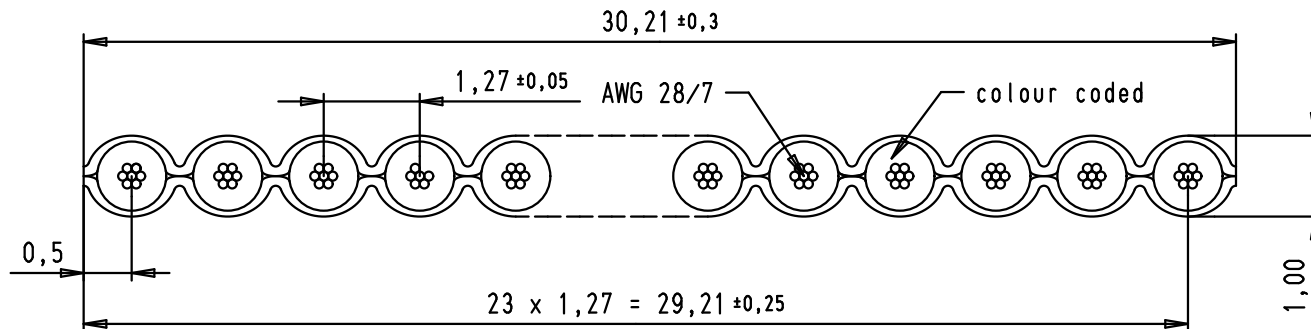

1



Wire _____ Cu tinned
 Gauge _____ AWG 28/7
 Voltage rating _____ 300 Vr.m.s
 Current (Max) _____ 2,1A
 Conductor resistance _____ 221 mΩ/m
 Capacity unbalanced _____ 42,7 pF/m
 Impedance unbalanced _____ 105 Ω
 Inductance unbalanced _____ 0,68 μH/m
 Signal delay _____ 4,9 ns/m
 Insulation material _____ PVC
 Temperature rating _____ | -20°C (operating) to 105°C
 _____ | -30°C (static)
 Flammability rating _____ UL: VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

| | | | | | | | | |
|---------|----------|------|---------|-------------------------------|------|---|---|----------------------|
| | | | | Dot. | Name |  All Dim. in mm Orig. Size DIN A 4 | SEK 18 Flat cable | Maßstab/ Scale |
| | | | Detail. | 20/10/05 | JMDR | | 24 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918 | 10:1 |
| | | | Insp. | | |  | TB 09 18 024 7005 | Blatt/ Page 1 / 1 |
| EC01446 | 22/02/10 | SC | Stand. | | | | | |
| 33990 | 14/05/07 | PK | | | | | | |
| 33246 | 20/10/05 | JMDR | | | | | | |
| | Mod. | Dot. | Name | HARTING EURL F-95972 Paris | | | | |