



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC	DIST	REVISIONS					
P	LTR	DESCRIPTION				DATE	APVD
						DWN	
	C	ECR-05-017969				09JAN06	JMS FWK

NOTES:

- 1

PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Ag PLATING
- 4

THIS ITEM MUST BE WHITE
- 5

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:DC — 1 GHz

NOMINAL IMPEDANCE:75 Ohm

INSULATION RESISTANCE:5000 MOhm

WORKING VOLTAGE:500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE:1500 Volts RMS Max

CONTACT RESISTANCE:

CENTRE CONTACT:1.50 mOhm Max

OUTER CONTACT:0.20 mOhm Max

VSWR @ xGHz:N/A

INSERTION LOSS xdb:TBA
- 6

MECHANICAL CHARATERISTICS


COUPLING RETENTION FORCE:445N

CABLE RETENETION FORCE:N/A




DURABILITY:500 Cycles Min
- 7

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:-65 to +165 DegC

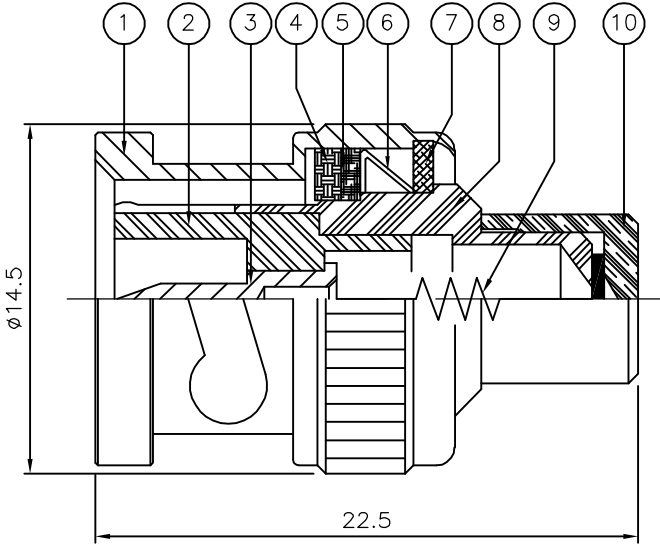

		1	1	BRASS	3	CAP	10
		1	1	1/2W-75 OHM		RESISTOR	9
		1	1	BRASS	3	BODY	8
		1	1	BRASS	3	WASHER	7
		1	1	SPRING STEEL		SPRING	6
		1	1	BRASS	3	RETAINING RING	5
		1	1	SILICON RUBBER	4	GASKET	4
		1	1	BRASS	3	CONTACT	3
		1	1	PTFE		INSULATION	2
		1	1	BRASS	3	SHELL	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM

				
QUANTITY PER ASSY				PARTS LIST
				Tyco Electronics Corporation Bideford EX39 4HE
NAME				
BNC PLUG TERMINATION 75 OHM — —				
SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
A3	00779	C-1337470		—
		SCALE	SHEET	REV
		NTS	1 OF 1	C

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -
MATERIAL SEE TABLE	