imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TENSILITY

part number: description:

10-01116 Cable, 915 mm, 4.75x1.7 mm 50-00333 dc jack to stripped tinned, 24 AWG, 30-00003 wire date: January 18, 2013 rev: A1 page: 1 of 2


Specifications:

connector description	dc jack, 4.75x1.7x17.5 mm, molding style, P/N 50-00333	
overmold	jack, 6.5 mm, 11 mm, Tensility, P/N 24-00004	
strain relief	jack, 24 AWG, 3.6 mm, flat, P/N 23-00010	
wire description	2C, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 65P, P/N 30-00003	
cable outer diameter	Ø3.6 mm	
cable color	black	
cable length	915 ± 50 mm	
rated current	4 A, 12 Vdc	

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

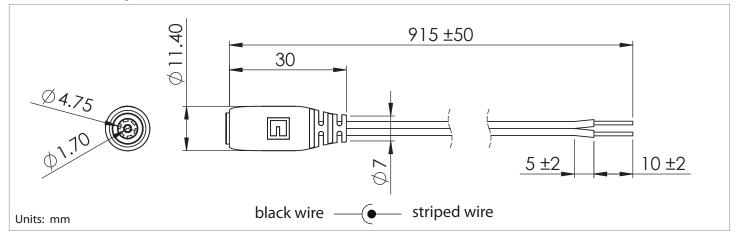

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial

Date



10-01116 Cable, 915 mm, 4.75x1.7 mm 50-00333 dc jack to stripped tinned, 24 AWG, 30-00003 wire

date: January 18, 2013 rev: A1 page: 2 of 2

Date	Description
June 27, 2012	initial release
January 18, 2013	updated connector to 50-00333, overmold and strain relief

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title
Name	Date
Company	Branch