



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TEMP-FLEX

a **molex** company

INSULATION DISPLACEMENT CABLE:
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

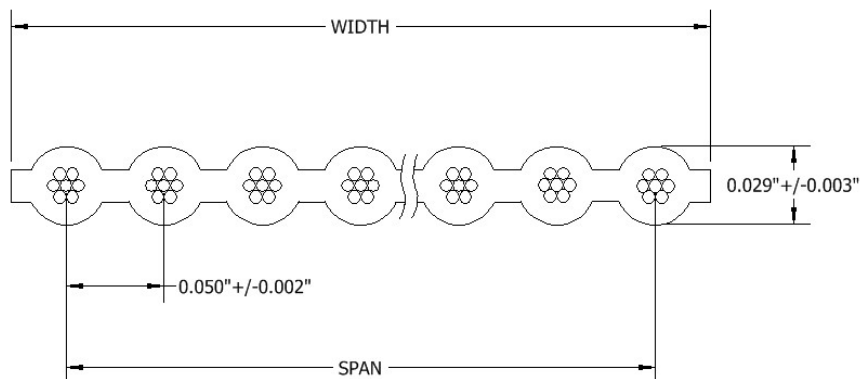

Cond. No.	Part Number	Span	Width
6	1000570030	0.250 +/- 0.005"	0.300 +/- 0.007"
10	1000570031	0.450" ± 0.007"	0.500" ± 0.007"
12	1000570147	0.550" ± 0.007"	0.600" ± 0.007"
14	1000570151	0.650" ± 0.007"	0.700" ± 0.007"
15	1000570032	0.700" ± 0.007"	0.750" ± 0.007"
16	1000570033	0.750" ± 0.007"	0.800" ± 0.007"
20	1000570034	0.950" ± 0.010"	1.000" ± 0.010"
24	1000570169	1.150" ± 0.010"	1.200" ± 0.010"
25	1000570035	1.200" ± 0.010"	1.250" ± 0.010"
26	1000570036	1.250" ± 0.010"	1.300" ± 0.010"
30	1000570182	1.450" ± 0.010"	1.500" ± 0.010"
34	1000570037	1.650" ± 0.010"	1.700" ± 0.010"
37	1000570190	1.800" ± 0.010"	1.850" ± 0.010"
40	1000570038	1.950" ± 0.010"	2.000" ± 0.010"
50	1000570039	2.450" ± 0.010"	2.500" ± 0.010"
60	1000570040	2.950" ± 0.015"	3.000" ± 0.015"
64	1000570215	3.150" ± 0.015"	3.200" ± 0.015"

CHARACTERISTICS		
Conductor	28 AWG, 7/36, Silver Plated Copper	
Insulation	FEP	
Color	Blue with Blue Polarity Stripe	
Impedance (ohms)	115 Unbalanced	165 Balanced
Capacitance (pF/ft)	10.5 Unbalanced	6.0 Balanced
Inductance (uH/ft)	0.14 Unbalanced	0.16 Balanced
Insulation Resistance (Mohm)	>500	
Voltage Rating	300V	
Temperature Rating	200C	

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424