



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

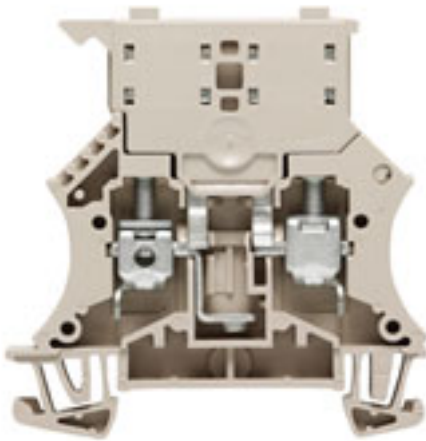

The fuse terminals of the Weidmüller W Series are available in two different forms:

- Fuse terminal with pivoting retaining lever
- Fuse terminal with plug-in SIHA fuse holder

General ordering data

Order No.	1011000000
Type	WSI 6
Version	W-series terminal with clamping yoke connection, Fuse terminal, Rated cross-section: 6 mm ² , Screw connection
EAN	4008190105624
Qty.	50 pc(s).

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Dimensions

Length	60 mm	Width	7.9 mm
Height	61 mm	Height of lowest version	62 mm
Weight	19.4 g		

Temperatures

Operating temperature	-50 °C...+120 °C	Storage temperature	
-----------------------	------------------	---------------------	--

CSA ratings data

Certificate No. (CSA)	200039-1057876	Voltage size B (CSA)	30 V
Voltage size C (CSA)	30 V	Voltage size D (CSA)	30 V
Current size B (CSA)	10 A	Current size C (CSA)	10 A
Current size D (CSA)	10 A	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	20 AWG		

UL ratings data

Certificate No. (UR)	E60693VOL1SEC38	Voltage size C (UR)	600 V
Current size C (UR)	9.5 A	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	20 AWG	Conductor size Field wiring max. (UR)	8 AWG

Material data

Material	Wemid	Colour	dark beige
Flammability class UL 94	V-0		

System specifications

Product family	W-series terminal with clamping yoke connection	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

Additional technical data

Explosion-tested version	No	Number of identical terminals	1
Open sides	right	Type of mounting	Snap-on

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min. 0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 6 mm ²
---	---

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Type of connection	Screw connection	Stripping length	12 mm
Blade size	4.0 x 0.8 mm	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	0.5 mm ²
Clamping range, rated connection, max.	10 mm ²	Clamping screw	M 3.5
Tightening torque, min.	0.8 Nm	Tightening torque, max.	1.6 Nm
Torque setting with DMS electric screwdriver 3		Gauge to IEC 60947-1	A5
Conductor cross-section, solid, min.	0.5 mm ²	Wire connection cross section, solid core max. rated connection	10 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	10 mm ²
Wire connection cross section, finely stranded, max.	10 mm ²	Conductor cross-section, flexible, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	6 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	6 mm ²
Wire connection cross section AWG, min.	AWG 20	Wire connection cross section AWG, max.	AWG 8

Display element

Operating voltage for display, max.	500 V	Type of voltage for indicator	AC/DC
-------------------------------------	-------	-------------------------------	-------

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Display	Without LED
Fuse holder (cartridge holder)	Pivoting	Operating voltage, max.	500 V
Type of voltage for indicator	AC/DC		

Rating data

Rated cross-section	6 mm ²	Rated voltage to adjoining terminal	500 V
Rated impulse withstand voltage	6 kV	Rated current	6.3 A
Current at maximum wires	6.3 A	Standards	IEC 60947-7-3
Pollution severity	3		

Classifications

ETIM 2.0	EC000899	ETIM 3.0	EC000899
ETIM 4.0	EC000899	UNSPSC	30-21-18-11
eClass 4.1	27-14-11-16	eClass 5.1	27-14-11-16
eClass 6.0	27-14-11-16		

Approvals

Approvals	BURVER; CE; CSA; DET NORVER; GERMLLOYD; GOSTME25; KEMAKEUR; LLOYDSREG; MARITREG; NEMKO; RINA; UR
-----------	---

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data**Product notes**

Note, ordering data	Max. power loss (1.6 W) at the cartridge fuse limits the rated current.
Note, technical data	Fuse inserts or contact sleeves should be attached in the middle; variant with contact sleeve order number 1028200000 (Qty. 50/11A) wire connection H07V-K10. H07V-R10 and AWG 8/7 with 1.4 Nm tightening torque
Note, accessories	Screw M3 x 5 order No. 1052100000 for QL 2 - QL 10.
Product description	400V

Downloads

STEP	1011000000_09406_WSI_6_STP.stp
3D model	

Datasheet

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

