



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



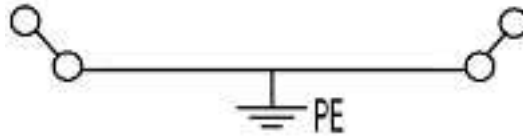

#### General ordering data

Order No.	1016500000
Part designation	WPE 1.5/ZZ
Version	Earth terminal, 1.5 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
EAN	4008190170738
Qty.	100 pc(s).

#### Product notes

Product description	Their small size compared to the respective rated cross-section makes the modular terminals with the compact design very popular.
Note, accessories	Rail support for insulated installation of terminal rail "SH 2" order no. 0494920000 (10 pcs)

#### PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA98ATEX1685U
Download, German	KEMA98ATEX1685U_d.pdf
Download English	KEMA98ATEX1685U_e.pdf
IECEEx Certificate of Conformity	IECEXULD05.0008U
Download	IECEXULD05.0008U_e.pdf
ATEX conductor cross-section	1.5 mm <sup>2</sup>
IECEEx conductor cross-section	1.5 mm <sup>2</sup>
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

#### Additional technical data

Colour of insulating material	green/yellow
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35

#### Additional technical data

Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	4
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Screwed
UL 94 flammability rating of insulation material	V-0
Version	PE terminal

#### CSA rating data

Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 14

#### Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	4
Stripping length	7 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.6 Nm
Torque level with DMS electric screwdriver	1
Gauge to IEC 60947-1	A1
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	2.5 mm <sup>2</sup>
Stranded, min.	1.5 mm <sup>2</sup>
Stranded, max.	2.5 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	1.5 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	1.5 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	1.5 mm <sup>2</sup>
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 12
AWG conductor size, min.	0.13 mm <sup>2</sup>
AWG conductor size, max.	3.31 mm <sup>2</sup>

#### Dimensions

Width	5.1 mm
Height of lowest version	47 mm
Length	60 mm

#### Dimensions

TS 35 offset 32 mm

#### Disconnect terminals

Torque level with DMS electric screwdriver 1

#### PE rating data

Centre screw on PE terminals M 2.5  
 PEN function No  
 Pollution severity 3  
 Rated cross-section 1.5 mm<sup>2</sup>  
 Rated impulse withstand voltage to adjacent terminal 8 kV  
 Rated short-time current 180 A (1,5 mm<sup>2</sup>)  
 Rated voltage for adjacent terminal 800 V  
 Standards IEC 60947-7-2  
 Tightening torque range for fixing screw 0.4...0.6 Nm  
 Torque level with DMS electric screwdriver 1

#### UL rating data

Min. cross-section (UL) AWG 26  
 Max. cross-section (UL) AWG 14

#### Approvals

Approvals institutes



#### Downloads

STEP 1016500000\_18880\_WPE\_1.5-ZZ\_STP.stp

#### Classifications

eClass 4.1 27-14-03-05  
 eClass 5.0 27-14-03-05  
 eClass 5.1 27-14-03-05

#### Similar products

Order No.	Part designation	Version
1036300000	WDK 2.5PE	Earth terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, green, TS 35

101000000	WPE 2.5	Earth terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101640000	WPE 2.5/1.5/ZR	Earth terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101010000	WPE 4	Earth terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
190513000	WPE 4/ZZ	Earth terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
190512000	WPE 4/ZR	Earth terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101020000	WPE 6	Earth terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101030000	WPE 10	Earth terminal, 10 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
104250000	WPE 10/ZR	Earth terminal, 10 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101040000	WPE 16	Earth terminal, 16 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101050000	WPE 35	Earth terminal, 35 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
103730000	WPE 70/95	Earth terminal, 95 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35
101970000	WPE 120/150	Earth terminal, 120 mm <sup>2</sup> , Screw connection, Wemid, green/yellow, TS 35