

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









(images/product/BeagleBone Black Rev.C.jpg)

Embest BeagleBone Black Rev.C - Single-board Computer SKU: 102110001

BeagleBone Black Rev.C is a development kit based on an AM335x processor which integrates an ARM Cortex™-A8 core operating at up to 1GHz and has abundant peripheral devices. BB Black provides lots of expansion interfaces such as Ethernet, USB host and OTG, TF card, serial, JTAG (no connector by default), HDMI D type, Emmc, ADC, I2C, SPI, PWM and LCD. Embest BeagleBone Black Rev.C is designed to satisfy the different requirements of various fields including game devices, home and industrial automation, consumer medical devices, printers, intelligent tolling systems, weighing systems of intelligent vending machine, educational terminals and high-end toys.

Hardware Features

General Specifications:

- Dimensions: 86.36 mm×54.61mm
- Operation Temperature: 0 ~ 70 $^{\circ}$ C
- Operating Humidity: 20% ~ 90% (Non-Condensing)
- Power Supply: 5V/0.35A

• AM335x Processor:

- Integrating 1GHz ARM Cortex™-A8 core
- Integrating NEON™ SIMD coprocessor
- Integrating SGX530 graphics engine
- Integrating programmable real-time unit subsystem
- Integrating 32KB instruction buffer and 32KB data buffer with single-error detection (parity)
- Integrating 256KB L2 cache with error-check code

· On-Board Memories:

- 4GB 8-bit eMMC on-board flash storage (rev. 3)
- 512MB DDR3 SDRAM


On-Board Interfaces:

- 1 HDMI D type interface (16-bit color with audio output)
- 1 LCD interface (24-bit output, extended by P8 interface)
- 1 10/100M Ethernet (RJ45 connector)
- 1 high-speed USB 2.0 OTG interface with PHY (Mini USB type-B connector)
- 1 high-speed USB 2.0 HOST interface with PHY (USB type-A connector)
- 1 TF card slot (SD/MMC)
- 1 3-line debugging serial interface (6-pin 2.54-pitch connector)
- 1 HDMI type-D interface
- 1 expansion interface for LCD, UART, eMMC, ADC, I2C, SPI and PWM
- 1 JTAG interface (optional item, 20-pin standard interface, no connector mounted by default)

· Buttons & LEDs:

- 1 boot device selection button
- 1 power button
- 1 reset button
- 1 LED power indicator
- 4 user custom indicators

System Block Diagram

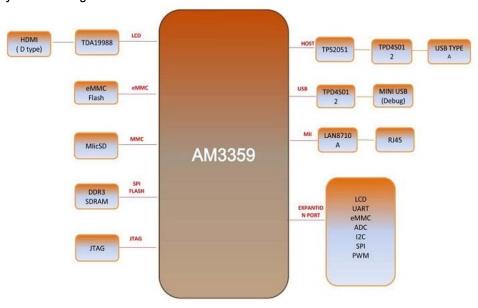

Software Features

Software reactives		
Items		Notes
OS		Debian, Angstrom, Ubuntu, Android
Device Driver	Uart	Uart Driver
	Ehternet	10/100 IEEE1588
	Display	HDMI Driver
	mmc/sd	SD 2.0 /eMMC Driver
	USB	High speed USB Host Driver
	Led	User LED Driver

- Supported by Debian system for element14 BeagleBone Black(Rev C) and shipped with drivers and source code
- Supported by TISDK system for element14 BeagleBone Black(Rev C) and shipped with drivers and source

For more information, please click here (http://www.embest-tech.com/shop/star/element14-beagleboneblack-rev-c.html).

Overview



Designer: Embest (http://www.embesttech.com) Other Products From

This Designer (http://www.seeedstudio.com/depot/Embest-m-111.html?ref=pinfo) Weight: 123 g