



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED. METRIC UNITS SHOWN IN PARENTHESES ARE APPROXIMATE EQUIVALENTS IN MILLIMETERS AND ARE FOR INFORMATION ONLY.

CHARACTERISTIC IMPEDANCE	77 ± 5 ohms, Method C at 1 MHz
CAPACITANCE, MUTUAL	30 pF/ft (maximum)
ATTENUATION	1.0 db/100 ft. (nominal) at 1 MHz 1.4 db/100 ft. (maximum) at 1 MHz

CONDUCTORS
AWG 24, 19 Strands of
AWG 36, Silver-Coated
High Strength Copper
Alloy

DIELECTRICS
Radiation-Crosslinked
Modified ETFE
Light Blue/White
Permittivity -
2.7 (nominal)

ADDITIONAL REQUIREMENTS


COMPONENT WIRE PRIOR TO CABLING (Per MIL-W-22759)

ACCELERATED AGING (Per MIL-W-22759 Life Cycle Procedure)	300 ± 3°C for 7 hours, .500 in. mandrel, .375 lb 2.5 kV dielectric test
COLD BEND	-65 ± 2°C for 4 hours, .750 in. mandrel, 1.00 lb 2.5 kV dielectric test
SHRINKAGE	200 ± 3°C for 6 hours, .125 in. (maximum) in 12 in.
INSULATION RESISTANCE	5000 MΩ for 1000 ft. (minimum)
TENSILE STRENGTH	5000 psi (minimum)
ELONGATION	50% (minimum)
IMPULSE DIELECTRIC TEST	8.0 kV (peak), 100% test

FINISHED CABLE (Per MIL-C-27500)

BLOCKING	200°C for 6 hours
COLD BEND	-65 ± 2°C for 4 hours, 3 in. mandrel
THERMAL SHOCK	300 ± 5°C for 6 hours, 1.25 in. mandrel
FLAMMABILITY (Per Raychem Spec 55A, Procedure 1)	3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue
WEIGHT	14.2 lbs/1000 ft. (maximum)
SHIELD COVERAGE	90% (minimum)
JACKET FLAWS	1000 volts, 60 Hz, 100% test
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms)(minimum)
WALL THICKNESS	.008 inch (nominal)
TENSILE STRENGTH	5000 psi (minimum)
ELONGATION	50% (minimum)

The length of lay shall be .75 inches (minimum) to 1.25 inches (maximum).

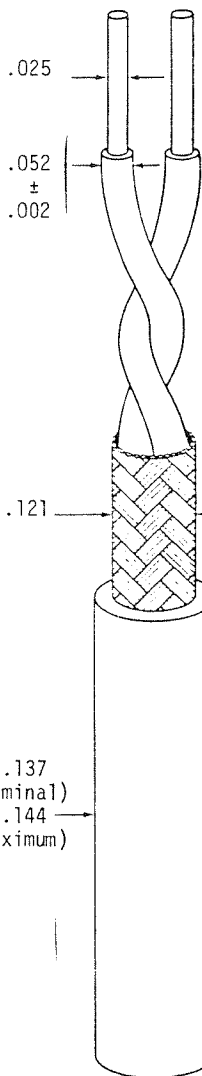

SHIELD
AWG 38, Tin-Coated
Copper

JACKET
Radiation-Crosslinked
Modified ETFE
White

(†) Designate outer jacket color with a dash number in accordance with MIL-STD-681.