



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## RSM-Series RSM 8RS 115VUC LP

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

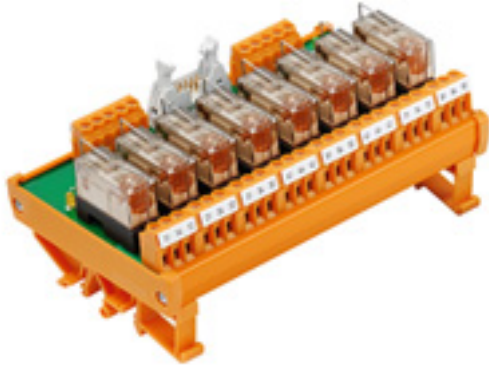

Clip-on RS 30. 31. 32 relay bases are available in widths from 11.2 to 25 mm, depending on the type.

The RSM relay multiplexers are available as 4, 8 and 16-way modules. To reduce the wiring work, the DC variants are fitted with a common plus or minus potential. The optional IEC603-1 plug-in connector enables the connection of pre-assembled lines.

The screw connection system is used to connect the conductor with a rated cross-section of 2.5 mm<sup>2</sup>.

### General ordering data

Order No.	<a href="#">1114661001</a>
Type	RSM 8RS 115VUC LP
Version	RSM-Series, Relays, No. of contacts: 1, CO contact, AgNi 90/10, Rated control voltage: 115 V AC / DC, Continuous current: 6 A, Screw connection
GTIN (EAN)	4032248047840
Qty.	1 pc(s).

**RSM-Series**  
**RSM 8RS 115VUC LP**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Ratings**

Conductor connection system	Screw connection	Humidity	40 °C / 93 % rel. humidity, no condensation
Wire cross-section, solid, max.	2.5 mm <sup>2</sup>		

**Dimensions and weights**

Width	145 mm	Height	87 mm
Depth	76 mm	Net weight	352 g

**Temperatures**

Operating temperature	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------	-----------------	---------------------	-----------------

**Connection data**

Clamping range, rated connection	2.5 mm <sup>2</sup>	Clamping range, rated connection, min.	0.5 mm <sup>2</sup>
Clamping range, rated connection, max.	4 mm <sup>2</sup>	Stripping length, rated connection	8 mm
Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>		

**Input**

Rated control voltage	115 V AC / DC	Rated current DC	6 A
Power rating	0.6 VA	Status indicator	LED yellow

**Output**

Max. switching voltage, AC	250 V	Continuous current	6 A
making current	8 A	Max. switching power	2000 VA
Switch-on delay	≤ 8msdc/10msac	Switch-off delay	≤ 5msdc/8msac
Duration of Bounce	≤ 3 ms	Min. switching power	250 mW
Max. switching frequency at rated load	0.1 Hz		

**Contact specifications**

No. of contacts	1	Contact design	CO contact
Contact material	AgNi 90/10	Mechanical service life	30 x 10 <sup>6</sup> switching cycles
Electrical service life of AC coil	> 7x10 <sup>3</sup> Switching cycles	Electrical service life, DC coil	> 5x10 <sup>5</sup> switching cycles

**Insulation coordination**

Rated voltage	250 V	Clearance and creepage distances for control side - load side	> 3 mm
Impulse withstand voltage	4 kV	Protection degree	IP 20
Pollution severity	2	Surge voltage category	III

**Other technical data**

Version	Relay coupler	Status indicator	LED yellow
Free-wheel diode	No		

**Further details of approvals / standards**

Standards	DIN EN 50178
-----------	--------------

Creation date March 7, 2013 6:04:26 PM CET

**RSM-Series  
RSM 8RS 115VUC LP**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

**Approvals**

Approvals

**Downloads**Declaration of Conformity [K34\\_05\\_10.pdf](#)