



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 1126 Multi-Stacking Banana Plug To Stacking Pin Tip Plug

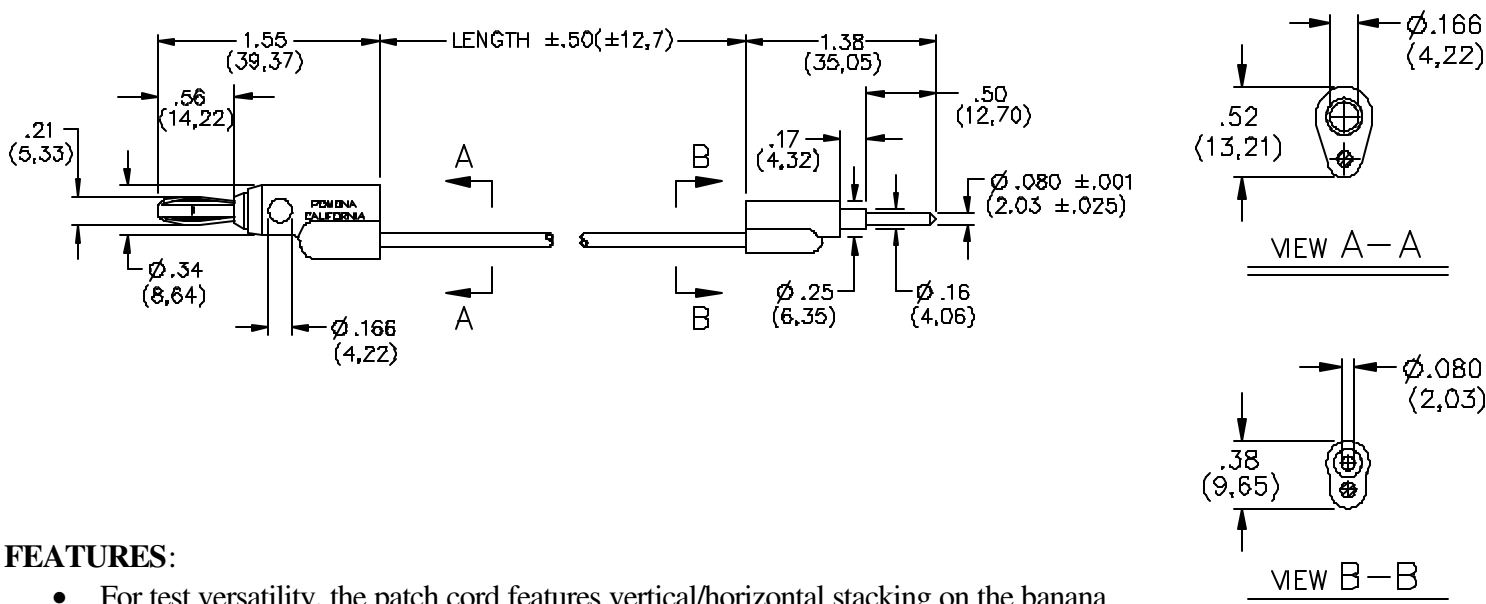

FEATURES:

- For test versatility, the patch cord features vertical/horizontal stacking on the banana plug and vertical stacking on the pin tip side.
- Patch cord converts a pin tip jack to a banana plug or a banana jack to a pin tip plug.
- Banana and Pin Tip Plugs are molded directly to the wire for long life.

MATERIAL:

Banana Plug: Spring – Beryllium Copper, Nickel Plated

Body: Brass, Nickel Plated

Insulation: Polypropylene, Color matches wire

Wire: 20 AWG, Stranding 41 x 36 Tinned Copper, PVC Insulated, .087" (2.21mm) O.D.

Color per part number. Marking: MODEL 1126-*

Pin Tip Plug: Body – Brass, Gold Plated

Stackup Spring: Beryllium Copper, Gold Plated

Insulation: Polypropylene, Color matches wire

RATINGS:

Voltage: Hand-held Testing: 30VAC/60VDC MAX.

Hands Free Testing in Controlled Voltage environments: 3000 WVDC

Operating Temperature: +55°C (+131°F)

Current: 5 Amperes Max.

ORDERING INFORMATION: Model 1126-X-*

X = Length, Standard Lengths: 4" (10,16cm), 8" (20,32cm), 12" (30,48cm), 18" (45,72cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92), & 60" (152,40cm). Custom lengths can be quoted upon request.

* = Color, -0 Black, -2 Red. Ordering Example: 1126-24-2 Patch cord will be 24" (60,96cm), color red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA