



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**W-Series, WeiCoS
WDT 2.5 AT**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

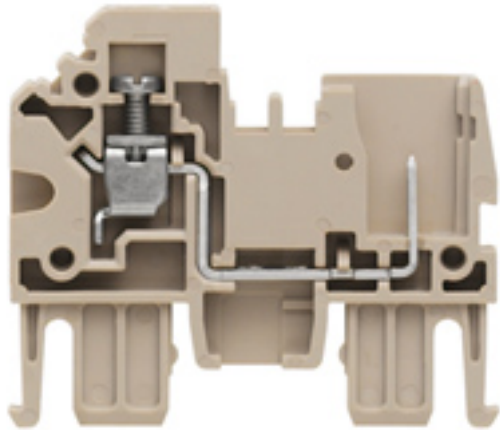

The versatile and extensive range of products - from 0.05 mm² to 300 mm² - means that you have diverse options for your applications at your disposal.
Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

General ordering data

Order No.	1305320000
Type	WDT 2.5 AT
GTIN (EAN)	4050118104363
Qty.	50 pc(s).

**W-Series, WeiCoS
WDT 2.5 AT**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Net weight 4.439 g

Temperatures

Operating temperature	Storage temperature
Continuous operating temp., min. -50 °C	Continuous operating temp., max. 120 °C

Additional technical data

Open sides	Version	1 plug-in connection - 1 plug-in connection - 1 adapter connection, for plug-in cross-connector, One end without connector
right		

Clampable wires (rated connection)

Type of connection	Screw connection	Type of connection 2	Plug-in connection
Stripping length	7 mm	Blade size	0.6 x 3.5 mm
Connection direction	on side	Number of connections	1
Clamping range, rated connection, min.	0.13 mm ²	Clamping range, rated connection, max.	4 mm ²
Clamping screw	M 2.5	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Gauge to IEC 60947-1	A4
Wire connection cross section, solid core, max. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Rated data

Rated cross-section	2.5 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	24 A
Current at maximum wires	27 A	Standards	IEC 60947-7-1, IEC 61984
Pollution severity	3		

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**W-Series, WeiCoS
WDT 2.5 AT**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

System specifications

Product family	W-Series, WeiCoS	Type of connection	Screw connection
Type of connection 2	Plug-in connection	Connection direction	on side
Number of levels	1	Number of connections	1
No. of clamping points per level	1	Number of potentials per level	1
End cover plate required	Yes		

Classifications

eClass 6.2	27-14-11-20	eClass 7.1	27-14-11-20
------------	-------------	------------	-------------