



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Control cabinet feed-through - VS-BH-M12FS-8CON-RJ45/180 - 1405060

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Control cabinet feed-through, M12, 8-pos., A-coded on RJ45 socket, socket input 180°, IP65/67

## Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 295 (PC-2011)
GTIN	 4 046356 298551
Custom tariff number	85366990
Country of origin	GERMANY

## Technical data

### Mechanical characteristics

Number of positions	8
Shielded	Yes
Insertion/withdrawal cycles	≥ 100
Color	black
Ambient temperature (operation)	-25 °C ... 85 °C

### Material data

Inflammability class according to UL 94	V0
Housing material	PA
Contact material	Copper alloy
Degree of protection	IP65/67

### Electrical characteristics

Number of positions	8
Nominal voltage UN	50 V
Nominal current IN	1 A
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1 A

# Control cabinet feed-through - VS-BH-M12FS-8CON-RJ45/180 - 1405060

## Classifications

### eclass

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103

### etim

ETIM 3.0	EC002061
ETIM 4.0	EC002061

### unspsc

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Approvals

### Approvals

---

Approvals

GOST

---

Ex Approvals

---

Approvals submitted

---


### Approval details




## Drawings

# Control cabinet feed-through - VS-BH-M12FS-8CON-RJ45/180 - 1405060

Dimensioned drawing



Dimensioned drawing

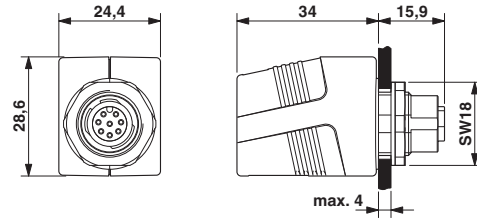

Panel cutout

---

© Phoenix Contact 2012 - all rights reserved  
<http://www.phoenixcontact.com>