



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Flush-type socket - VS-FSBPYS-OE-94H/0,5 SCO - 1407504

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Hybrid flush-type socket, Ethernet, 8-pos., M12-SPEEDCON, rear/screw mounting with M16 thread, 360° shield connection with connected shielded hybrid cable

M12 panel feed-through, rear mounting



Ethernet



Key commercial data

Packing unit	1 1
Minimum order quantity	30 1
Custom tariff number	85444290
Country of origin	Germany

Technical data

Dimensions

Length of cable	0.5 m
-----------------	-------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP67

General

Rated current at 40°C	6 A (Power) 0.5 A (Data)
Rated voltage	30 V (Power and data)
Number of positions	8
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Coding	Y - hybrid
Surge voltage category	III

Flush-type socket - VS-FSBPYS-OE-94H/0,5 SCO - 1407504

Technical data

General

Pollution degree	3
Insertion/withdrawal cycles	≥ 100

Material

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PPA
Material	Zinc die-cast (nickel-plated)
Sealing material	FKM

Cable

Cable type	Ethernet hybrid
Cable structure	2x2xAWG26+1x4xAWG20
Conductor cross section	0.15 mm ² 0.6 mm ²
AWG signal line	26
AWG power supply	20
Conductor structure signal line	4x 1.05 mm
Conductor structure, voltage supply	4x 1.40 mm
Core diameter including insulation	1.05 mm
Wire colors	Ethernet: white/orange-orange, white/green-green Power: white, blue, brown, black
External sheath, color	Black RAL 9005
External cable diameter	7.60 mm
Smallest bending radius, movable installation	min. 110 mm
Outer sheath, material	PUR mixture halogen-free
Conductor material	Bare Cu litz wires
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Wave impedance	100 Ω ± 15 Ω (At an ambient temperature of 20°C)
Test voltage Core/Core	1.5 kV AC (Core - core)
Test voltage Core/Shield	1.5 kV AC (core-shield)
Ambient temperature (operation)	-40 °C ... 90 °C (fixed routing) -30 °C ... 70 °C (Flexibly installed)

Classifications

eCl@ss

eCl@ss 4.0	27060306
------------	----------

Flush-type socket - VS-FSBPYS-OE-94H/0,5 SCO - 1407504

Classifications

eCl@ss

eCl@ss 4.1	27060306
eCl@ss 5.0	27060300
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27449001

ETIM


ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	39121413


Drawings

Schematic diagram



Pin assignment M12 socket, 8-pos.

Dimensioned drawing

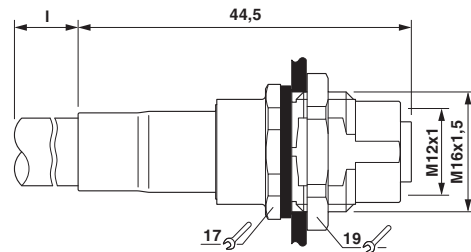

M12 flush-type socket, rear mounting, M16 fastening thread