



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		E	REVISED PER ECO-10-013617	26JUL10	HMR	CR

MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINALS: BRIGHT TIN OVER COPPER ALLOY.
SCREWS: #6-32 STEEL, ZINC PLATING W/ CLEAR CHROMATE, EXCEPT WHERE NOTED.

ELECTRICAL:
CURRENT RATING UL/CSA:
CLASS C: 20A,300V.
CLASS D: 5A,600V.
WIRE RANGE: 12-22 AWG


MECHANICAL:
RECOMMENDED TORQUE: 7 IN-LB.
OPERATING TEMP.: 105°C MAX.

- 1 SPECIAL PACKAGING.
- 2 SCREWS: 6-32 BRASS, NICKEL PLATED.

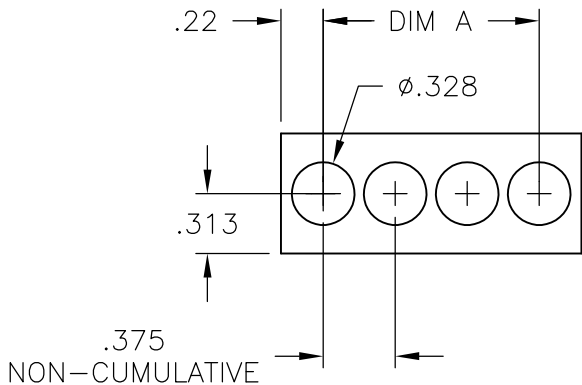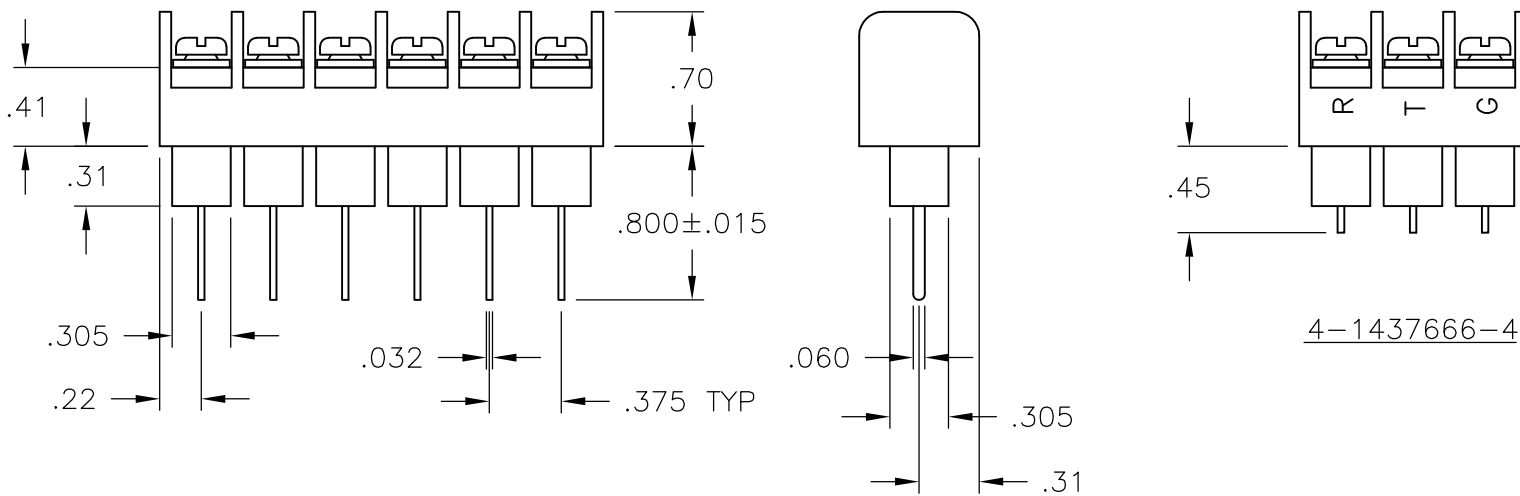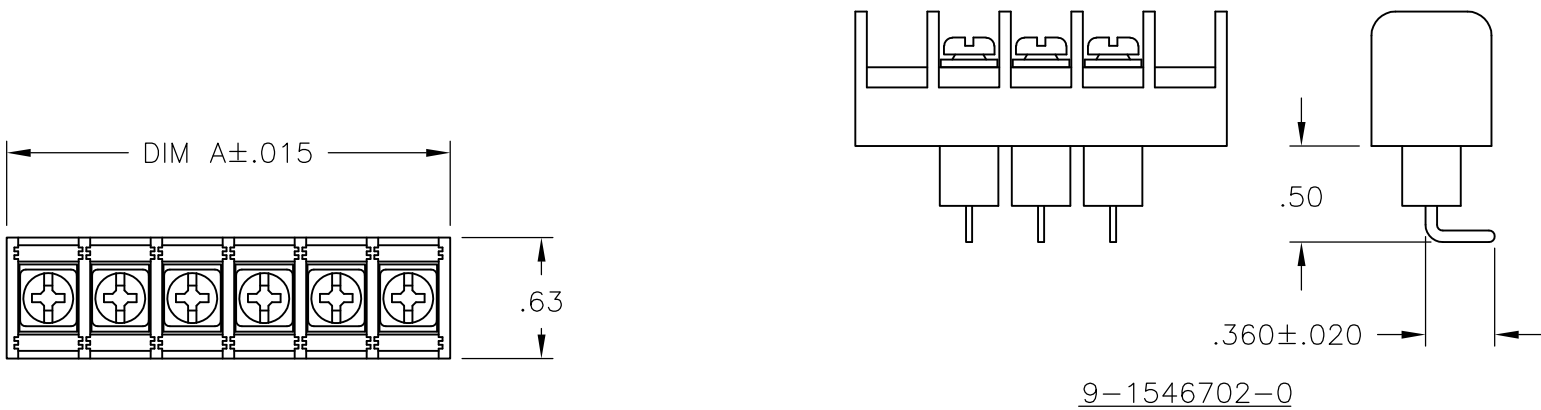

MOUNTING PANEL LAYOUT

9.436	25	JC6-W408-25	2-1546702-1
9.061	24	JC6-W408-24	2-1546702-0
8.686	23	JC6-W408-23	1-1546702-9
8.311	22	JC6-W408-22	1-1546702-8
7.936	21	JC6-W408-21	1-1546702-7
7.561	20	JC6-W408-20	1-1546702-6
7.186	19	JC6-W408-19	1-1546702-5
6.811	18	JC6-W408-18	1-1546702-4
6.436	17	JC6-W408-17	1-1546702-3
6.061	16	JC6-W408-16	1-1546702-2
5.686	15	JC6-W408-15	1-1546702-1
5.311	14	JC6-W408-14	1-1546702-0
4.936	13	JC6-W408-13	1546702-9
4.561	12	JC6-W408-12	4-1437666-6
4.186	11	JC6-W408-11	1546702-8
3.811	10	JC6-W408-10	1546702-7
3.436	9	JC6-W408-09	1546702-6
3.061	8	JC6-W408-08	1546702-5
2.686	7	JC6-W408-07	1546702-4
2.311	6	JC6-W408-06	1546702-3
1.936	5	JC6-W406-05	3-796985-7
1.936	5	JC6-W408-05	1546702-2
1.561	4	JC6-W406-04	3-796985-6
1.561	4	JC6-W408-04	4-1437666-5
1.936	3	JC6-W408-03-237	9-1546702-0
1.186	3	JC6-W408-03-147	4-1437666-4
1.186	3	JC6-W408-03	4-1437666-3
.811	2	JC6-W408-02	1546702-1
DIM A	NO. OF POS.	CATALOG NUMBER	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 5/27/03	 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK S. YODER 5/27/03	NAME JC6-W408-XX ASSEMBLY			
		APVD S. YODER 5/27/03				
		PRODUCT SPEC —				
		APPLICATION SPEC —				
MATERIAL —	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± -	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-4-1437666-3	RESTRICTED TO —
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV E	