



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved 



Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	130MT.KB	160MT.KB	Units
I_O	130 (160)	160 (200)	A
@ T_C	85 (62)	85 (60)	°C
I_{FSM}	1130	1430	A
@ 50Hz	1180	1500	A
@ 60Hz	6400	10200	A ² s
I^2_t	5800	9300	A ² s
@ 50Hz	64000	102000	A ² √s
@ 60Hz			
$I^2\sqrt{t}$			
V_{RRM} range	800 to 1600		V
T_{STG} range	- 40 to 150		°C
T_J range	- 40 to 150		°C

130-160MT..KB Series

Bulletin I27502 rev. A 05/03

International
 Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max. mA
130-160MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameter	130MT.KB	160MT.KB	Units	Conditions
I_O Maximum DC output current @ Case temperature	130 (160)	160 (200)	A	120° Rect conduction angle
	85 (62)	85 (60)	°C	
I_{FSM} Maximum peak, one-cycle forward, non-repetitive surge current	1130	1430	A	t = 10ms No voltage
	1180	1500		t = 8.3ms reapplied
	950	1200		t = 10ms 100% V_{RRM}
	1000	1260		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	64000	10200	A ² s	t = 10ms No voltage
	5800	9300		t = 8.3ms reapplied
	4500	7200		t = 10ms 100% V_{RRM}
	4100	6600		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	64000	102000	A ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.78	0.81	V	(16.7% x π x $I_{F(AV)} < I < \pi$ x $I_{F(AV)}$), @ T_J max.
$V_{F(TO)2}$ High level value of threshold voltage	0.99	1.04	V	($I > \pi$ x $I_{F(AV)}$), @ T_J max.
r_{f1} Low level value of forward slope resistance	4.59	3.52	mΩ	(16.7% x π x $I_{F(AV)} < I < \pi$ x $I_{F(AV)}$), @ T_J max.
r_{f2} High level value of forward slope resistance	4.17	3.13	mΩ	($I > \pi$ x $I_{F(AV)}$), @ T_J max.
V_{FM} Maximum forward voltage drop	1.63	1.49	V	$I_{pk} = 200A$, $T_J = 25^\circ C$, $t_p = 400\mu s$ single junction
V_{INS} RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$, all terminal shorted f = 50Hz, t = 1s

Thermal and Mechanical Specifications

Parameter	130MT.KB	160MT.KB	Units	Conditions
T_J Max. junction operating temperature range	-40 to 150		°C	
T_{stg} Max. storage temperature range	-40 to 150		°C	
R_{thJC} Max. thermal resistance, junction to case	0.16	0.12	K/W	DC operation per module
	0.93	0.73		DC operation per junction
	0.18	0.15		120° Rect conduction angle per module
	1.08	0.88		120° Rect conduction angle per junction
R_{thCS} Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque $\pm 10\%$ to heatsink to terminal	4 to 6		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	3 to 4			
wt Approximate weight	176		g	

130-160MT..KB Series

Bulletin I27502 rev. A 05/03



Outline Table (with optional barriers)

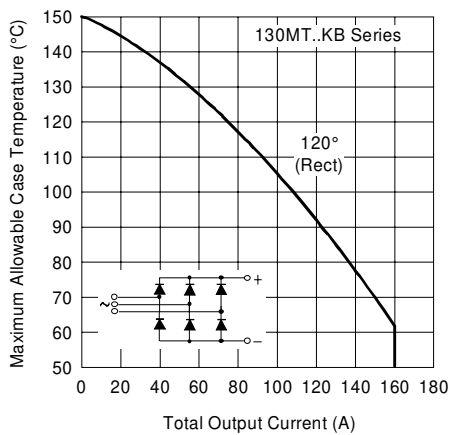
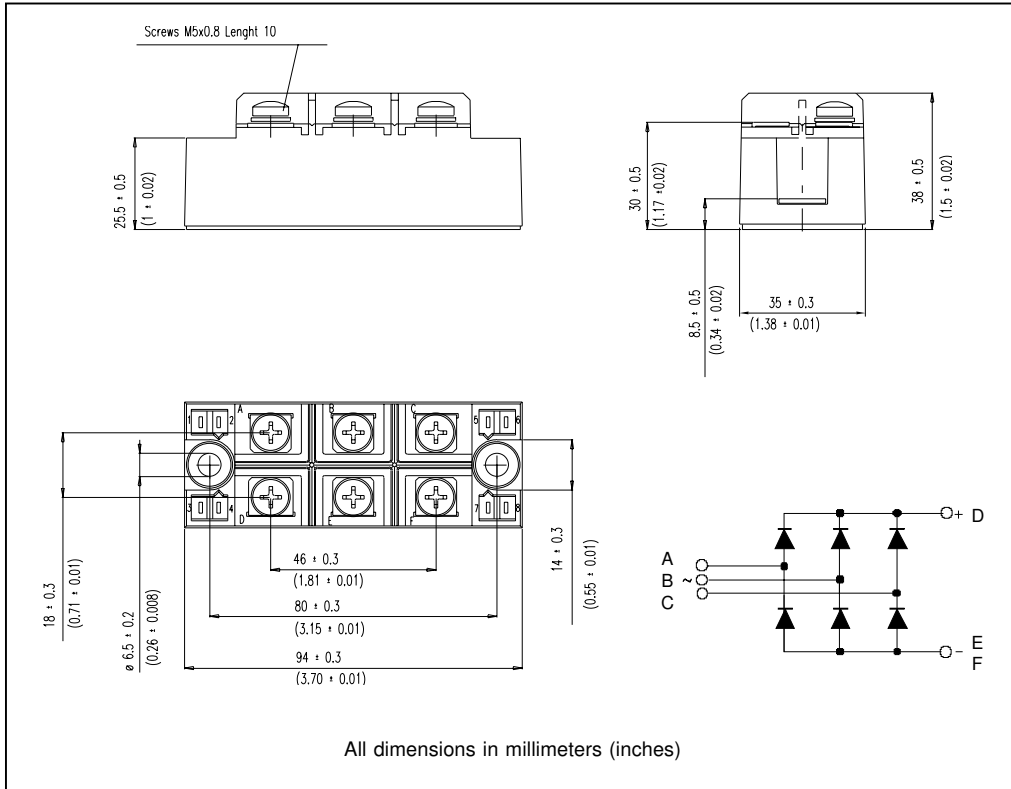


Fig. 1 - Current Ratings Characteristics

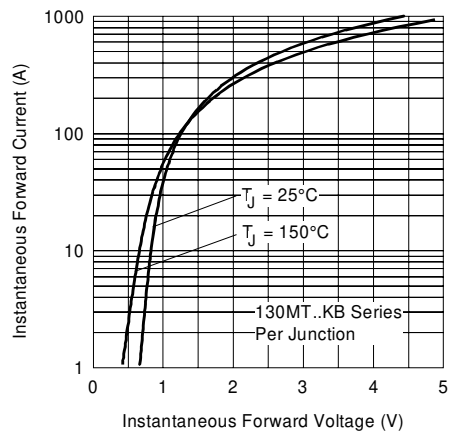


Fig. 2 - Forward Voltage Drop Characteristics

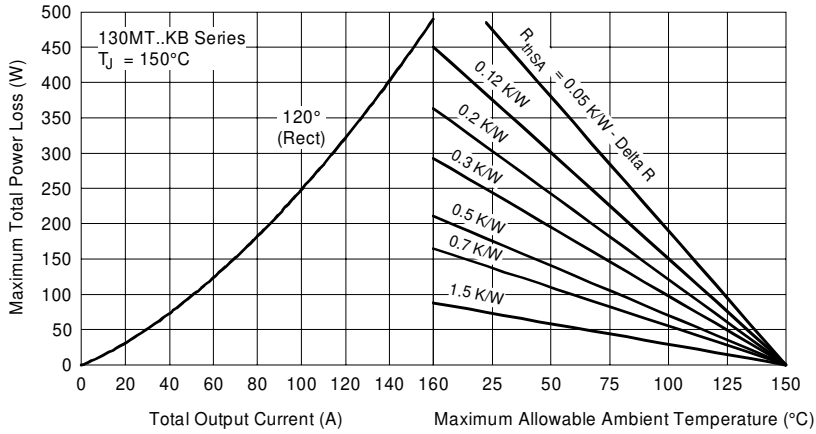


Fig. 3 - Total Power Loss Characteristics

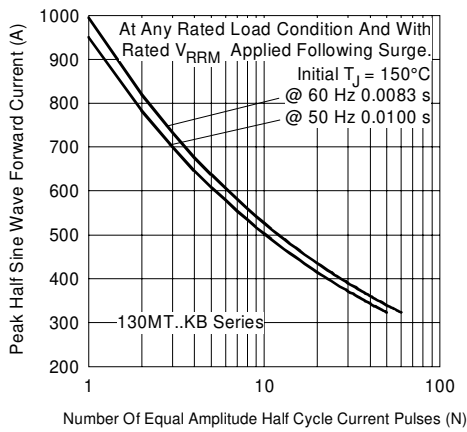


Fig. 4 - Maximum Non-Repetitive Surge Current

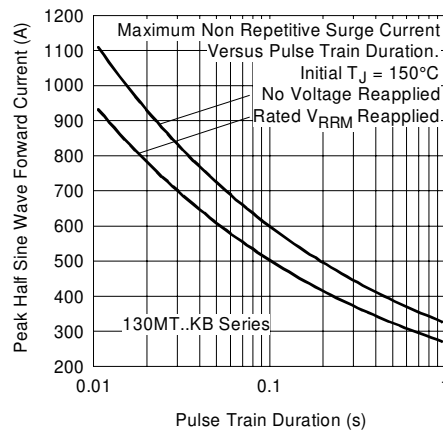


Fig. 5 - Maximum Non-Repetitive Surge Current

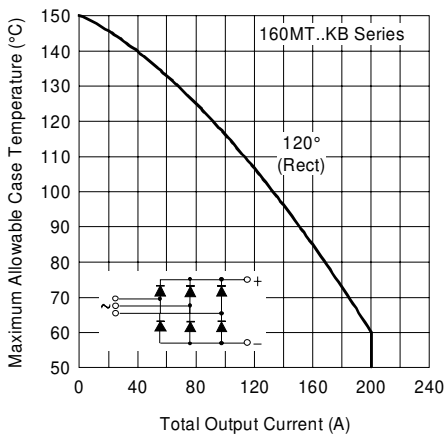


Fig. 6 - Current Ratings Characteristics

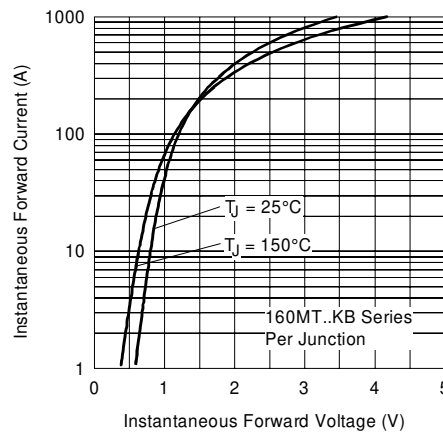


Fig. 7 - Forward Voltage Drop Characteristics

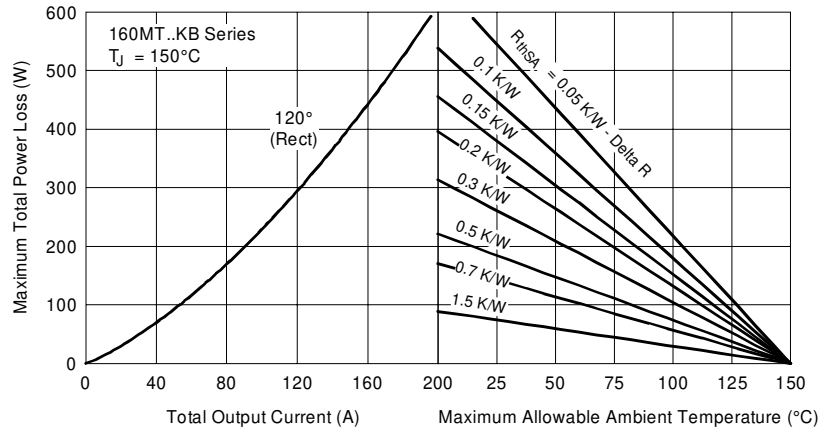


Fig. 8 - Total Power Loss Characteristics

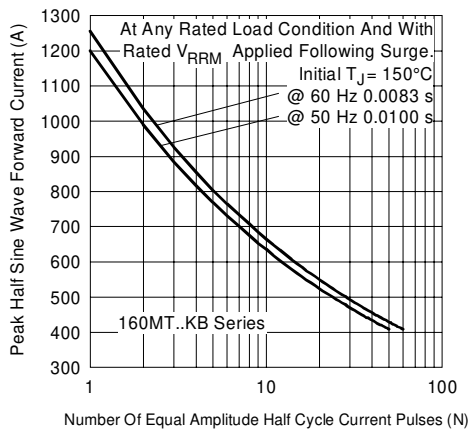


Fig. 9 - Maximum Non-Repetitive Surge Current

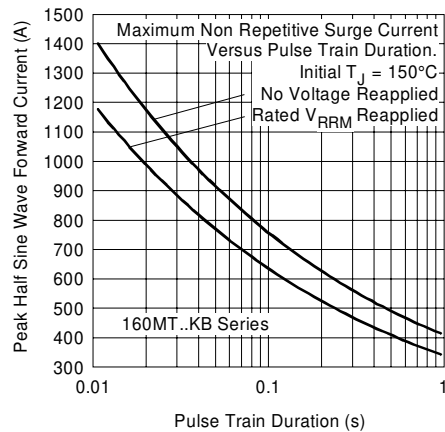


Fig. 10 - Maximum Non-Repetitive Surge Current

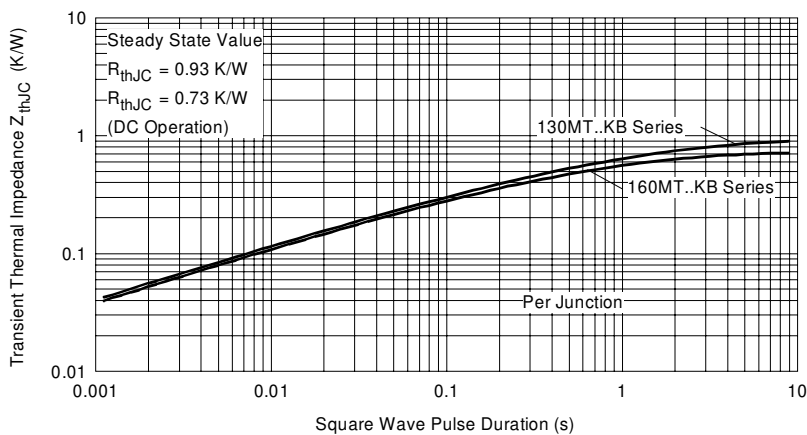


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
05 /03



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.