



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		REVISED PER ECO-12-021512	08Dec2012	H.M	K.D

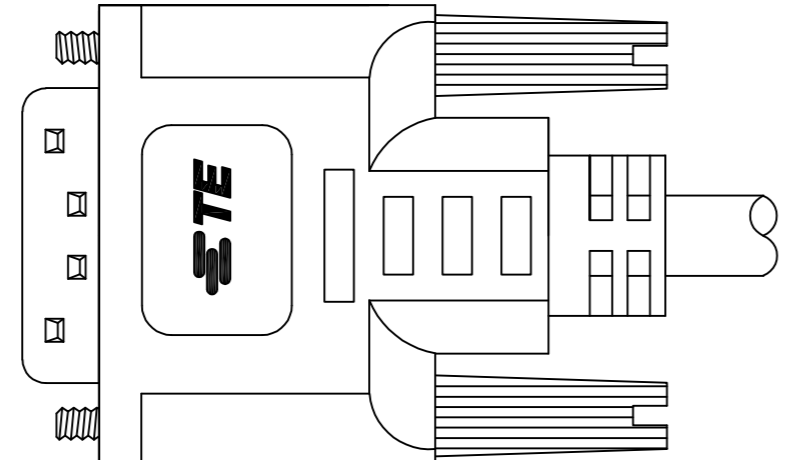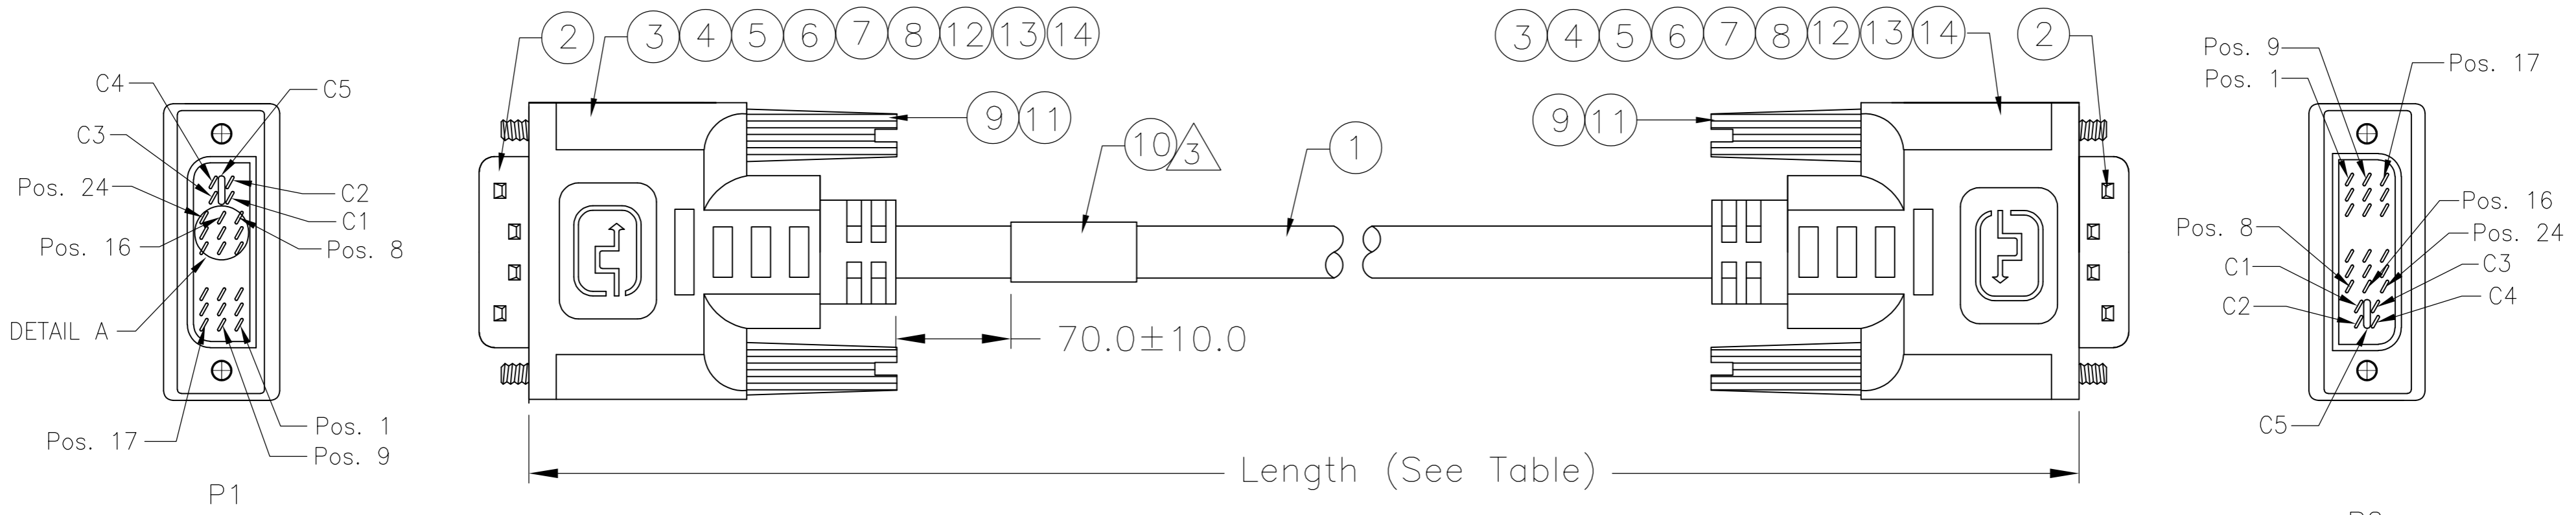

BACK SIDE

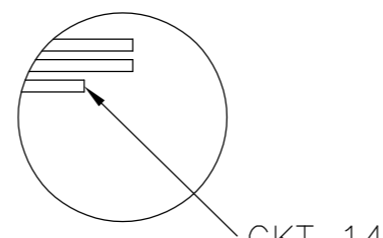

SIDE VIEW OF DETAIL A

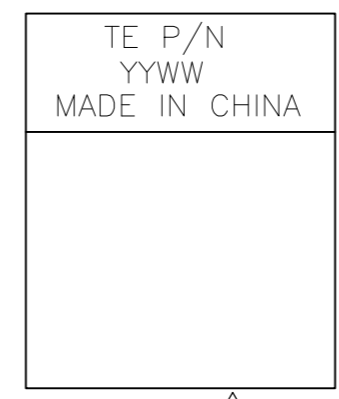


LABEL 3

3000±80		1653929-3
2000±60		1653929-2
1000±30		1653929-1
LENGTH(L)	CUSTOMER P/N	TE P/N

AR	AR	AR	MR	UL TAPE BLK (9mm)	14
AR	AR	AR	MR	Heat Shrink Tubing, OD: 1.5mm, Color: Black.	13
AR	AR	AR	MR	Heat Shrink Tubing, OD: 0.7mm, Color: Black.	12
AR	AR	AR	KG	PVC, Shore A 95±3, Color: White (WH01).	11
3	1	1	PC	Label, Size: 25.0*50.0, White: 25.0*13.0.	10
4	4	4	PC	DVI #4-40 3*45mm Thumbscrew.	9
AR	AR	AR	MR	Copper Foil, W:8mm.	8
AR	AR	AR	KG	PVC, Shore A 90±3, Color: White (WH01).	7
AR	AR	AR	MR	Heat Shrink Tubing, OD: 18.0mm, Color: Black.	6
AR	AR	AR	MR	Heat Shrink Tubing, OD: 2.5mm, Color: Black.	5
AR	AR	AR	MR	Heat Shrink Tubing, OD: 1.0mm, Color: Black.	4
2	2	2	PC	Metal Can For DVI Connector.	3
2	2	2	PC	DVI-I Connector, Gold 30U"Plated	2
AR	AR	AR	M1	UL20276 [30AWG*3Coax.+(28AWG*1P+Drain+Al/Mylar)*4+28AWG*1P+28AWG*6C]+Al/Mylar+Braid, Black(BK01)	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

PIN ASSIGNMENT :

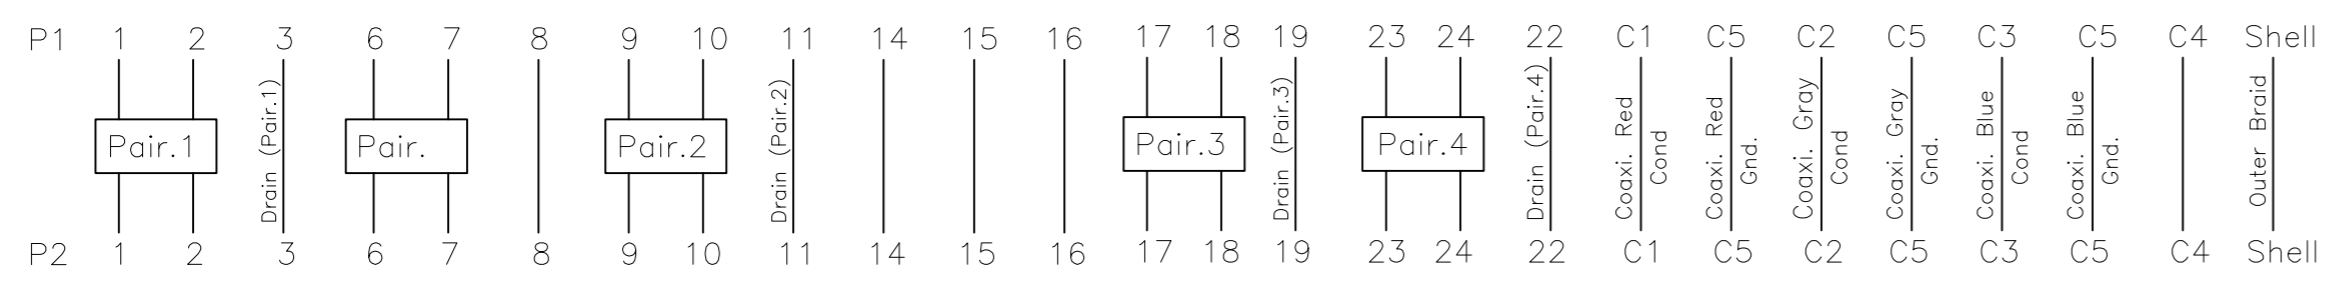

NOTES :

- CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
 - CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
 - INSULATION RESISTANCE 100M OHMS, MIN.
 - HIPOT-300 VOLTS AT 0.01 SEC.
- CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
- CABLE LABEL TO BE APPLIED AS SHOWN.
- 100% DISPLAY-SCREEN FUNCTIONAL TESTING.
- PRODUCT AND PROCESSING MUST MEET REQUIRMENTS OF TEC-138-702.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	JURRY LIU	22JAN03	 TE Connectivity	DVI-I TO DVI-I CABLE ASSEMBLY						
CHK	MONTGOMERY, JOHN D	15JUN04								
APVD	MONTGOMERY, JOHN D	15JUN04								
PRODUCT SPEC										
MATERIAL			SIZE	A2	CAGE CODE	00779	DRAWING NO	C=1653929	RESTRICTED TO	
			WEIGHT		SCALE	N.T.S	SHEET	1 OF 1	REV	J