



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FO connecting cable - VS-PC-2X-POF-980-SCRJ/FSMA-1 - 1657106

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled FO cable, break-out cable, polymer fiber 980/1000 µm, SCRJ/IP20 on FSMA/IP20, for installation inside the control cabinets, the conductor is suitable for the UV-protected outside insert, length: 1 m



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	45.7 GRM
Custom tariff number	85447000
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	2
Connection profile	SCRJ according to DIN EN 50377-6-1
Fiber	980/1000 µm
Number of fibers	2.00
Insertion/withdrawal cycles	≥ 1000
Type of cable	Break-out cable
Length of cable	1 m

Ambient conditions

Ambient temperature (operation)	-30 °C ... 70 °C
	-20 °C ... 60 °C
	-20 °C ... 70 °C
Degree of protection	IP20

Material data

Housing material	PBT/nickel silver
Outer sheath, material	PE

FO connecting cable - VS-PC-2X-POF-980-SCRJ/FSMA-1 - 1657106

Technical data

Material data

External sheath, color	black
Ferrule holder color	Blue

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27061001
eCl@ss 5.0	27260701
eCl@ss 5.1	27061803
eCl@ss 6.0	27061803
eCl@ss 7.0	27061803
eCl@ss 8.0	27061803

ETIM

ETIM 3.0	EC000034
ETIM 4.0	EC001476
ETIM 5.0	EC000830

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501


Drawings

Dimensioned drawing

FSMA plugs


Pin assignment plug SCRJ

Schematic diagram



FO connecting cable - VS-PC-2X-POF-980-SCRJ/FSMA-1 - 1657106

Dimensioned drawing

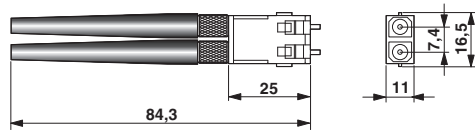

SCRJ connector IP20

Phoenix Contact 2014 © - all rights reserved
<http://www.phoenixcontact.com>