



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PUR halogen-free, Black-gray RAL 7021, Free cable end, on Socket angled M8, Cable length: 1.5 m

### Product Features

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Our standard: robust halogen-free PUR cable



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 1      |
| Weight per Piece (excluding packing) | 60.0 GRM |
| Custom tariff number                 | 85444290 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|  |       |
|--|-------|
| Length of cable                            | 1.5 m |
| Stripping length of the free conductor end | 50 mm |

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |        |
|-----------------------|--------|
| Rated current at 40°C | 4 A    |
| Rated voltage         | 60 V   |
| Number of positions   | 3      |
| Contact resistance    | ≤ 5 mΩ |

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

### Technical data

#### General

|                              |              |
|------------------------------|--------------|
| Insulation resistance        | ≥ 100 MΩ     |
| Coding                       | A - standard |
| Status display               | No           |
| Protective circuit/component | Unwired      |
| Surge voltage category       | II           |
| Pollution degree             | 3            |
| Insertion/withdrawal cycles  | ≥ 100        |

#### Material

|   |   |
|---|---|
| Inflammability class according to UL 94 | HB  |
| Contact material                        | CuSn  |
| Contact surface material                | Ni/Au                                       |
| Contact carrier material                | TPU GF                                      |
| Material of grip body                   | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                        | Zinc die-cast, nickel-plated                |
| Sealing material                        | NBR   |

#### Cable

|   |                                       |
|---|---------------------------------------|
| Cable type                                    | PUR halogen-free black                |
| Cable type (abbreviation)                     | PUR                                   |
| Cable abbreviation                            | Li9Y11Y                               |
| UL AWM style                                  | 20549                                 |
| Conductor cross section                       | 3x 0.34 mm <sup>2</sup> (signal line) |
| AWG signal line                               | 22                                    |
| Conductor structure signal line               | 42x 0.10 mm                           |
| Core diameter including insulation            | 1.27 mm ±0.02 mm (signal line)        |
| Thickness, insulation                         | ≥ 0.21 mm (Core insulation)           |
|   | approx. 0.8 mm (Outer cable sheath)   |
| Wire colors                                   | brown, blue, black                    |
| Overall twist                                 | 3 wires, twisted                      |
| External sheath, color                        | Black-gray RAL 7021                   |
| External cable diameter D                     | 4.4 mm ±0.15 mm                       |
| Smallest bending radius, fixed installation   | 22 mm                                 |
| Smallest bending radius, movable installation | 44 mm                                 |
| Number of bending cycles                      | 4000000                               |
| Bending radius                                | 44 mm                                 |
| Traversing path                               | 10 m                                  |
| Traversing rate                               | 3 m/s                                 |

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

### Technical data

#### Cable

|                                 |   |
|---------------------------------|---|
| Acceleration                    | 10 m/s <sup>2</sup>   |
| Cable weight                    | 26 kg/km  |
| Outer sheath, material          | PUR   |
| Material conductor insulation   | PP  |
| Conductor material              | Bare Cu litz wires  |
| Insulation resistance           | ≥ 100 GΩ*km (at 20 °C)  |
| Conductor resistance            | max. 58 Ω/km (at 20 °C)   |
| Nominal voltage, cable          | ≤ 300 V   |
| Test voltage, cable             | ≥ 3000 V  |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free   |
|                                 | Free of substances which would hinder coating with paint or varnish |
| Flame resistance                | in accordance with DIN UL-Style 20549                               |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

# Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

## Approvals

### Approvals

---

#### Approvals

UL Listed / GOST / cUL Listed / cULus Listed

---


#### Ex Approvals


---


#### Approvals submitted

---

## Approval details

|   |       |
|---|-------|
| UL Listed  |       |
| Nominal current IN  | 4 A   |
| Nominal voltage UN  | 125 V |

|  |  |
|--|--|
| GOST  |  |
|--|--|

|  |     |
|--|-----|
| cUL Listed  |     |
| Nominal current IN   | 4 A |

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

### Approvals

|                    |       |
|--------------------|-------|
| Nominal voltage UN | 125 V |
|--------------------|-------|



### Accessories

#### Accessories

#### Conductor marking

Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

### Cutting tools

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

### Accessories

Cable-cutting tool - CUTFOX-S VDE - 1212207



Diagonal cutter for copper and aluminum conductors, VDE-tested

---

### Marker carrier cable

Conductor marker carrier - PATG 2/15 - 1013038



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 2-4 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATG 3/15 - 1013041



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 4-7 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATG 4/15 - 1013054



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 6-10 mm, Lettering field: 4 x 15 mm

---

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

### Accessories

---

#### Protective cap

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



#### Screwdriver tools

Tool - SAC BIT M8-D10 - 1208461



Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

#### Stripping tool

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

Stripping tool - WIREFOX 10 - 1212150



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

#### Torque tool

---



# Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

## Accessories


Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors


## Drawings

Schematic diagram




Pin assignment socket M8

Cable cross section




PUR halogen-free black [PUR]

Dimensioned drawing



Socket M8 x 1, angled


Circuit diagram

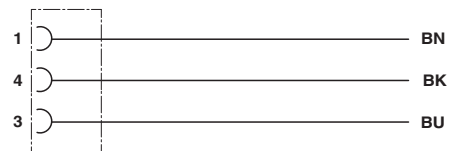

Contact assignment of M8 socket

## Sensor/Actuator cable - SAC-3PQ-1,5-PUR/M 8FR - 1671771

Schematic diagram



Layout of connector pin assignments