



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PC 4/ 4-ST-7,62

Order No.: 1804920

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804920>

Plug component, nominal current: 20 A, rated voltage: 400 V, pitch:
7.62 mm, no. of positions: 4, type of connection: Screw connection

Commercial data

EAN	4017918046361
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.017117 KG
Catalog page information	Page 322 (CC-2007)

Product notes

WEEE/RoHS-compliant since:
09/08/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	7.62 mm
Dimension a	22.86 mm
Number of positions	4
Screw thread	M 3
Tightening torque, min	0.5 Nm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Nominal voltage U_N	400 V
Nominal cross section	4 mm ²
Maximum load current	20 A
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A4
Stripping length	7 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	2.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²

2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²

Certificates / Approvals

Approval logo



CSA

Nominal voltage U _N	300 V
Nominal current I _N	20 A
AWG/kcmil	28-10

CUL

Nominal voltage U _N	600 V
Nominal current I _N	20 A
AWG/kcmil	30-10

UL

Nominal voltage U _N	600 V
Nominal current I _N	20 A
AWG/kcmil	30-10
Certification	BV, CSA, CUL, GOST, RS, UL

Accessories


Item	Designation	Description
General		
1837227	KGG-PC 4/ 3	Cable housing, for cable diameters of 4 -8 mm, clamp, marker strips and transparent label carrier are included, color: green, no. of positions: 3
1837324	KGG-PC 4/ 3-F	Cable housing with screw flange, for cable diameters of 4 -8 mm, clamp, marker strips and transparent label carrier are included, color: green, no. of positions: 3
1837256	KGS-PC 4/ 6	Cable housing, for cable diameters of 6 - 16 mm, marker strips and transparent label carrier are included, color: green, no. of positions: 6
1837353	KGS-PC 4/ 6-F	Cable housing with screw flange, for cable diameters of 6 - 16 mm, marker strips and transparent label carrier are included, color: green, no. of positions: 6
Marking		
0804549	SK 7,62/3,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 1-10, 11-20 etc. up to 91-99, sufficient for 120 terminal blocks
Plug/Adapter		
1600027	CP-HCC 4	Coding profile, is inserted into the slot on the plug and header, red insulating material
Tools		
1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm ² connection cross section, blade: 0.6 x 3.5 mm, without VDE approval

Additional products


Item	Designation	Description
General		
1849998	PCVK 4-7,62	Modular terminal blocks with plug entry, cross section: 0.2 - 4 mm ² , AWG: 30 - 10, width: 7.6 mm, color: green
1876246	PCVK 4-7,62-PE	Modular terminal blocks with plug entry, cross section: 0.2 - 4 mm ² , width: 7.6 mm, color: green-yellow
1838381	UPCV3K 4-G-7,62	Modular terminal blocks with POWER-COMBICON plug entries, cross section: 0.2 - 4 mm, AWG: 30 - 10, width: 7.6 mm, color: gray

Drawings

Diagram

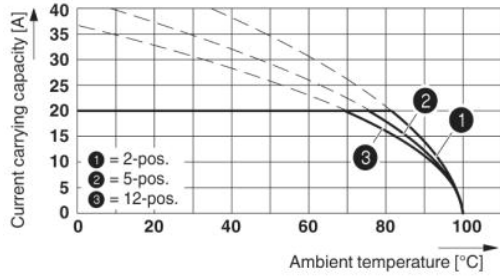


Derating curve for: PC 4/...-ST-7,62 with PC 4/...-G-7,62

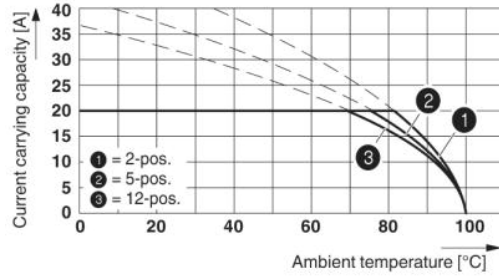

Derating curve for: PC 4/...-ST-7,62 with PCV 4/...-G-7,62

Dimensioned drawing

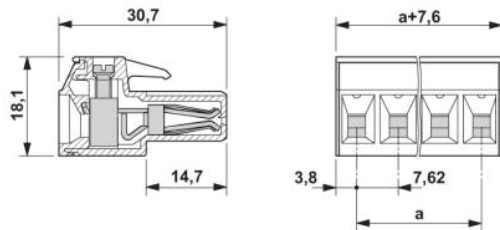

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;