



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## OMNIMATE Power - series WGK WGK 4

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

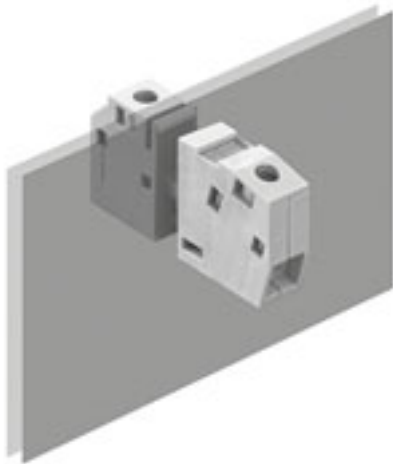

The WGK finger-proof-insulated enclosures are especially suitable as industrial electronic enclosures for frequency converters, power supplies or filter components which offer a convenient and reliable form of connection internally and externally.

### General ordering data

Order No.	<a href="#">1936550000</a>
Type	WGK 4
Version	OMNIMATE Power - series WGK, Feedthrough terminal, Rated cross-section: 4 mm <sup>2</sup> , Screw connection, Grey, Direct mounting, Feed-through (bushing)
GTIN (EAN)	4032248664337
Qty.	50 pc(s).

## OMNIMATE Power - series WGK WGK 4

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Technical data

#### Dimensions and weights

Length	35.5 mm	Width	8.1 mm
Height	21.5 mm	Height of lowest version	21.5 mm
Net weight	8.64 g		

#### 2 clampable conductors with identical cross-section

Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 22
---	--------	---	--------

#### Additional connection

Blade size	0.6 x 3.5 mm	Clamping screw	M 3
Rated current	32 A	Tightening torque, max.	0.8 Nm
Tightening torque, min.	0.6 Nm		

#### Conductors suitable for clamping

Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 22
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>	Wire connection cross section, solid core max. rated connection	6 mm <sup>2</sup>
Wire connection cross section, solid core, max. rated connection	0.5 mm <sup>2</sup>	Stripping length	8 mm

#### Rated data to IEC

Current at maximum wires	41 A	Pollution severity	3
Rated cross-section	4 mm <sup>2</sup>	Rated current	32 A
Rated impulse withstand voltage	6 kV	Rated voltage	250 V
Standards	IEC 60947-7-1		

#### Technical data

Blade size	0.6 x 3.5 mm	Clamping range, rated connection, max.	6 mm <sup>2</sup>
Clamping range, rated connection, min.	0.05 mm <sup>2</sup>	Clamping screw	M 3
Gauge to IEC 60947-1	A3	Number of connections	2
Stripping length, rated connection	8 mm	Tightening torque, max.	0.8 Nm
Tightening torque, min.	0.6 Nm		

#### Technical specification

Colour of insulating material	Grey	Connection direction	on side
End cover plate required	No	Installation advice	Direct mounting, Feed-through (bushing)
Product family	OMNIMATE Power - series WGK		

#### CSA ratings data

Certificate No. (CSA)	200039-1830694	Voltage size B (CSA)	300 V
Current size B (CSA)	30 A	Wire cross section max. (CSA)	10 AWG
Wire cross section min. (CSA)	30 AWG		

**OMNIMATE Power - series WGK  
WGK 4**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**UL ratings data**

Certificate No. (cURus)	E60693VOL1SEC84	Conductor size Factory wiring max. (cURus)	10 AWG
Conductor size Factory wiring min. (cURus)	30 AWG	Conductor size Field wiring max. (cURus)	10 AWG
Conductor size Field wiring min. (cURus)	30 AWG	Current size B (cURus)	30 A
Current size C (cURus)	30 A	Current size D (cURus)	10 A
Voltage size B (cURus)	300 V	Voltage size C (cURus)	150 V
Voltage size D (cURus)	300 V		

**Material data**

Material	Wemid	Colour	Grey
UL 94 flammability rating	V-0		

**Classifications**

ETIM 3.0	EC001283	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-34	eClass 6.2	27-14-11-34
eClass 7.1	27-14-11-34		

**Notes**

Notes • Metal walls: 1 #96 2.5 mm = 400 V; 2.5 #96 6 mm = 250 V; plastic walls: 1 #96 6 mm = 500 V

**Approvals**

Approvals




ROHS Conform




**OMNIMATE Power - series WGK  
WGK 4**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

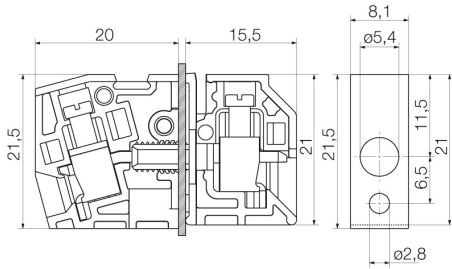

**WGK 4**

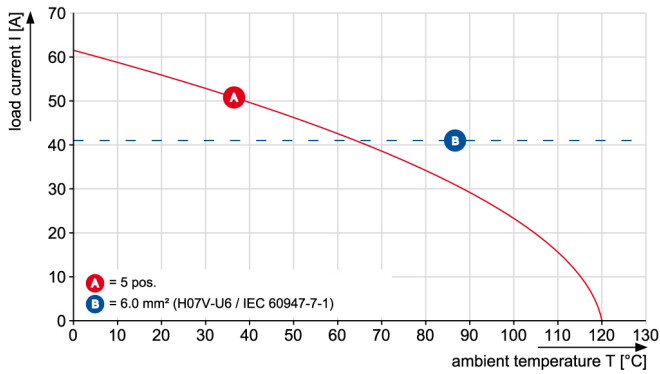

**WGK 4**

