



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Multi-position printed circuit termination blocks for through hole reflow applications

With the modern SMT solder technology, proven housing profiles from the printed circuit terminal block range from Phoenix Contact are today also used in the reflow process without any further geometric adaptations. The high-temperature resistant printed circuit terminal blocks have solder pins from the standard range and, compared to surface connections with SMD components, achieve high mechanical stability in combination with through-contacted holes. To cope with the variety of applications, five different types for the pitches 3.5 or 3.81 mm and 5 or 5.08 mm for connection cross sections up to 4 mm² are available. For automatic mounting, customer-specific tapes with free areas for grippers, for example, or packaging in tube magazines are possible. High-temperature resistant printed circuit terminal blocks are available as 2 to 3-position versions. Higher numbers of positions can be supplied on request.

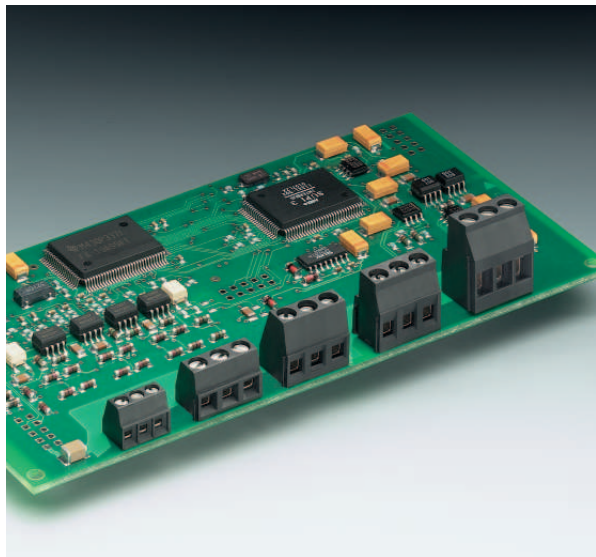

COMBICON Select

The COMBICON search engine with CAD downloading




COMBICON Select – the printed circuit board connection software supports your workflow from the PCB and housing layout to the ordering process with:


- Systematic and fast selection of products
- Universal Internet aided engineering with extensive CAD downloading
- Easy-to-use e-shopping functions.



<http://select.phoenixcontact.com>

MKDS 1/... HT BK


3.5 or 3.81 mm Pitch

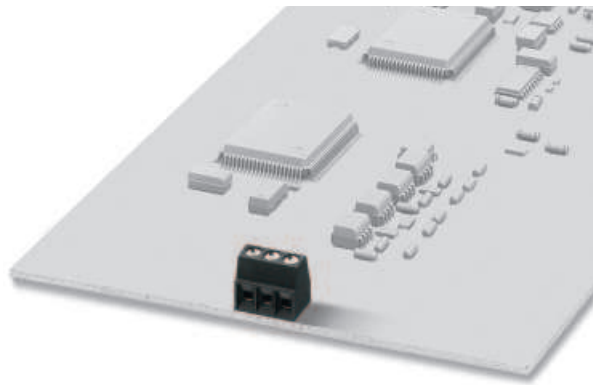




Description	Number of positions	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Printed circuit screw termination blocks, 3.5 mm pitch, color: black	2	3.5	MKDS 1/2-3,5 HT BK	19 85 80 7	50
	3	7	MKDS 1/3-3,5 HT BK	19 84 95 0	
Printed circuit screw termination blocks, 3.81 mm pitch, color: black	2	3.81	MKDS 1/2-3,81 HT BK	19 85 82 3	50
	3	7.62	MKDS 1/3-3,81 HT BK	19 85 83 6	
(1) Screwdriver, blade: 0.4 x 2.5 x 75 mm, length: 160 mm			SZS-0,4 x 2,5	12 05 03 7	10
(2) Marker card, with 14 pcs., 10-section marker strips, white, self-adhesive, for 140 terminal blocks			SK 3,5/2,8 or SK 3,81/2,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			3.5 / 3.81		
Pitch		[mm]	1.1		
Hole diameter		[mm]	0.5 x 0.9		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		-	I		
Surge voltage category / contamination class		-/-	III / 3	III / 2	II / 2
Rated voltage		[V]	63	200	200
Rated surge voltage		[kV]	2.5	2.5	2.5
Nominal current / cross section		[A]/[mm²]	10 / 1		
Maximum load current / cross section		[A]/[mm²]	12 / 1.5		
Connection capacity					
Solid / stranded / conductor sizes		[mm²]/[mm²]/AWG	0.14 - 1.5 / 0.14 - 1 / 26 - 16		
Stranded with ferrule without / with plastic sleeve		[mm²]	0.25 / 0.25 - 0.5		
Multiple connection (2 conductors with same cross section)					
Solid / stranded		[mm²]	0.14 - 0.5 / 0.14 - 0.2		
Stranded with ferrules without plastic sleeve		[mm²]	-		
Stranded with TWIN ferrule with plastic sleeve		[mm²]	-		
Stripping length		[mm]	5		
Internal cylindrical gauge (IEC 60 947-1)		-	-		
Thread		-	M 2		
Torque		-	0.22 - 0.25		
Insulating material		-	PA		
Inflammability class in acc. with UL 94		-	V0		



MKDSN 1,5/...HT BK 5.0 or 5.08 mm Pitch

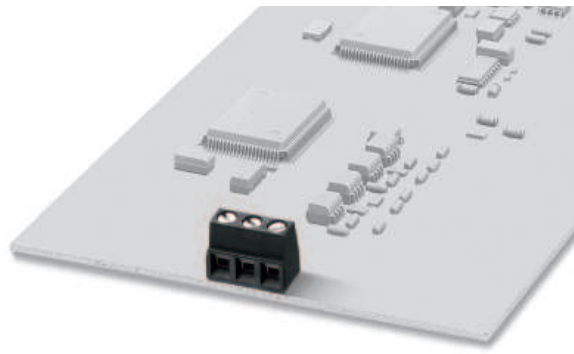



Description	Number of positions	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Printed circuit screw termination blocks, 5.0 mm pitch, color: black	2	5	MKDSN 1,5/2 HT BK	19 85 84 9	50
	3	10	MKDSN 1,5/3 HT BK	19 85 85 2	
Printed circuit screw termination blocks, 5.08 mm pitch, color: black	2	5.08	MKDSN 1,5/2-5,08 HT BK	19 85 86 5	50
	3	10.16	MKDSN 1,5/3-5,08 HT BK	19 85 87 8	
(1) Screwdriver , blade: 0.6 x 3.5 x 100 mm, length: 180 mm			SZS 0,6 x 3,5	12 05 05 3	10
(2) Marker card , with 12 pcs., 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5/3,8 or SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5 / 5.08		
Pitch		[mm]	1.3		
Hole diameter		[mm]	0.5 x 1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		-	I		
Surge voltage category / contamination class		-/-	III / 3	III / 2	II / 2
Rated voltage		[V]	200	320	320
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm ²]	13.5 / 1.5		
Maximum load current / cross section		[A]/[mm ²]	13.5 / 1.5		
Connection capacity					
Solid / stranded / conductor sizes		[mm ²]/[mm ²]/AWG	0.14 - 1.5 / 0.14 - 1.5 / 26 - 16		
Stranded with ferrule without / with plastic sleeve		[mm ²]	0.25 - 1.0 / 0.25 - 1.5		
Multiple connection (2 conductors with same cross section)					
Solid / stranded		[mm ²]	0.14 - 0.75 / 0.14 - 0.75		
Stranded with ferrules without plastic sleeve		[mm ²]	0.25 - 0.5		
Stranded with TWIN ferrule with plastic sleeve		[mm ²]	0.5 - 1		
Stripping length		[mm]	6		
Internal cylindrical gauge (IEC 60 947-1)		-	A 1		
Thread		-	M 3		
Torque		-	0.5 - 0.6		
Insulating material		-	PA		
Inflammability class in acc. with UL 94		-	V0		





MKDS 1,5/...HT BK

5.0 or 5.08 mm Pitch

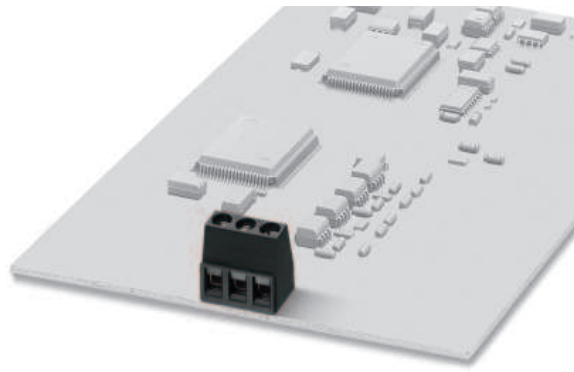



Description	Number of positions	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Printed circuit screw termination blocks, 5.0 mm pitch, color: black	2 3	5 10	MKDS 1,5/2 HT BK MKDS 1,5/3 HT BK	19 85 88 1 19 85 89 4	50
Printed circuit screw termination blocks, 5.08 mm pitch, color: black	2 3	5.08 10.16	MKDS 1,5/2-5,08 HT BK MKDS 1,5/3-5,08 HT BK	19 85 90 4 19 85 91 7	50
(1) Screwdriver , blade: 0.6 x 3.5 x 100 mm, length: 180 mm			SZS 0,6 x 3,5	12 05 05 3	10
(2) Marker card , with 12 pcs., 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5/3,8 or SK 5,08/3,8 (see COMBICON catalog)		
Technical data					
Dimensions	see description				
Pitch	5 / 5.08 [mm]				
Hole diameter	1.3 [mm]				
Pin dimensions	0.9 x 0.9 [mm]x[mm]				
Technical data in accordance with IEC/ DIN VDE					
Insulating material group	I				
Surge voltage category / contamination class	III / 3 III / 2 II / 2				
Rated voltage	200 [V]				
Rated surge voltage	4 [kV]				
Nominal current / cross section	17.5 / 1.5 [A]/[mm²]				
Maximum load current / cross section	24 / 2.5 [A]/[mm²]				
Connection capacity					
Solid / stranded / conductor sizes	0.14 - 2.5 / 0.14 - 1.5 / 26 - 14 [mm²]/[mm²]/AWG				
Stranded with ferrule without / with plastic sleeve	0.25 - 1.5 / 0.25 - 1.5 [mm²]				
Multiple connection (2 conductors with same cross section)					
Solid / stranded	0.14 - 1 / 0.14 - 0.75 [mm²]				
Stranded with ferrules without plastic sleeve	0.25 - 0.5 [mm²]				
Stranded with TWIN ferrule with plastic sleeve	0.5 - 1 [mm²]				
Stripping length	7 [mm]				
Internal cylindrical gauge (IEC 60 947-1)	A 1				
Thread	M 3				
Torque	0.5 - 0.6				
Insulating material	PA				
Inflammability class in acc. with UL 94	V0				





MKDSN 2,5/...HT BK

5.0 or 5.08 mm Pitch

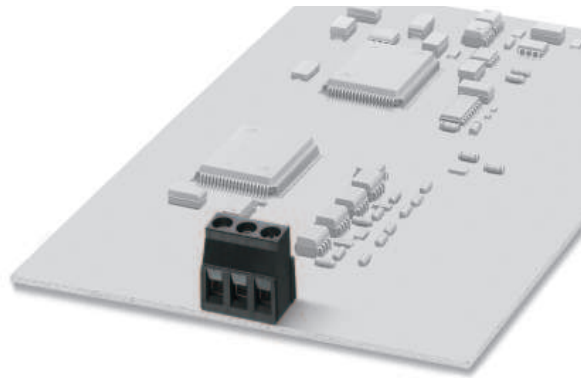



Description	Number of positions	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Printed circuit screw termination blocks, 5.0 mm pitch, color: black	2	5	MKDSN 2,5/2 HT BK	19 85 92 0	50
	3	10	MKDSN 2,5/3 HT BK	19 85 93 3	
Printed circuit screw termination blocks, 5.08 mm pitch, color: black	2	5.08	MKDSN 2,5/2-5,08 HT BK	19 85 94 6	50
	3	10.16	MKDSN 2,5/3-5,08 HT BK	19 85 95 9	
(1) Screwdriver, blade: 0.6 x 3.5 x 100 mm, length: 180 mm			SZS 0,6 x 3,5	12 05 05 3	10
(2) Marker card, with 12 pcs., 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5/3,8 or SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5 / 5.08		
Pitch		[mm]	1.3		
Hole diameter		[mm]	0.8 x 0.9		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		-	I		
Surge voltage category / contamination class		-/-	III / 3	III / 2	II / 2
Rated voltage		[V]	200	320	320
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm ²]	16 / 2.5		
Maximum load current / cross section		[A]/[mm ²]	16 / 2.5		
Connection capacity					
Solid / stranded / conductor sizes		[mm ²]/[mm ²]/AWG	0.2 - 2.5 / 0.2 - 2.5 / 24 - 14		
Stranded with ferrule without / with plastic sleeve		[mm ²]	0.25 - 2.5 / 0.25 - 2.5		
Multiple connection (2 conductors with same cross section)					
Solid / stranded		[mm ²]	0.2 - 0.75 / 0.2 - 0.75		
Stranded with ferrules without plastic sleeve		[mm ²]	0.25 - 0.75		
Stranded with TWIN ferrule with plastic sleeve		[mm ²]	0.5 - 1.5		
Stripping length		[mm]	6.5		
Internal cylindrical gauge (IEC 60 947-1)		-	A 3		
Thread		-	M 3		
Torque		-	0.5 - 0.6		
Insulating material		-	PA		
Inflammability class in acc. with UL 94		-	V0		





MKDS 3/... HT BK

5.0 or 5.08 mm Pitch

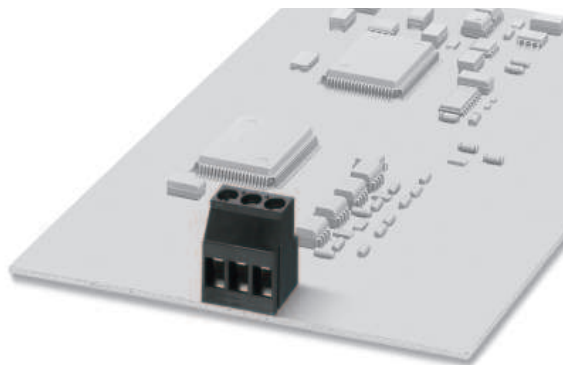

Description	Number of positions	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Printed circuit screw termination blocks, 5.0 mm pitch, color: black	2	5	MKDS 3/2 HT BK	19 85 96 2	50
	3	10	MKDS 3/3 HT BK	19 85 97 5	
Printed circuit screw termination blocks, 5.08 mm pitch, color: black	2	5.08	MKDS 3/2-5,08 HT BK	19 85 98 8	50
	3	10.16	MKDS 3/3-5,08 HT BK	19 85 99 1	
(1) Screwdriver , blade: 0.6 x 3.5 x 100 mm, length: 180 mm			SZS 0,6 x 3,5	12 05 05 3	10
(2) Marker card , with 12 pcs., 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5/3,8 or SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5 / 5.08		
Pitch		[mm]	1.3		
Hole diameter		[mm]	0.9 x 0.9		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		-	I		
Surge voltage category / contamination class		-/-	III / 3	III / 2	II / 2
Rated voltage		[V]	200	320	320
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm ²]	24 / 2.5		
Maximum load current / cross section		[A]/[mm ²]	28 / 4		
Connection capacity					
Solid / stranded / conductor sizes		[mm ²]/[mm ²]/AWG	0.2 - 4 / 0.2 - 2.5 / 24 - 12		
Stranded with ferrule without / with plastic sleeve		[mm ²]	0.25 - 2.5 / 0.25 - 1.5		
Multiple connection (2 conductors with same cross section)					
Solid / stranded		[mm ²]	0.2 - 1.5 / 0.2 - 1.5		
Stranded with ferrules without plastic sleeve		[mm ²]	0.25 - 0.75		
Stranded with TWIN ferrule with plastic sleeve		[mm ²]	0.5 - 1.5		
Stripping length		[mm]	7		
Internal cylindrical gauge (IEC 60 947-1)		-	A 3		
Thread		-	M 3		
Torque		-	0.5 - 0.6		
Insulating material		-	PA		
Inflammability class in acc. with UL 94		-	V0		



http://www.phoenixcontact.com

© Phoenix Contact 15.03.03 TNR: 5152717-00