



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1N746A THRU 1N759A

SILICON ZENER DIODES  
500mW, 3.3 THRU 12 VOLT  
5% TOLERANCE




www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N746A series silicon Zener diode is a highly reliable voltage regulator designed for use in industrial, commercial, entertainment and computer applications.

MARKING: FULL PART NUMBER

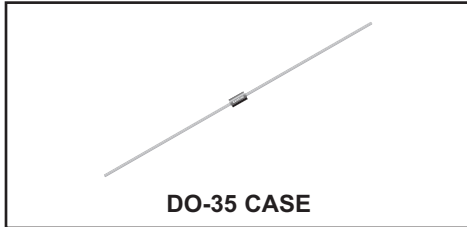

MAXIMUM RATINGS: ( $T_L=75^\circ\text{C}$ )

Power Dissipation

Operating and Storage Junction Temperature

SYMBOL

$P_D$

$T_J, T_{stg}$

500

-65 to +200

UNITS

mW

$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$ )  $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$  (for all types)

Type	Zener Voltage $V_Z @ I_{ZT}$			Test Current	Maximum Zener Impedance	Maximum Reverse Leakage Current		Maximum Reverse Leakage Current @ $T_A=150^\circ\text{C}$		Maximum Regulator Current
	MIN	NOM	MAX	$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		$I_R @ V_R$		$I_{ZM}$
	V	V	V	mA	$\Omega$	$\mu\text{A}$	V	$\mu\text{A}$	V	mA
1N746A	3.135	3.3	3.465	20	28	10	1.0	30	1.0	110
1N747A	3.420	3.6	3.780	20	24	10	1.0	30	1.0	100
1N748A	3.705	3.9	4.095	20	23	10	1.0	30	1.0	95
1N749A	4.085	4.3	4.515	20	22	2.0	1.0	30	1.0	85
1N750A	4.465	4.7	4.935	20	19	2.0	1.0	30	1.0	75
1N751A	4.845	5.1	5.355	20	17	1.0	1.0	20	1.0	70
1N752A	5.320	5.6	5.880	20	11	1.0	1.0	20	1.0	65
1N753A	5.890	6.2	6.510	20	7.0	0.1	1.0	20	1.0	60
1N754A	6.460	6.8	7.140	20	5.0	0.1	1.0	20	1.0	55
1N755A	7.125	7.5	7.875	20	6.0	0.1	1.0	20	1.0	50
1N756A	7.790	8.2	8.610	20	8.0	0.1	1.0	20	1.0	45
1N757A	8.645	9.1	9.555	20	10	0.1	1.0	20	1.0	40
1N758A	9.50	10	10.50	20	17	0.1	1.0	20	1.0	35
1N759A	11.40	12	12.60	20	30	0.1	1.0	20	1.0	30

1N746A THRU 1N759A  
 SILICON ZENER DIODES  
 500mW, 3.3 THRU 12 VOLT  
 5% TOLERANCE



DO-35 CASE - MECHANICAL OUTLINE

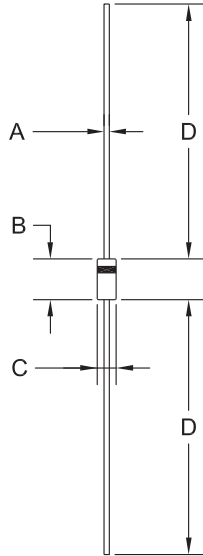

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.090	1.52	2.29
D	1.000	-	25.40	-

DO-35 (REV: R1)

MARKING: FULL PART NUMBER

R1

R1 (17-December 2013)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)