



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




FLKM 50/ 4-FLK14/PA-S400

Order No.: 2294429

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2294429>

VARIOFACE front adapter, for Siemens SIMATIC® S7-400, 4 x 8 channels can be connected

Commercial data

GTIN (EAN)	 4 017918 185398
sales group	I600
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 214 (IF-2009)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General


Nominal voltage U_N	< 50 V AC
	60 V DC
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	4
No. of positions, plug connector	14
Number of positions	14
Ambient temperature (operation)	-20 °C ... 50 °C
Mounting position	Any

Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
	8 A (per connection, supply via separate power supply)
Max. permissible total current	2 A (Per Byte, for supply via connector)
Pollution degree	2
Surge voltage category	II
Supported controller	SIEMENS S7-400
Supported I/O card	421-1BL01-0AA0
	422-1BL00-0AA0
	422-7BL00-0AB0

Diagrams/Drawings

Circuit diagram

Connection scheme: FLKM 50/4-FLK14/PA-S400

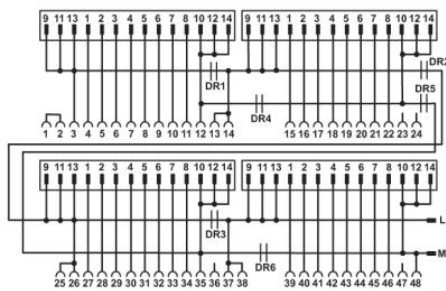

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;