



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FL IF 2FX SC-F

Order No.: 2832412

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832412>FO media module for connecting 100Base-FX multimode glass fibers
(1300 nm), connection direction forwards**Ethernet****Product notes**WEEE/RoHS-compliant since:
11/27/2007**Commercial data**

GTIN (EAN)	 4 017918 974466
sales group	K000
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 189 (AX-2009)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Interfaces**

Interface	Ethernet: 100Base-FX in acc. with IEEE 802.3
No. of ports	2
Type of connection	SC connector
Transmission speed	100 MBit/s

Transmission length	10000 m (maximum (depends on the fiber used))
Interface	Ethernet: 100Base-FX in acc. with IEEE 802.3
No. of ports	2
Type of connection	SC connector
Transmission speed	100 MBit/s
Transmission length	2800 m (glass fiber with F-G 50/125 1.6 dB/km F800)
	6400 m (glass fiber with F-G 50/125 0.7 dB/km F1200)
	3000 m (glass fiber with F-G 62.5/125 2.6 dB/km F600)
	2800 m (glass fiber with F-G 50/125 1.6 dB/km F800)
Function	
Basic functions	Media module for modular managed switch
Supply voltage	
Supply voltage	(via head station)
Typical current consumption	200 mA
General data	
Weight	80 g
Width	31 mm
Height	75.7 mm
Depth	72.5 m
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C (no condensation)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (no condensation)
Permissible humidity (storage/transport)	10 % ... 95 % (no condensation)
Housing material	PA
Noise emission	EN 61000-6-3/-4
Noise immunity	EN 61000-6-2:2005
Mechanical tests	
Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Operation: 25 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Storage/Transport: 50 g, 11 ms duration, semi-sinusoidal shock impulse
Inflammability class acc. to UL 94	V0

Conformity with EMC directives

Developed in acc. with standard	IEC 61000-6.2
Test standard	IEC 61000-4-2 (ESD)
Test result	Criterion B
Test standard	IEC 61000-4-3 (immunity to radiated interference)
Test result	Criterion A
Test standard	IEC 61000-4-4 (burst)
Test result	Criterion A
Test standard	IEC 61000-4-5 (surge)
Test result	Criterion A
Test standard	IEC 61000-4-6 (immunity to conducted interference)
Test result	Criterion A
Test standard	IEC 61000-4-8 (immunity to magnetic fields)
Test result	Criterion A
Test standard	EN 55022 (emitted interference)
Test result	Criterion A

Certificates / Approvals




Certification ABS, CUL, UL

Certification Ex: CUL-EX LIS, UL-EX LIS

Diagrams/Drawings

Dimensioned drawing

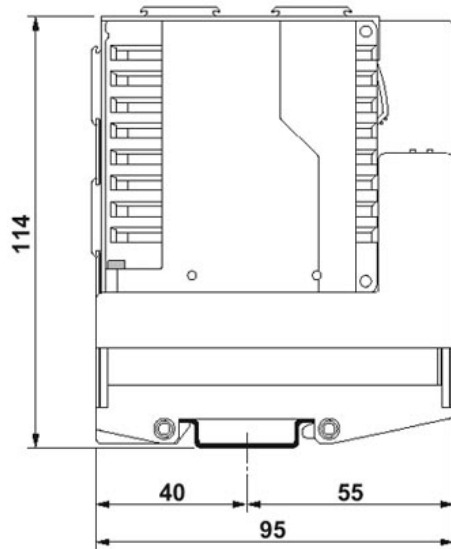

The illustration shows a version of the interface module with the head station FL SWITCH MM HS

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;