



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FL IF 2PSE-F

Order No.: 2832904

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832904>

Media module with two PoE twisted-pair ports for the modular managed switch system, output towards the front

Ethernet**Commercial data**

GTIN (EAN)	 4 046356 076050
Note	Made-to-order
sales group	K000
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 189 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
12/08/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Interfaces**

Interface	Ethernet
No. of ports	2 (PoE ports)
Type of connection	RJ45 female connector
Transmission physics	Ethernet in RJ45 twisted pair
Transmission speed	10/100 MBit/s (connection direction forwards)

Transmission length	100 m (per segment)
No. of ports	2
Transmission speed	10/100 MBit/s (connection direction forwards)
Transmission length	100 m (per segment)

Function

Basic functions	Media module for Modular Managed Switch with Power over Ethernet IEEE802.3af, Power Source Equipment (PSE)
-----------------	--

Supply voltage

Supply voltage	(Internal / 48 V DC for PoE)
Supply voltage range	45.5 V DC ... 53 V DC
Typical current consumption	10 mA (Max. 900 mA)

General data

Weight	70 g
Width	31 mm
Height	84.7 mm
Depth	75.5 mm
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C (no condensation)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (no condensation)
Permissible humidity (storage/transport)	10 % ... 95 % (no condensation)
Housing material	PA 6.6
Noise emission	EN 61000-6-3/-4
Noise immunity	EN 61000-6-2:2005

Mechanical tests

Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Operation: 25 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Storage/Transport: 50 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Vibration resistance in acc. with IEC 60068-2-6
Test result	Operation/Storage/Transport: 5 g, 150 Hz, Criterion 3
Type of test	Free fall in acc. with IEC 60068-2-32
Test result	1 m

Inflammability class acc. to UL 94	V0
Conformity with EMC directives	
Developed in acc. with standard	IEC 61000-6.2
Test standard	IEC 61000-4-2 (ESD)
Test result	Criterion B
Test standard	IEC 61000-4-3 (immunity to radiated interference)
Test result	Criterion A
Test standard	IEC 61000-4-4 (burst)
Test result	Criterion A
Test standard	IEC 61000-4-5 (surge)
Test result	Criterion A
Test standard	IEC 61000-4-6 (immunity to conducted interference)
Test result	Criterion A
Test standard	IEC 61000-4-8 (immunity to magnetic fields)
Test result	Criterion A
Test standard	EN 55022 (emitted interference)
Test result	Criterion A

Certificates / Approvals



Certification: CUL, UL
 Certification Ex: CUL-EX LIS, UL-EX LIS

Accessories

Item	Designation	Description
Cable/conductor		
2744830	FL CAT5 FLEX	CAT5-SF/UTP cable (J-LI02YS(ST)C H 2 x 2 x 26 AWG), light-duty, flexible installation cable 2 x 2 x 0.14 mm ² , stranded, shielded, outer sheath: 5.75 mm ± 0.15 mm diameter

2744814	FL CAT5 HEAVY	CAT5-SF/UTP cable (J-02YS(ST)C HP 2 x 2 x 24 AWG), heavy-duty installation cable, 2 x 2 x 0.22 mm ² , solid conductor, shielded, outer sheath: 7.8 mm diameter, inner sheath: 5.75 mm ± 0.15 mm diameter
---------	---------------	---

Plug/Adapter

2744571	FL PLUG RJ45 GN/2	RJ45 connector, shielded, with bend protection sleeve, 2 pieces, green for crossed cables, for assembly on site. For connections that are crossed, it is recommended that the connector set with green bend protection sleeves is used.
2744856	FL PLUG RJ45 GR/2	RJ45 connector, shielded, with bend protection sleeve, 2 pieces, gray for straight cables, for assembly on site. For connections that are not crossed, it is recommended that you use the connector set with gray bend protection sleeve.

Sleeve housing


1652295	VS-08-T-G-RJ45/IP20	RJ45 sleeve housing, IP20, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, inverted design, for Factoryline modular managed switches, for cable cross section 5.0 mm ... 6.5 mm
---------	---------------------	--

Tools

2744869	FL CRIMPTOOL	Crimping pliers, for assembling the RJ45 connectors FL PLUG RJ45..., for assembly on site
---------	--------------	---

Diagrams/Drawings

Dimensioned drawing

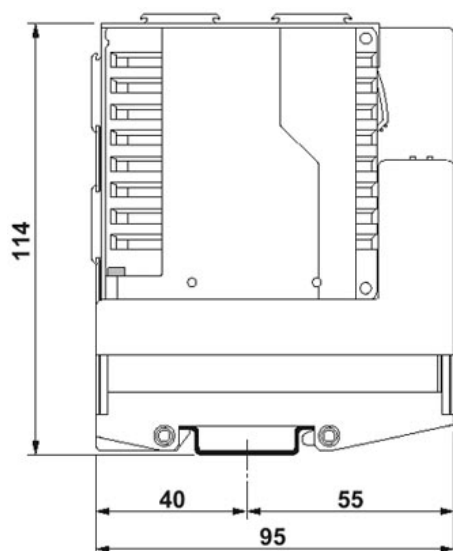

The illustration shows a version of the interface module with the head station FL SWITCH MM HS

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;