



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EMG 45-NZG/G24/SI

Order No.: 2954989



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2954989>

Voltage regulator module with fixed-voltage regulator, input 24 V-29 V AC/ 28 V-38 V DC, output 24 V DC/1 A

Commercial data

EAN	4017918085223
Pack	1 pcs.
Customs tariff	85044081
Weight/Piece	0.2003 KG

Product notes

WEEE/RoHS-compliant since:
04/01/2007



<http://>

www.download.phoenixcontact.com

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage	27 V AC 5%
	28 V DC ... 38 V DC
AC frequency range	60 Hz ... 50 Hz

Nominal power consumption	Approx. 41 VA
Input fuse	1.25 A (normal-blow (5 x 20))

Output data

Nominal output voltage	24 V DC \pm 4%
Output current	1 A
Residual ripple	\leq 150 mV _{pp}
Name of protection	Thermo-electronic disconnect
Protective circuit/component	Varistor

General data

Width	45 mm
Height	86 mm
Depth	75 mm
Weight	178 g
Operating voltage display	LED green
Operating mode	100% operating factor
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C
Mounting position	Vertical, horizontal
Assembly instructions	Can be aligned with spacing = 5 mm

Connection data, input

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Screw thread	M3

Connection data, output

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²

Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm

Certificates / Approvals



Certification GOST, UL

UL

Comments	Input
Nominal voltage U _N	27 V
Nominal current I _N	1.52 A
Comments	Output
Nominal voltage U _N	24 V
Nominal current I _N	1 A

Accessories


Item	Designation	Description
------	-------------	-------------

Marking


2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

Diagrams/Drawings

Diagram

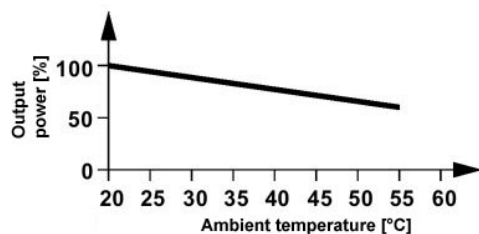

Circuit diagram

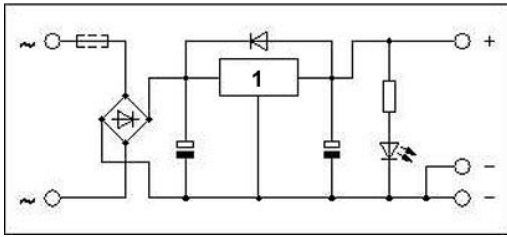

1 = regulator

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;