



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



2N5060 THRU 2N5064

SILICON CONTROLLED RECTIFIERS
0.8 AMP, 30 THRU 200 VOLT



www.centrasemi.com

The CENTRAL SEMICONDUCTOR 2N5060 series devices are epoxy molded SCRs designed for control systems and sensing circuit applications.



TO-92 CASE

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	2N5060	2N5061	2N5062	2N5063	2N5064	UNITS
Peak Repetitive Off-State Voltage	V_{DRM}, V_{RRM}	30	60	100	150	200	V
RMS On-State Current (Note 1; $T_C=80^\circ\text{C}$)	$I_T(\text{RMS})$			0.8			A
Average On-State Current (Note 1; $T_C=67^\circ\text{C}$)	$I_T(\text{AV})$			0.51			A
Average On-State Current (Note 1; $T_C=102^\circ\text{C}$)	$I_T(\text{AV})$			0.255			A
Peak One Cycle Surge Current (60Hz)	I_{TSM}			10			A
I^2t Value for Fusing ($t=8.3\text{ms}$)	I^2t			0.4			A^2s
Peak Forward Gate Power ($t_p \leq 1.0\mu\text{s}$)	P_{GM}			0.1			W
Average Forward Gate Power ($t=8.3\text{ms}$)	$P_{G(\text{AV})}$			0.01			W
Peak Forward Gate Current ($t_p \leq 1.0\mu\text{s}$)	I_{GM}			1.0			A
Peak Reverse Gate Voltage ($t_p \leq 1.0\mu\text{s}$)	V_{RGM}			5.0			V
Operating Junction Temperature	T_J			-40 to +125			$^\circ\text{C}$
Storage Temperature	T_{stg}			-40 to +150			$^\circ\text{C}$
Thermal Resistance (Note 2)	θ_{JC}			75			$^\circ\text{C/W}$
Thermal Resistance	θ_{JA}			200			$^\circ\text{C/W}$

Notes: 1) 180° Conduction Angles

2) Measured with the "flat side down" on a heatsink and held in position by a metal clamp over the curved surface.

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{DRM}, I_{RRM}	V_D =Rated V_{DRM} , $R_{GK}=1.0\text{k}\Omega$			10	μA
I_{DRM}, I_{RRM}	V_D =Rated V_{DRM} , $R_{GK}=1.0\text{k}\Omega$, $T_C=110^\circ\text{C}$			50	μA
I_{GT}	$V_D=7.0\text{V}$, $R_L=100\Omega$			200	μA
I_{GT}	$V_D=7.0\text{V}$, $R_L=100\Omega$, $T_C=-40^\circ\text{C}$			350	μA
I_H	Initiating Current, $I_T=20\text{mA}$, $R_{GK}=1.0\text{k}\Omega$			5.0	mA
I_H	Initiating Current, $I_T=20\text{mA}$, $R_{GK}=1.0\text{k}\Omega$, $T_C=-40^\circ\text{C}$			10	mA
V_{GT}	$V_D=7.0\text{V}$, $R_L=100\Omega$			0.8	V
V_{GT}	$V_D=7.0\text{V}$, $R_L=100\Omega$, $T_C=-40^\circ\text{C}$			1.2	V
V_{GD}	V_D =Rated V_{DRM} , $R_L=100\Omega$, $T_C=110^\circ\text{C}$	0.1			V
V_{TM}	$I_{TM}=1.2\text{A}$, $T_A=25^\circ\text{C}$			1.7	V
dv/dt	V_D =Rated V_{DRM} , $R_{GK}=1.0\text{k}\Omega$		30		V/ μs

R5 (7-May 2015)


2N5060 THRU 2N5064
SILICON CONTROLLED RECTIFIERS
0.8 AMP, 30 THRU 200 VOLT



ELECTRICAL CHARACTERISTICS - Continued: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5060	2N5062	UNITS
		2N5061	2N5063 2N5064	
		TYP	TYP	
t_d	$V_D = \text{Rated } V_{DRM}, I_{GT} = 1.0\text{mA}$	3.0	3.0	μs
t_r	Forward Current=1.0A, $di/dt=6.0\text{A}/\mu\text{s}$	0.2	0.2	μs
t_q	Forward Current=1.0A, $t_p=50\mu\text{s}$, 0.1% Duty Cycle, $di/dt=6.0\text{A}/\mu\text{s}$, $dv/dt=20\text{V}/\mu\text{s}$, $I_{GT}=1.0\text{mA}$	10	30	μs

TO-92 CASE - MECHANICAL OUTLINE

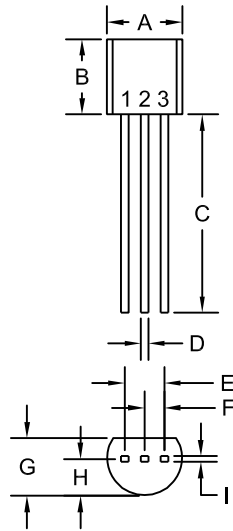

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Cathode
- 2) Gate
- 3) Anode

MARKING:
FULL PART NUMBER

R1

R5 (7-May 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms