



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 2SK3277

## Silicon N-channel power MOSFET

### ■ Features

- Avalanche energy capability guaranteed
- High-speed switching
- No secondary breakdown

### ■ Applications

- Non-contact relay
- Solenoid drive
- Motor drive
- Control equipment
- Switching mode regulator

### ■ Absolute Maximum Ratings $T_C = 25^\circ\text{C}$


Parameter	Symbol	Rating	Unit
Drain-source surrender voltage	$V_{DSS}$	200	V
Gate-source surrender voltage	$V_{GSS}$	$\pm 20$	V
Drain current	$I_D$	$\pm 2.5$	A
Peak drain current	$I_{DP}$	$\pm 5$	A
Avalanche energy capability *	EAS	15	mJ
Power dissipation	$P_D$	10	W
	$T_a = 25^\circ\text{C}$	1	
Channel temperature	$T_{ch}$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

Note) \*:  $L = 5\text{ mH}$ ,  $I_L = 2.5\text{ A}$ , 1 pulse

### ■ Electrical Characteristics $T_C = 25^\circ\text{C} \pm 3^\circ\text{C}$


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-source surrender voltage	$V_{DSS}$	$I_D = 1\text{ mA}$ , $V_{GS} = 0$	200			V
Drain-source cutoff current	$I_{DSS}$	$V_{DS} = 160\text{ V}$ , $V_{GS} = 0$			10	$\mu\text{A}$
Gate-source cutoff current	$I_{GSS}$	$V_{GS} = \pm 20\text{ V}$ , $V_{DS} = 0$			$\pm 10$	$\mu\text{A}$
Gate threshold voltage	$V_{th}$	$V_{DS} = 25\text{ V}$ , $I_D = 1\text{ mA}$	2.0		4.0	V
Drain-source ON resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}$ , $I_D = 1.25\text{ A}$		1.2	1.7	$\Omega$
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 25\text{ V}$ , $I_D = 1.25\text{ A}$	0.7	1.3		S
Diode forward voltage	$V_{DF}$	$I_{DR} = 2.5\text{ A}$ , $V_{GS} = 0$			-1.4	V
Short-circuit forward transfer capacitance (Common source)	$C_{iss}$	$V_{DS} = 20\text{ V}$ , $V_{GS} = 0$ , $f = 1\text{ MHz}$		170		pF
Short-circuit output capacitance (Common source)	$C_{oss}$			25		pF
Reverse transfer capacitance (Common source)	$C_{rss}$			15		pF
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 100\text{ V}$ , $I_D = 1\text{ A}$ , $R_L = 100\ \Omega$		18		ns
Rise time	$t_r$	$V_{GS} = 10\text{ V}$		35		ns
Turn-off delay time	$t_{d(off)}$			200		ns
Fall time	$t_f$			60		ns
Thermal resistance (ch-c)	$R_{th(ch-c)}$				12.5	$^\circ\text{C/W}$
Thermal resistance (ch-a)	$R_{th(ch-a)}$				125	$^\circ\text{C/W}$



Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

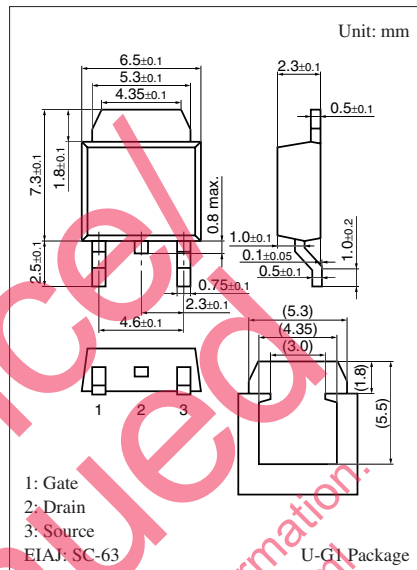

Marking Symbol: K3277

Internal Connection

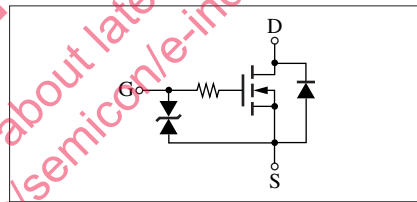

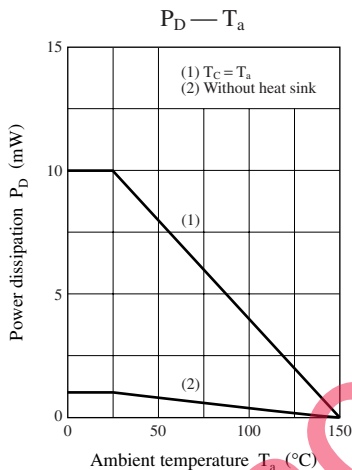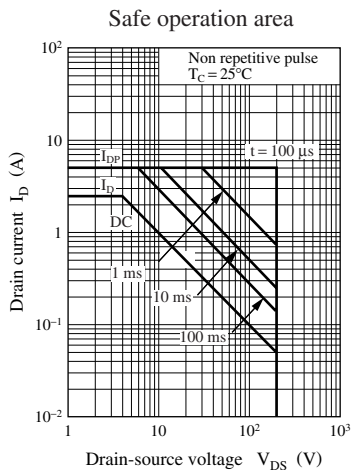

Maintenance/Discontinued

Please visit following URL about latest information.  
<http://panasonic.co.jp/semicon/e-index.html>

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technical information described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the technical information as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.