



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Ratings



Voltage: 300 V
 Temperature: -10 ~ 80 °C

Conductor

Gauge: 24 AWG, 0.22 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm
 Strand count: 11


Outer jacket

Material: PVC, 80 °C
 Color: black and red
 Thickness: 0.38 mm
 Diameter: 3.0 ±0.20 mm (1.5 x 3.0)

Wire marking: E339579  AWM STYLE 2468 24AWG 80°C
 300V VW-1 --- C  AWM I A 80°C 300V FT1 TENSILITY

Tests

Voltage test: 300 V
 Max resistance at 20 °C: 94.2 ohm/km
 Spark test: 3.0/4.0 kV
 Tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±1 °C /1 hour, no observed cracking
 Flammability: VW-1
 Dielectric test: 1500 V ac for 1 minute without breakdown

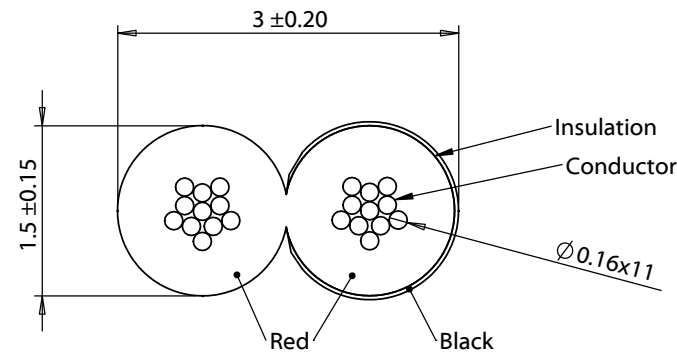

REVISION	DATE	DESCRIPTION
A	7/22/2014	Initial release
A1	10/14/2014	Updated jacket construction
A2	9/8/2015	Updated jacket tolerance

PREPARED:
AG 2015.09.08 15:33:40 -07'00'

VERIFIED:
JM 2015.09.09 07:34:58 -07'00'

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

NOTES:
 RoHS and REACH compliant
 Electrical test: no open, no short circuit, no intermittent

DESCRIPTION:
 Wire, 2C TS, 24 AWG, UL2468, 300V, 80°C, 3.0 mm, VW-1, PVC, red and black

TENSILITY

20802 Sockeye Place #130
 Bend, OR 97701 USA
 tel 541.323.3228 fax 541.323.4202
 800 877.670.7118 www.tensility.com

SIZE A	PART NUMBER 30-00418
SCALE: 15:1	WEIGHT:
SHEET 1 OF 1	