



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/2/01
A	ADD NOTES	6/15/01
B	1816 CHANGE C-2V TO C-2F	11/16/07
C	1816 VENDOR CHNG FILAMENT	7/5/11

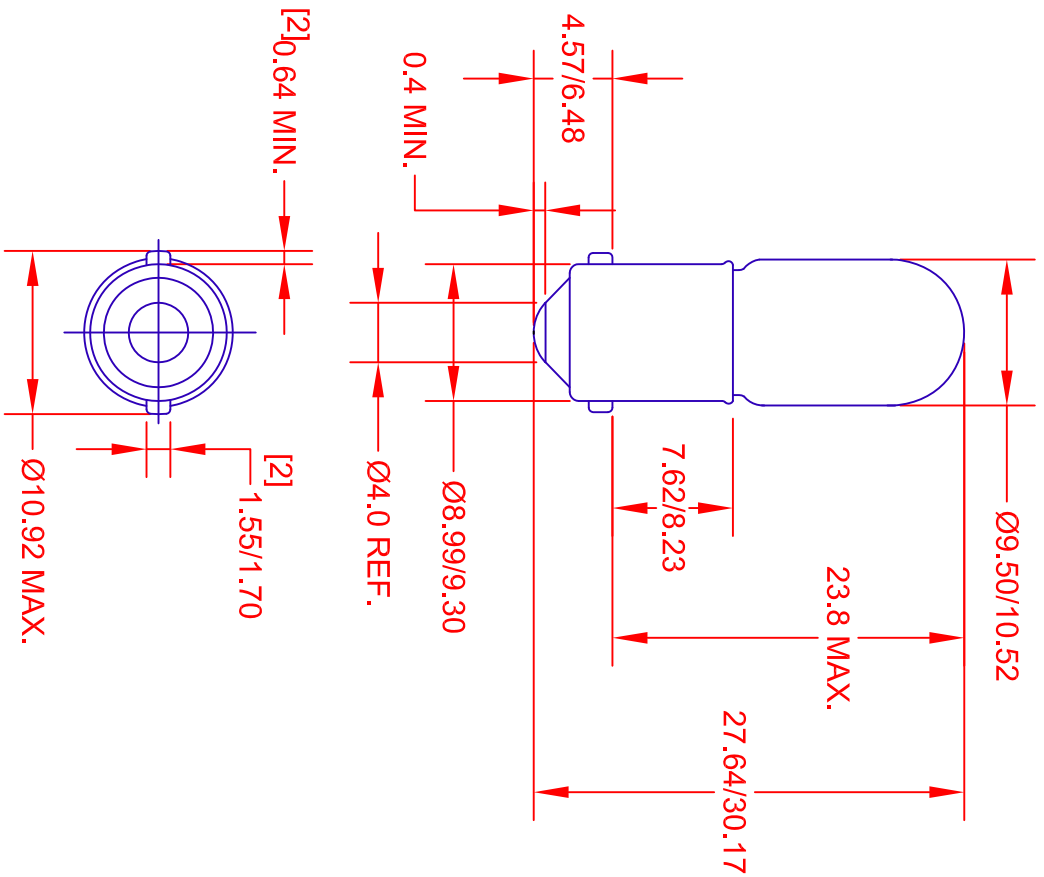

NOTES:
 1. FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TO THE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO ITS ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.

2. FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLY LINK AT THE APPROXIMATE RATE OF 50-150 FLASHERS PER MINUTE AT A NORMAL ROOM TEMPERATURE. SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
49	2.0	.060	.04	0.50	1,000	S-2
1436	2.5	.300	.30	3.77	1,000	C-2R
43	2.5	.500	.50	6.29	3,000	C-2R
1490	3.2	.160	.20	2.51	3,000	C-2R
45	3.2	.350	.50	6.29	3,000	C-2R
1850	5.0	.090	.25	3.14	1,500	C-2R
316	6.0	.700	3.40	42.74	500	C-2R
755	6.3	.150	.33	4.15	20,000	C-2V
47	6.3	.150	.52	6.54	3,000	C-2R
1866	6.3	.250	.65	8.17	10,000	C-2R
44	6.3	.250	.90	11.31	3,000	C-2R
1888	7.0	.500	2.00	25.14	3,000	C-2R
1816	13.0	.330	3.00	37.71	1,000	C-2V
756	14.0	.080	.31	3.90	15,000	C-2F
1815	14.0	.200	1.40	17.60	3,000	C-2V
1891	14.0	.240	2.00	25.14	500	C-2F
*256	14.0	.270	1.60	20.11	500	C-2R
1893	14.0	.330	2.00	25.14	7,500	C-2F
1813	14.4	.100	.86	10.81	1,000	C-2V
1892	14.4	.120	.75	9.43	1,000	C-2F
1818	24.0	.170	3.30	41.48	250	C-2F
1819	28.0	.040	.34	4.27	2,500	C-2F
1829	28.0	.070	1.00	12.57	1,000	C-2F
757	28.0	.080	.62	7.79	15,000	C-2F
1820	28.0	.100	1.60	20.11	1,000	C-2F
1864	28.0	.170	3.00	37.71	1,500	C-2F
313	28.0	.170	3.50	44.00	500	C-2F
1873	28.0	.200	3.00	37.71	7,000	C-2F
1822	36.0	.100	2.10	26.40	1,000	C-2F
1828	37.5	.050	.65	8.17	3,000	C-2F
1835	55.0	.050	1.10	13.83	5,000	C-2F
RB22	130.0	.027	.600	7.54	5,000	C-5

*FLASHER TYPE LAMP

METRIC		DIMENSIONS ARE IN MILLIMETERS		JKL COMPONENTS CORPORATION TITLE T-3 1/4 MINIATURE SINGLE CONTACT BAYONET	
THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- .02 2 PL +/- .020 ANGLE +/- 0			
DRAWN BY L. WENGSTROM	APPRVD BY L.R.	DATE 7/5/11	SCALE A	FSGM NO. 55335	DRAWING NO. BAYONET SINGLE CONTACT T-3 1/4
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 3/2/01	REVISION DATE 7/5/11
			REV. NO. C	SHEET NO. 1 OF 1	